





**BUREAU
VERITAS**

Test Report

Applicant	Blues Inc. 50 Dunham Ridge Rd Ste 1650 Beverly, MA 01915, USA
Manufacturer	Same as Applicant
Factory	B. L. Manufacturing d.o.o. Medarska 69/1 10000, Zagreb, Croatia
Items tested	WWXDW, NBGLW, NBNAW, WBEXW, and WBNAW
Specifications	IEC 62368-1:2018 and IEC 62368-1:2014
Results	As detailed in attached report
Prepared by	 Khanh Do Product Safety Engineer II
Authorized by	 Denys Antonov Sr. Engineer Product Safety
Issued Date	2023-Oct-20
Conditions of issue	This Test Report is issued subject to the conditions stated in 'Conditions of Testing' section of this report

Cover Letter

Robert [REDACTED]
Blues Inc.
50 Dunham Ridge Rd Ste 1650
Beverly, MA 01915

Dear Mr. [REDACTED]

The following is the evaluation of the Blues' Notecard models WWXDW, NBGLW, NBNAW, WBEXW, and WBNAW in accordance with IEC 62368-1:2018 (Third Edition) and IEC 62368-1:2014 (Second Edition).

The above mentioned product was found to meet the requirements. This conclusion was reached after examination of the submitted samples.

If you have any questions feel free to contact me at 978-698-6319.

Sincerely,



Khanh Do
Product Safety Test Engineer II
Bureau Veritas Consumer Products Services, Inc.

Tel: 978-698-6139

Fax: 978-486-8828




Email: khanh.do@bureauveritas.com

Address: One Distribution Center Circle, Suite #1, Littleton, MA 01460, USA

Test Report issued under the responsibility of:



TEST REPORT IEC 62368-1 Audio/video, information and communication technology equipment Part 1: Safety requirements	
Report Number.....	LIT04230535 CE
Date of issue	2023-Oct-20
Total number of pages	93
Name of Testing Laboratory preparing the Report	Bureau Veritas Consumer Products Services
Applicant's name	Blues Inc.
Address	50 Dunham Ridge Rd Suite 1650 Beverly, MA 01915, USA
Test specification:	
Standard	IEC 62368-1:2018 and IEC 62368-1:2014
Test procedure.....	CE Informative
Non-standard test method.....	N/A
TRF template used	IECEE OD-2020-F1:2021, Ed.1.4
Test Report Form No.	IEC62368_1E
Test Report Form(s) Originator.....	UL(US)
Master TRF	Dated 2022-04-14
Copyright © 2022 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.	
<small>This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.</small>	
This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.	
General disclaimer:	
<small>The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.</small>	

Test item description	Embeddable module for cellular connectivity	
Trade Mark(s)		
Manufacturer	Blues Inc. 50 Dunham Ridge Rd Suite 1650 Beverly, MA 01915, USA	
Model/Type reference	WWXDW, NBGLW, NBNAW, WBEXW, WBNAW	
Ratings	1.71-3.6 V d.c or 5Vdc (Micro USB cable)	
Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):		
<input checked="" type="checkbox"/> Testing Laboratory:	Bureau Veritas Consumer Products Services Inc.	
Testing location/ address	One distribution Center Circle, Suite #1, Littleton MA 01460 USA	
Tested by (name, function, signature)		Khanh Do Product Safety Engineer II
Approved by (name, function, signature) ..		Denys Antonov Sr. Engineer Product Safety
<input type="checkbox"/> Testing procedure: CTF Stage 1:	--	
Testing location/ address	--	
Tested by (name, function, signature)	--	--
Approved by (name, function, signature) ..	--	--
<input type="checkbox"/> Testing procedure: CTF Stage 2:	--	
Testing location/ address	--	
Tested by (name, function, signature)	--	--
Witnessed by (name, function, signature) . :	--	--
Approved by (name, function, signature) .. :	--	--
<input type="checkbox"/> Testing procedure: CTF Stage 3:	--	
<input type="checkbox"/> Testing procedure: CTF Stage 4:	--	
Testing location/ address	--	
Tested by (name, function, signature)	--	--
Witnessed by (name, function, signature) . :	--	--
Approved by (name, function, signature) .. :	--	--
Supervised by (name, function, signature) :	--	--

List of Attachments (including a total number of pages in each attachment):	
Attachment 1: National Differences (22 pages)	
Attachment 2: Supplementary Test Data / Test Equipment / Measurement Uncertainty (9 pages)	
Attachment 3: Certificates / Component Information (1 pages)	
Attachment 4: Illustrations / Photographs (2 pages)	
Conditions of Testing (2 pages)	
Summary of testing:	
Tests performed (name of test and test clause):	Testing location:
WO# X0535, Test Report No. LIT04230535 CE <ul style="list-style-type: none"> - 5.2 Classification of energy source - 5.4.1.4, 9.3, B.1.5, B.2.6 Temperature Measurements - 6.2.2 Power source circuit classification - B.2.5 Input test - B.4 Single Fault Condition Test - F.3.10 Test for the Permanence of Markings 	Bureau Veritas Consumer Products Services Inc. One distribution Center Circle, Suite #1, Littleton MA 01460 USA Original test results are kept on file at the address above
Summary of compliance with National Differences (List of countries addressed):	
EU-European Group and National Differences	
<input checked="" type="checkbox"/> The product fulfils the requirements of IEC 62368-1:2018, IEC 62368-1:2014, EN 62368-1:2014+A11:2017	

Use of uncertainty of measurement for decisions on conformity (decision rule):

No decision rule is specified by the IEC standard, when comparing the measurement result with the applicable limit according to the specification in that standard. The decisions on conformity are made without applying the measurement uncertainty (“simple acceptance” decision rule, previously known as “accuracy method”).

Internal procedure used for type testing through which traceability of the measuring uncertainty has been established:

Procedure number, issue date and title: LIT-SOP-0005, April 12, 2020, Measurement Uncertainty

Information on uncertainty of measurement:

The uncertainties of measurement are calculated by the laboratory based on application of criteria given by OD-5014 for test equipment and application of test methods, decision sheets and operational procedures of IECEE.

IEC Guide 115 provides guidance on the application of measurement uncertainty principles and applying the decision rule when reporting test results within IECEE scheme, noting that the reporting of the measurement uncertainty for measurements is not necessary unless required by the test standard or customer.

Calculations leading to the reported values are on file with the NCB and testing laboratory that conducted the testing.

Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.



Test item particulars:	
Product group	<input type="checkbox"/> end product <input checked="" type="checkbox"/> built-in component
Classification of use by	<input checked="" type="checkbox"/> Ordinary person <input type="checkbox"/> Children likely present <input type="checkbox"/> Instructed person <input type="checkbox"/> Skilled person
Supply connection	<input type="checkbox"/> AC mains <input type="checkbox"/> DC mains <input checked="" type="checkbox"/> not mains connected: <input checked="" type="checkbox"/> ES1 <input type="checkbox"/> ES2 <input type="checkbox"/> ES3
Supply tolerance	<input type="checkbox"/> +10%/-10% <input type="checkbox"/> +20%/-15% <input type="checkbox"/> + %/ - % <input checked="" type="checkbox"/> None
Supply connection – type	<input type="checkbox"/> pluggable equipment type A - <input type="checkbox"/> non-detachable supply cord <input type="checkbox"/> appliance coupler <input type="checkbox"/> direct plug-in <input type="checkbox"/> pluggable equipment type B - <input type="checkbox"/> non-detachable supply cord <input type="checkbox"/> appliance coupler <input type="checkbox"/> permanent connection <input type="checkbox"/> mating connector <input checked="" type="checkbox"/> other: Soldered pins on bottom of module
Considered current rating of protective device	<input type="checkbox"/> A; Location: <input type="checkbox"/> building <input type="checkbox"/> equipment <input checked="" type="checkbox"/> N/A
Equipment mobility	<input type="checkbox"/> movable <input type="checkbox"/> hand-held <input type="checkbox"/> transportable <input type="checkbox"/> direct plug-in <input type="checkbox"/> stationary <input checked="" type="checkbox"/> for building-in <input type="checkbox"/> wall/ceiling-mounted <input type="checkbox"/> SRME/rack-mounted <input type="checkbox"/> other:
Overvoltage category (OVC)	<input checked="" type="checkbox"/> OVC I <input type="checkbox"/> OVC II <input type="checkbox"/> OVC III <input type="checkbox"/> OVC IV <input type="checkbox"/> other:
Class of equipment	<input type="checkbox"/> Class I <input type="checkbox"/> Class II <input checked="" type="checkbox"/> Class III <input type="checkbox"/> Not classified <input type="checkbox"/>
Special installation location	<input checked="" type="checkbox"/> N/A <input type="checkbox"/> restricted access area <input type="checkbox"/> outdoor location <input type="checkbox"/>
Pollution degree (PD)	<input type="checkbox"/> PD 1 <input checked="" type="checkbox"/> PD 2 <input type="checkbox"/> PD 3
Manufacturer's specified T_{ma}	85 °C <input type="checkbox"/> Outdoor: minimum °C
IP protection class	<input type="checkbox"/> IPX0 <input checked="" type="checkbox"/> IP00
Power systems	<input type="checkbox"/> TN <input type="checkbox"/> TT <input type="checkbox"/> IT - V _{L-L} <input checked="" type="checkbox"/> not AC mains
Altitude during operation (m)	<input checked="" type="checkbox"/> 2000 m or less <input type="checkbox"/> m
Altitude of test laboratory (m)	<input checked="" type="checkbox"/> 2000 m or less <input type="checkbox"/> m
Mass of equipment (kg)	0.02 kg

Possible test case verdicts:	
- test case does not apply to the test object.....:	N/A
- test object does meet the requirement.....:	P (Pass)
- test object does not meet the requirement.....:	F (Fail)
Testing:	
Date of receipt of test item	Aug 29, 2023
Date (s) of performance of tests	Aug 31, 2023 - Sept 13, 2023
General remarks:	
<p>"(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report.</p> <p>Throughout this report a <input type="checkbox"/> comma / <input checked="" type="checkbox"/> point is used as the decimal separator.</p> <p><input checked="" type="checkbox"/> This Test Report Form contains requirements according to IEC 62368-1 Standard Oct 2018 (Note: The above text maybe removed if not applicable)</p>	
Manufacturer's Declaration per sub-clause 4.2.5 of IEC 62368-1:	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> Not applicable
When differences exist; they shall be identified in the General product information section.	
Name and address of factory (ies)	B. L. Manufacturing d.o.o. Medarska 69/1 10000, Zagreb, Croatia
General product information and other remarks:	
<p>The Notecard is a device-to-cloud data pump that reduces the complexity of building connected solutions with a secure, reliable cellular or Wi-Fi connection. It's a 30x35 millimeter System-on-Module (SOM).</p>	
Model Differences:	
<ul style="list-style-type: none"> • NOTE-NBGLW • NOTE-NBNAW • NOTE-WBEXW • NOTE-WBGLW • NOTE-WBNAW <p>The NOTE-WBNAW was considered to be the worst-case device amongst this family of devices for purposes of certification testing.</p> <p>Self-declaration letter for the worse case from the manufacturer is included in the Attachment 3 of this report.</p>	

Engineering Considerations:

The maximum operating temperature considered is 85°C

The manufacturer shall ensure that operating instructions, rating labels and warning labels are written in an accepted or official language of the respective countries.

Temperature test result are for informative only. The evaluation to be determined as part of the end-product.

Conditions of Acceptability: N/A

History:

Project Number	Date	Description	Engineer
X0535 LIT04230535 CE	2023-Oct-20	Original Test Report	Khanh Do

Note to Inspector: N/A


Routine Tests: N/A

OVERVIEW OF ENERGY SOURCES AND SAFEGUARDS				
Clause	Possible Hazard			
5	Electrically-caused injury			
Class and Energy Source (e.g. ES3: Primary circuit)	Body Part (e.g. Ordinary)	Safeguards		
		B	S	R
ES1: entire circuit	Instructed, skilled	N/A	N/A	N/A
6	Electrically-caused fire			
Class and Energy Source (e.g. PS2: 100 Watt circuit)	Material part (e.g. Printed board)	Safeguards		
		B	1 st S	2 nd S
PS1: entire circuit	PCB and parts on PCB	N/A	N/A	N/A
7	Injury caused by hazardous substances			
Class and Energy Source (e.g. Ozone)	Body Part (e.g., Skilled)	Safeguards		
		B	S	R
None	Instructed, skilled	N/A	N/A	N/A
8	Mechanically-caused injury			
Class and Energy Source (e.g. MS3: Plastic fan blades)	Body Part (e.g. Ordinary)	Safeguards		
		B	S	R
MS1: whole product (mass = 0.020kg)	Instructed, skilled	N/A	N/A	N/A
9	Thermal burn			
Class and Energy Source (e.g. TS1: Keyboard caps)	Body Part (e.g., Ordinary)	Safeguards		
		B	S	R
TS1: all parts	Instructed, skilled	N/A	N/A	N/A
10	Radiation			
Class and Energy Source (e.g. RS1: PMP sound output)	Body Part (e.g., Ordinary)	Safeguards		
		B	S	R
None	Instructed, skilled	N/A	N/A	N/A
Supplementary Information:				
“B” – Basic Safeguard; “S” – Supplementary Safeguard; “R” – Reinforced Safeguard				

ENERGY SOURCE DIAGRAM

Optional. Manufacturers are to provide the energy sources diagram identify declared energy sources and identifying the demarcations are between power sources. Recommend diagram be provided included in power supply and multipart systems.

Insert diagram below. Example diagram designs are; Block diagrams; image(s) with layered data; mechanical drawings

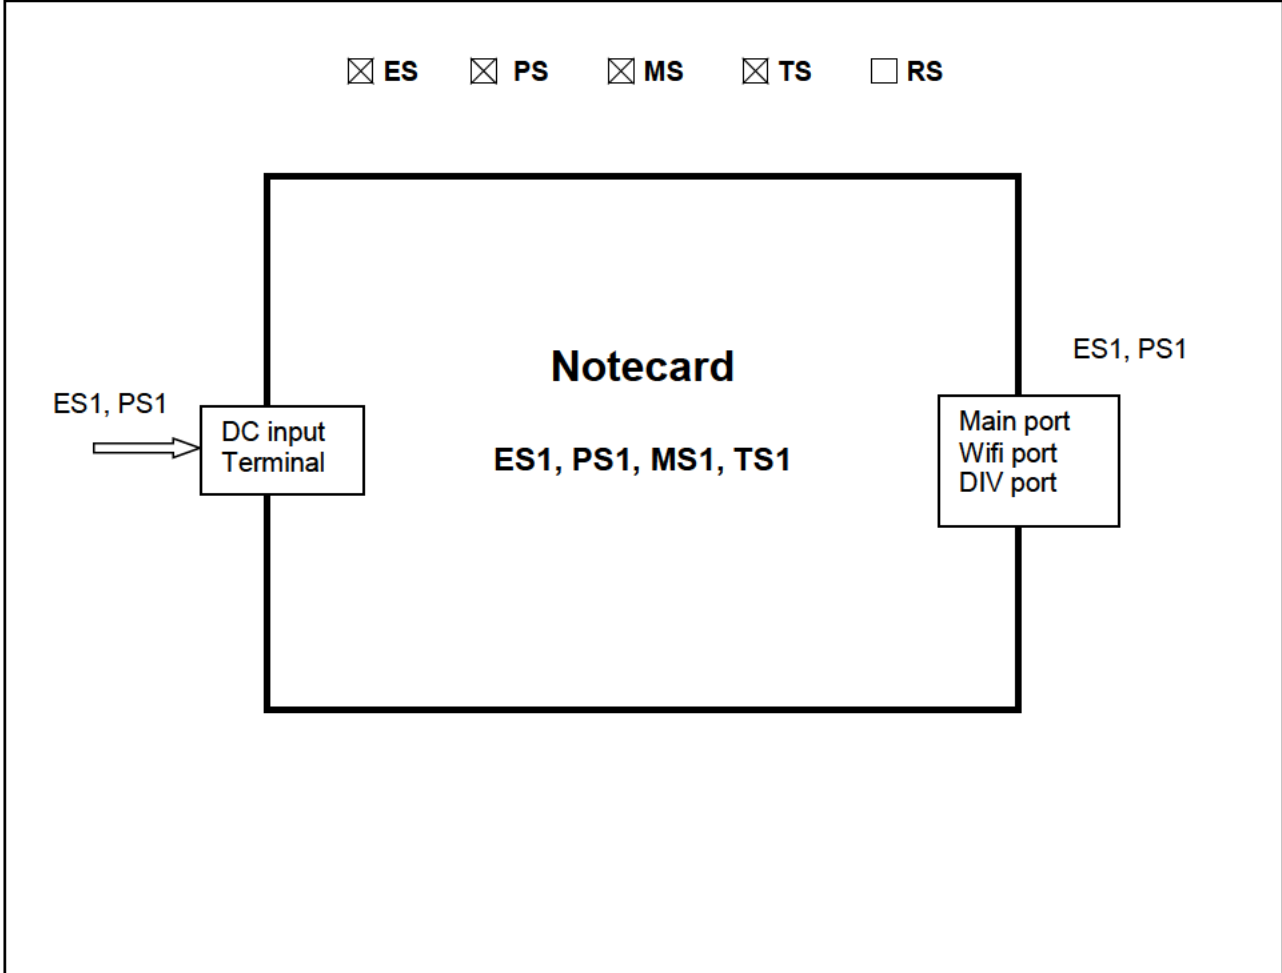

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
4	GENERAL REQUIREMENTS		P
4.1.1	Acceptance of materials, components and subassemblies		P
4.1.2	Use of components	See appended table 4.1.2 for components related to safety	P
4.1.3	Equipment design and construction	Design and construction have been inspected and tested for verification	P
4.1.4	Specified ambient temperature for outdoor use (°C) :	For installation inside a final equipment	N/A
4.1.5	Constructions and components not specifically covered	None present	N/A
4.1.8	Liquids and liquid filled components (LFC)	None present (See G.15)	N/A
4.1.15	Markings and instructions	See Annex F	P
4.4.3	Safeguard robustness		N/A
4.4.3.1	General		N/A
4.4.3.2	Steady force tests		N/A
4.4.3.3	Drop tests		N/A
4.4.3.4	Impact tests		N/A
4.4.3.5	Internal accessible safeguard tests		N/A
4.4.3.6	Glass impact tests		N/A
4.4.3.7	Glass fixation tests		N/A
	Glass impact test (1J)		N/A
	Push/pull test (10 N)		N/A
4.4.3.8	Thermoplastic material tests		N/A
4.4.3.9	Air comprising a safeguard		N/A
4.4.3.10	Accessibility, glass, safeguard effectiveness		N/A
4.4.4	Displacement of a safeguard by an insulating liquid	No insulating liquid	N/A
4.4.5	Safety interlocks	No safety interlock	N/A
4.5	Explosion		N/A
4.5.1	General	Explosion is unlikely (See Annex M for batteries)	N/A
4.5.2	No explosion during normal/abnormal operating condition	No explosions (See Clause B.2, B.3)	N/A
	No harm by explosion during single fault conditions	No explosions (See Clause B.4)	N/A
4.6	Fixing of conductors		P
	Fix conductors not to defeat a safeguard	Inspected and verified	P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Compliance is checked by test..... :	(See Clause T.2)	N/A
4.7	Equipment for direct insertion into mains socket-outlets		N/A
4.7.2	Mains plug part complies with relevant standard .. :	No such mains plug part	N/A
4.7.3	Torque (Nm)		N/A
4.8	Equipment containing coin/button cell batteries		N/A
4.8.1	General	No coin/button cell batteries present	N/A
4.8.2	Instructional safeguard	None	N/A
4.8.3	Battery compartment door/cover construction	None	N/A
	Open torque test		N/A
4.8.4.2	Stress relief test	None	N/A
4.8.4.3	Battery replacement test	None	N/A
4.8.4.4	Drop test	None	N/A
4.8.4.5	Impact test	None	N/A
4.8.4.6	Crush test	None	N/A
4.8.5	Compliance	None	N/A
	30N force test with test probe		N/A
	20N force test with test hook		N/A
4.9	Likelihood of fire or shock due to entry of conductive object		N/A
4.10	Component requirements		N/A
4.10.1	Disconnect Device	No connection to mains (See Annex L)	N/A
4.10.2	Switches and relays	No PS3 switches or relays (See Annex G)	N/A

5	ELECTRICALLY-CAUSED INJURY		P
5.2	Classification and limits of electrical energy sources		P
5.2.2	ES1, ES2 and ES3 limits	ES1	P
5.2.2.2	Steady-state voltage and current limits	5.0Vdc (See appended table 5.2)	P
5.2.2.3	Capacitance limits	No capacitance voltages (See appended table 5.2)	N/A
5.2.2.4	Single pulse limits	No impulse voltages (See appended table 5.2)	N/A
5.2.2.5	Limits for repetitive pulses	No repetitive impulses (See appended table 5.2)	N/A
5.2.2.6	Ringling signals	No ringling signals (See Annex H)	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.2.2.7	Audio signals	No audio outputs (See Clause E.1)	N/A
5.3	Protection against electrical energy sources		N/A
5.3.1	General Requirements for accessible parts to ordinary, instructed and skilled persons	ES1 only	N/A
5.3.1 a)	Accessible ES1/ES2 derived from ES2/ES3 circuits	ES2/ES3 not present	N/A
5.3.1 b)	Skilled persons not unintentional contact ES3 bare conductors	ES3 not present	N/A
5.3.2.1	Accessibility to electrical energy sources and safeguards	ES2/ES3 not present	N/A
	Accessibility to outdoor equipment bare parts		N/A
5.3.2.2	Contact requirements	ES3 not present	N/A
	Test with test probe from Annex V		—
5.3.2.2 a)	Air gap – electric strength test potential (V)	(See appended table 5.4.9)	N/A
5.3.2.2 b)	Air gap – distance (mm)		N/A
5.3.2.3	Compliance		N/A
5.3.2.4	Terminals for connecting stripped wire		N/A
5.4	Insulation materials and requirements		P
5.4.1.2	Properties of insulating material	ES1 only	N/A
5.4.1.3	Material is non-hygroscopic		N/A
5.4.1.4	Maximum operating temperature for insulating materials	TS1 only	P
5.4.1.5	Pollution degrees	PD2	P
5.4.1.5.2	Test for pollution degree 1 environment and for an insulating compound		N/A
5.4.1.5.3	Thermal cycling test		N/A
5.4.1.6	Insulation in transformers with varying dimensions		N/A
5.4.1.7	Insulation in circuits generating starting pulses		N/A
5.4.1.8	Determination of working voltage	ES1 only	N/A
5.4.1.9	Insulating surfaces		N/A
5.4.1.10	Thermoplastic parts on which conductive metallic parts are directly mounted	No such thermoplastic parts	N/A
5.4.1.10.2	Vicat test.....		N/A
5.4.1.10.3	Ball pressure test		N/A
5.4.2	Clearances	Functional insulation only	N/A
5.4.2.1	General requirements		N/A
	Clearances in circuits connected to AC Mains, Alternative method		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.4.2.2	Procedure 1 for determining clearance	Not applicable	N/A
	Temporary overvoltage		—
5.4.2.3	Procedure 2 for determining clearance	Not applicable	N/A
5.4.2.3.2.2	a.c. mains transient voltage	None	—
5.4.2.3.2.3	d.c. mains transient voltage	None	—
5.4.2.3.2.4	External circuit transient voltage.....	None	—
5.4.2.3.2.5	Transient voltage determined by measurement	None	—
5.4.2.4	Determining the adequacy of a clearance using an electric strength test	ES1 only	N/A
5.4.2.5	Multiplication factors for clearances and test voltages		N/A
5.4.2.6	Clearance measurement	(See appended table 5.4.2)	N/A
5.4.3	Creepage distances	Functional insulation only	N/A
5.4.3.1	General		N/A
5.4.3.3	Material group		—
5.4.3.4	Creepage distances measurement		N/A
5.4.4	Solid insulation	Functional insulation only	N/A
5.4.4.1	General requirements		N/A
5.4.4.2	Minimum distance through insulation		N/A
5.4.4.3	Insulating compound forming solid insulation		N/A
5.4.4.4	Solid insulation in semiconductor devices		N/A
5.4.4.5	Insulating compound forming cemented joints	No insulating compound	N/A
5.4.4.6	Thin sheet material	No thin sheet material	N/A
5.4.4.6.1	General requirements	None	N/A
5.4.4.6.2	Separable thin sheet material	None	N/A
	Number of layers (pcs)	None	N/A
5.4.4.6.3	Non-separable thin sheet material	None	N/A
	Number of layers (pcs)		N/A
5.4.4.6.4	Standard test procedure for non-separable thin sheet material		N/A
5.4.4.6.5	Mandrel test		N/A
5.4.4.7	Solid insulation in wound components	No wound components	N/A
5.4.4.9	Solid insulation at frequencies >30 kHz, E_P , K_R , d , V_{PW} (V)		N/A
	Alternative by electric strength test, tested voltage (V), K_R		N/A
5.4.5	Antenna terminal insulation		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.4.5.1	General	ES1 antenna only	N/A
5.4.5.2	Voltage surge test		N/A
5.4.5.3	Insulation resistance (MΩ)..... :	ES1 antenna only	N/A
	Electric strength test :	ES1 antenna only	N/A
5.4.6	Insulation of internal wire as part of supplementary safeguard		N/A
5.4.7	Tests for semiconductor components and for cemented joints	ES1 semiconductor parts only	N/A
5.4.8	Humidity conditioning	None	N/A
	Relative humidity (%), temperature (°C), duration (h) :	None	—
5.4.9	Electric strength test	Functional insulation only	N/A
5.4.9.1	Test procedure for type test of solid insulation..... :		N/A
5.4.9.2	Test procedure for routine test		N/A
5.4.10	Safeguards against transient voltages from external circuits	No external circuit	N/A
5.4.10.1	Parts and circuits separated from external circuits		N/A
5.4.10.2	Test methods		N/A
5.4.10.2.1	General		N/A
5.4.10.2.2	Impulse test :	(See appended table 5.4.9)	N/A
5.4.10.2.3	Steady-state test..... :	(See appended table 5.4.9)	N/A
5.4.10.3	Verification for insulation breakdown for impulse test :		N/A
5.4.11	Separation between external circuits and earth	No earthed circuitry	N/A
5.4.11.1	Exceptions to separation between external circuits and earth		N/A
5.4.11.2	Requirements		N/A
	SPDs bridge separation between external circuit and earth		N/A
	Rated operating voltage U_{op} (V)..... :	None	—
	Nominal voltage U_{peak} (V)..... :	None	—
	Max increase due to variation ΔU_{sp} :	None	—
	Max increase due to ageing ΔU_{sa} :	None	—
5.4.11.3	Test method and compliance :	(See appended table 5.4.9)	N/A
5.4.12	Insulating liquid	No liquid present	N/A
5.4.12.1	General requirements		N/A
5.4.12.2	Electric strength of an insulating liquid :	(See appended table 5.4.9)	N/A
5.4.12.3	Compatibility of an insulating liquid :	(See appended table 5.4.9)	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.4.12.4	Container for insulating liquid		N/A
5.5	Components as safeguards		N/A
5.5.1	General	No components used as safeguards	N/A
5.5.2	Capacitors and RC units	None	N/A
5.5.2.1	General requirement		N/A
5.5.2.2	Safeguards against capacitor discharge after disconnection of a connector	(See appended table 5.5.2.2)	N/A
5.5.3	Transformers	None	N/A
5.5.4	Optocouplers	None (See sub-clause 5.4 or Clause G.12)	N/A
5.5.5	Relays	None (See sub-clause 5.4)	N/A
5.5.6	Resistors	None (See Clause G.10)	N/A
5.5.7	SPDs	None (See Clause G.8)	N/A
5.5.8	Insulation between the mains and an external circuit consisting of a coaxial cable	None	N/A
5.5.9	Safeguards for socket-outlets in outdoor equipment	None	N/A
	RCD rated residual operating current (mA)		—
5.6	Protective conductor		N/A
5.6.2	Requirement for protective conductors	Class III equipment	N/A
5.6.2.1	General requirements		N/A
5.6.2.2	Colour of insulation		N/A
5.6.3	Requirement for protective earthing conductors		N/A
	Protective earthing conductor size (mm ²)	None	—
	Protective earthing conductor serving as a reinforced safeguard		N/A
	Protective earthing conductor serving as a double safeguard		N/A
5.6.4	Requirements for protective bonding conductors		N/A
5.6.4.1	Protective bonding conductors		N/A
	Protective bonding conductor size (mm ²)	None	—
5.6.4.2	Protective current rating (A)		N/A
5.6.5	Terminals for protective conductors		N/A
5.6.5.1	Terminal size for connecting protective earthing conductors (mm)		N/A
	Terminal size for connecting protective bonding conductors (mm)		N/A
5.6.5.2	Corrosion		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.6.6	Resistance of the protective bonding system		N/A
5.6.6.1	Requirements		N/A
5.6.6.2	Test Method..... :	(See appended table 5.6.6)	N/A
5.6.6.3	Resistance (Ω) or voltage drop..... :	(See appended table 5.6.6)	N/A
5.6.7	Reliable connection of a protective earthing conductor		N/A
5.6.8	Functional earthing		N/A
	Conductor size (mm ²)..... :		N/A
	Class II with functional earthing marking :		N/A
	Appliance inlet cl & cr (mm)..... :		N/A
5.7	Prospective touch voltage, touch current and protective conductor current		N/A
5.7.2	Measuring devices and networks		N/A
5.7.2.1	Measurement of touch current	ES1 only	N/A
5.7.2.2	Measurement of voltage		N/A
5.7.3	Equipment set-up, supply connections and earth connections		N/A
5.7.4	Unearthed accessible parts :	(See appended table 5.7.4)	N/A
5.7.5	Earthed accessible conductive parts :	(See appended table 5.7.5)	N/A
5.7.6	Requirements when touch current exceeds ES2 limits		N/A
	Protective conductor current (mA)..... :		N/A
	Instructional Safeguard..... :		N/A
5.7.7	Prospective touch voltage and touch current associated with external circuits		N/A
5.7.7.1	Touch current from coaxial cables		N/A
5.7.7.2	Prospective touch voltage and touch current associated with paired conductor cables		N/A
5.7.8	Summation of touch currents from external circuits		N/A
	a) Equipment connected to earthed external circuits, current (mA) :		N/A
	b) Equipment connected to unearthed external circuits, current (mA) :		N/A
5.8	Backfeed safeguard in battery backed up supplies		N/A
	Mains terminal ES..... :	No battery backed up supplies	N/A
	Air gap (mm) :		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
6	ELECTRICALLY- CAUSED FIRE		P
6.2	Classification of PS and PIS		P
6.2.2	Power source circuit classifications	PS1 (See appended table 6.2.2)	P
6.2.3	Classification of potential ignition sources		N/A
6.2.3.1	Arcing PIS	PS1 only	N/A
6.2.3.2	Resistive PIS	PS1 only	N/A
6.3	Safeguards against fire under normal operating and abnormal operating conditions		N/A
6.3.1	No ignition and attainable temperature value less than 90 % defined by ISO 871 or less than 300 °C for unknown materials	ES1 only	N/A
	Combustible materials outside fire enclosure		N/A
6.4	Safeguards against fire under single fault conditions		N/A
6.4.1	Safeguard method	PS1 only	N/A
6.4.2	Reduction of the likelihood of ignition under single fault conditions in PS1 circuits	Not used	N/A
6.4.3	Reduction of the likelihood of ignition under single fault conditions in PS2 and PS3 circuits	Not used	N/A
6.4.3.1	Supplementary safeguards		N/A
6.4.3.2	Single Fault Conditions		N/A
	Special conditions for temperature limited by fuse		N/A
6.4.4	Control of fire spread in PS1 circuits		P
6.4.5	Control of fire spread in PS2 circuits		N/A
6.4.5.2	Supplementary safeguards		N/A
6.4.6	Control of fire spread in PS3 circuits		N/A
6.4.7	Separation of combustible materials from a PIS		N/A
6.4.7.2	Separation by distance		N/A
6.4.7.3	Separation by a fire barrier		N/A
6.4.8	Fire enclosures and fire barriers		N/A
6.4.8.2	Fire enclosure and fire barrier material properties		N/A
6.4.8.2.1	Requirements for a fire barrier		N/A
6.4.8.2.2	Requirements for a fire enclosure		N/A
6.4.8.3	Constructional requirements for a fire enclosure and a fire barrier		N/A
6.4.8.3.1	Fire enclosure and fire barrier openings		N/A
6.4.8.3.2	Fire barrier dimensions		N/A
6.4.8.3.3	Top openings and properties		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Openings dimensions (mm)..... :		N/A
6.4.8.3.4	Bottom openings and properties		N/A
	Openings dimensions (mm)..... :		N/A
	Flammability tests for the bottom of a fire enclosure	(See Clause S.3)	N/A
	Instructional Safeguard..... :		N/A
6.4.8.3.5	Side openings and properties		N/A
	Openings dimensions (mm)..... :		N/A
6.4.8.3.6	Integrity of a fire enclosure, condition met: a), b) or c)..... :		N/A
6.4.8.4	Separation of a PIS from a fire enclosure and a fire barrier distance (mm) or flammability rating..... :		N/A
6.4.9	Flammability of insulating liquid..... :		N/A
6.5	Internal and external wiring		N/A
6.5.1	General requirements	No PS2 or PS3 circuits	N/A
6.5.2	Requirements for interconnection to building wiring..... :	No interconnection to building wiring	N/A
6.5.3	Internal wiring size (mm ²) for socket-outlets..... :	No socket-outlets	N/A
6.6	Safeguards against fire due to the connection to additional equipment		N/A

7	INJURY CAUSED BY HAZARDOUS SUBSTANCES		N/A
7.2	Reduction of exposure to hazardous substances		N/A
7.3	Ozone exposure		N/A
7.4	Use of personal safeguards or personal protective equipment (PPE)		N/A
	Personal safeguards and instructions..... :	No hazardous substances	—
7.5	Use of instructional safeguards and instructions		N/A
	Instructional safeguard (ISO 7010)..... :	No hazardous substances	—
7.6	Batteries and their protection circuits		N/A

8	MECHANICALLY-CAUSED INJURY		P
8.2	Mechanical energy source classifications		P
8.3	Safeguards against mechanical energy sources		N/A
8.4	Safeguards against parts with sharp edges and corners		N/A
8.4.1	Safeguards	MS1 only	N/A
	Instructional Safeguard..... :	None required	N/A
8.4.2	Sharp edges or corners	No sharp edges or corners	N/A
8.5	Safeguards against moving parts		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
8.5.1	Fingers, jewellery, clothing, hair, etc., contact with MS2 or MS3 parts	No MS2/MS3 parts present	N/A
	MS2 or MS3 part required to be accessible for the function of the equipment		N/A
	Moving MS3 parts only accessible to skilled person		N/A
8.5.2	Instructional safeguard	None required	N/A
8.5.4	Special categories of equipment containing moving parts		N/A
8.5.4.1	General	No such equipment present	N/A
8.5.4.2	Equipment containing work cells with MS3 parts	No such equipment present	N/A
8.5.4.2.1	Protection of persons in the work cell		N/A
8.5.4.2.2	Access protection override		N/A
8.5.4.2.2.1	Override system		N/A
8.5.4.2.2.2	Visual indicator		N/A
8.5.4.2.3	Emergency stop system	No such equipment present	N/A
	Maximum stopping distance from the point of activation (m).....		N/A
	Space between end point and nearest fixed mechanical part (mm).....		N/A
8.5.4.2.4	Endurance requirements	No such equipment present	N/A
	Mechanical system subjected to 100 000 cycles of operation		N/A
	- Mechanical function check and visual inspection		N/A
	- Cable assembly		N/A
8.5.4.3	Equipment having electromechanical device for destruction of media	No such equipment present	N/A
8.5.4.3.1	Equipment safeguards		N/A
8.5.4.3.2	Instructional safeguards against moving parts		N/A
8.5.4.3.3	Disconnection from the supply		N/A
8.5.4.3.4	Cut type and test force (N).....		N/A
8.5.4.3.5	Compliance		N/A
8.5.5	High pressure lamps	No such equipment present	N/A
	Explosion test.....		N/A
8.5.5.3	Glass particles dimensions (mm).....		N/A
8.6	Stability of equipment		N/A
8.6.1	General	MS1 only	N/A
	Instructional safeguard	MS1 only	N/A
8.6.2	Static stability		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
8.6.2.2	Static stability test	MS1 only	N/A
8.6.2.3	Downward force test		N/A
8.6.3	Relocation stability		N/A
	Wheels diameter (mm)	MS1 only	—
	Tilt test		N/A
8.6.4	Glass slide test		N/A
8.6.5	Horizontal force test		N/A
8.7	Equipment mounted to wall, ceiling or other structure		N/A
8.7.1	Mount means type	No such mounting present	N/A
8.7.2	Test methods		N/A
	Test 1, additional downwards force (N).....		N/A
	Test 2, number of attachment points and test force (N).....		N/A
	Test 3 Nominal diameter (mm) and applied torque (Nm).....		N/A
8.8	Handles strength		N/A
8.8.1	General	None present	N/A
8.8.2	Handle strength test		N/A
	Number of handles.....		—
	Force applied (N)		—
8.9	Wheels or casters attachment requirements		N/A
8.9.2	Pull test	None present	N/A
8.10	Carts, stands and similar carriers		N/A
8.10.1	General	None present	N/A
8.10.2	Marking and instructions		N/A
8.10.3	Cart, stand or carrier loading test		N/A
	Loading force applied (N)		N/A
8.10.4	Cart, stand or carrier impact test		N/A
8.10.5	Mechanical stability		N/A
	Force applied (N)		—
8.10.6	Thermoplastic temperature stability		N/A
8.11	Mounting means for slide-rail mounted equipment (SRME)		N/A
8.11.1	General	Not rack mounted	N/A
8.11.2	Requirements for slide rails		N/A
	Instructional Safeguard		N/A
8.11.3	Mechanical strength test		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
8.11.3.1	Downward force test, force (N) applied.....:		N/A
8.11.3.2	Lateral push force test		N/A
8.11.3.3	Integrity of slide rail end stops		N/A
8.11.4	Compliance		N/A
8.12	Telescoping or rod antennas		N/A
	Button/ball diameter (mm)	None present	—

9	THERMAL BURN INJURY		P
9.2	Thermal energy source classifications		P
9.3	Touch temperature limits		P
9.3.1	Touch temperatures of accessible parts	See appended table 5.4.1.4	P
9.3.2	Test method and compliance	See appended table 5.4.1.4	P
9.4	Safeguards against thermal energy sources		P
9.5	Requirements for safeguards		N/A
9.5.1	Equipment safeguard		N/A
9.5.2	Instructional safeguard	TS1 only	N/A
9.6	Requirements for wireless power transmitters		N/A
9.6.1	General	No such equipment present	N/A
9.6.2	Specification of the foreign objects		N/A
9.6.3	Test method and compliance	(See appended table 9.6)	N/A

10	RADIATION		N/A
10.2	Radiation energy source classification		N/A
10.2.1	General classification	No radiation energy sources	N/A
	Lasers	None present	—
	Lamps and lamp systems.....	None present	—
	Image projectors.....	None present	—
	X-Ray.....	None present	—
	Personal music player	None present	—
10.3	Safeguards against laser radiation		N/A
	The standard(s) equipment containing laser(s) comply	No lasers present	N/A
10.4	Safeguards against optical radiation from lamps and lamp systems (including LED types)		N/A
10.4.1	General requirements	No optical radiation sources present	N/A
	Instructional safeguard provided for accessible		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	radiation level needs to exceed		
	Risk group marking and location		N/A
	Information for safe operation and installation		N/A
10.4.2	Requirements for enclosures		N/A
	UV radiation exposure	(See Annex C)	N/A
10.4.3	Instructional safeguard		N/A
10.5	Safeguards against X-radiation		N/A
10.5.1	Requirements	No x-radiation present	N/A
	Instructional safeguard for skilled persons	None present	—
10.5.3	Maximum radiation (pA/kg).....	None present (See appended tables B.3 & B.4)	—
10.6	Safeguards against acoustic energy sources		N/A
10.6.1	General	Not a personal music player	N/A
10.6.2	Classification	Not a personal music player	N/A
	Acoustic output $L_{Aeq,T}$, dB(A).....	No such outputs	N/A
	Unweighted RMS output voltage (mV).....		N/A
	Digital output signal (dBFS).....		N/A
10.6.3	Requirements for dose-based systems	No such dosed-based systems present	N/A
10.6.3.1	General requirements		N/A
10.6.3.2	Dose-based warning and automatic decrease		N/A
10.6.3.3	Exposure-based warning and requirements		N/A
	30 s integrated exposure level (MEL30)		N/A
	Warning for MEL \geq 100 dB(A)		N/A
10.6.4	Measurement methods		N/A
10.6.5	Protection of persons		N/A
	Instructional safeguards		N/A
10.6.6	Requirements for listening devices (headphones, earphones, etc.)		N/A
10.6.6.1	Corded listening devices with analogue input	No such listening devices present	N/A
	Listening device input voltage (mV)		N/A
10.6.6.2	Corded listening devices with digital input	No such listening devices present	N/A
	Max. acoustic output $L_{Aeq,T}$, dB(A).....		N/A
10.6.6.3	Cordless listening devices	No such listening devices present	N/A
	Max. acoustic output $L_{Aeq,T}$, dB(A).....		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

B	NORMAL OPERATING CONDITION TESTS, ABNORMAL OPERATING CONDITION TESTS AND SINGLE FAULT CONDITION TESTS		P
B.1	General		P
B.1.5	Temperature measurement conditions	See appended table 5.4.1.4	P
B.2	Normal operating conditions		P
B.2.1	General requirements..... :	See Test Item Particulars and appended test tables	P
	Audio Amplifiers and equipment with audio amplifiers	None present	N/A
B.2.3	Supply voltage and tolerances	3 - 3.6 VDC with no tolerances	P
B.2.5	Input test..... :	See appended table B.2.5	P
B.3	Simulated abnormal operating conditions		N/A
B.3.1	General	End product evaluation	N/A
B.3.2	Covering of ventilation openings	End product evaluation	N/A
	Instructional safeguard	None present	N/A
B.3.3	DC mains polarity test	No DC mains present	N/A
B.3.4	Setting of voltage selector	No such selector present	N/A
B.3.5	Maximum load at output terminals	No such outputs present	N/A
B.3.6	Reverse battery polarity	No batteries present	N/A
B.3.7	Audio amplifier abnormal operating conditions	No audio amplifier present	N/A
B.3.8	Safeguards functional during and after abnormal operating conditions		N/A
B.4	Simulated single fault conditions		P
B.4.1	General		P
B.4.2	Temperature controlling device	No such devices present	N/A
B.4.3	Blocked motor test	No motors present	N/A
B.4.4	Functional insulation	ES1 and PS1 circuits only	N/A
B.4.4.1	Short circuit of clearances for functional insulation		N/A
B.4.4.2	Short circuit of creepage distances for functional insulation		N/A
B.4.4.3	Short circuit of functional insulation on coated printed boards		N/A
B.4.5	Short-circuit and interruption of electrodes in tubes and semiconductors	No such components	N/A
B.4.6	Short circuit or disconnection of passive components	No such components	N/A
B.4.7	Continuous operation of components	No such components	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
B.4.8	Compliance during and after single fault conditions :	None present (See appended table B.4)	N/A
B.4.9	Battery charging and discharging under single fault conditions	None present (See Annex M)	N/A
C	UV RADIATION		N/A
C.1	Protection of materials in equipment from UV radiation		N/A
C.1.2	Requirements	None present	N/A
C.1.3	Test method		N/A
C.2	UV light conditioning test		N/A
C.2.1	Test apparatus..... :		N/A
C.2.2	Mounting of test samples		N/A
C.2.3	Carbon-arc light-exposure test		N/A
C.2.4	Xenon-arc light-exposure test		N/A
D	TEST GENERATORS		N/A
D.1	Impulse test generators		N/A
D.2	Antenna interface test generator		N/A
D.3	Electronic pulse generator		N/A
E	TEST CONDITIONS FOR EQUIPMENT CONTAINING AUDIO AMPLIFIERS		N/A
E.1	Electrical energy source classification for audio signals		N/A
	Maximum non-clipped output power (W)..... :	None	—
	Rated load impedance (Ω) :	None	—
	Open-circuit output voltage (V)..... :	None	—
	Instructional safeguard :	None	—
E.2	Audio amplifier normal operating conditions		N/A
	Audio signal source type :	None	—
	Audio output power (W)..... :	None	—
	Audio output voltage (V)..... :	None	—
	Rated load impedance (Ω) :	None	—
	Requirements for temperature measurement	None (See Table B.1.5)	N/A
E.3	Audio amplifier abnormal operating conditions	None (See Table B.3)	N/A
F	EQUIPMENT MARKINGS, INSTRUCTIONS, AND INSTRUCTIONAL SAFEGUARDS		P
F.1	General		P
	Language :	English only reviewed	—
F.2	Letter symbols and graphical symbols		P
F.2.1	Letter symbols according to IEC60027-1		P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
F.2.2	Graphic symbols according to IEC, ISO or manufacturer specific		P
F.3	Equipment markings		P
F.3.1	Equipment marking locations	On the top metal enclosure of cellular module	P
F.3.2	Equipment identification markings		P
F.3.2.1	Manufacturer identification	Blues Inc.	P
F.3.2.2	Model identification	WWXDW, NBGLW, NBNAW, WBEXW, and WBNAW	P
F.3.3	Equipment rating markings	Not required	N/A
F.3.3.1	Equipment with direct connection to mains	No connection to mains	N/A
F.3.3.2	Equipment without direct connection to mains	Not required	N/A
F.3.3.3	Nature of the supply voltage.....	None	N/A
F.3.3.4	Rated voltage	None	N/A
F.3.3.5	Rated frequency	None	N/A
F.3.3.6	Rated current or rated power.....	None	N/A
F.3.3.7	Equipment with multiple supply connections	Single supply connection	N/A
F.3.4	Voltage setting device	None present	N/A
F.3.5	Terminals and operating devices	None present	N/A
F.3.5.1	Mains appliance outlet and socket-outlet markings	No such outlets	N/A
F.3.5.2	Switch position identification marking.....	No switches	N/A
F.3.5.3	Replacement fuse identification and rating markings	No replaceable fuses present	N/A
	Instructional safeguards for neutral fuse		N/A
F.3.5.4	Replacement battery identification marking	No batteries present	N/A
F.3.5.5	Neutral conductor terminal		N/A
F.3.5.6	Terminal marking location		N/A
F.3.6	Equipment markings related to equipment classification		N/A
F.3.6.1	Class I equipment	Not a class I	N/A
F.3.6.1.1	Protective earthing conductor terminal.....	None	N/A
F.3.6.1.2	Protective bonding conductor terminals	None	N/A
F.3.6.2	Equipment class marking	No such equipment	N/A
F.3.6.3	Functional earthing terminal marking	No functional earth	N/A
F.3.7	Equipment IP rating marking	IP00	N/A
F.3.8	External power supply output marking	No such supply	N/A
F.3.9	Durability, legibility and permanence of marking		P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
F.3.10	Test for permanence of markings	15s with a piece of cloth soaked with water and 15s with 85% n-hexane petroleum spirit	P
F.4	Instructions		P
	Information prior to installation and initial use	Provided in Manual/Technical datasheet	P
	Equipment for use in locations where children not likely to be present	The evaluation to be determined as part of the end-product.	N/A
	Instructions for installation and interconnection	Provided in Manual/Technical datasheet	P
	Equipment intended for use only in restricted access area	Built-in module	N/A
	Equipment intended to be fastened in place	Built-in module	N/A
	Instructions for audio equipment terminals	No audio terminals present	N/A
	Protective earthing used as a safeguard	No protective earthing	N/A
	Protective conductor current exceeding ES2 limits	None present	N/A
	Graphic symbols used on equipment	No instructional safeguards	N/A
	Permanently connected equipment not provided with all-pole mains switch	None present	N/A
	Replaceable components or modules providing safeguard function	None present	N/A
	Equipment containing insulating liquid	None present	N/A
	Installation instructions for outdoor equipment	Built-in module	N/A
F.5	Instructional safeguards		N/A
G	COMPONENTS		N/A
G.1	Switches		N/A
G.1.1	General	No mains switches present	N/A
G.1.2	Ratings, endurance, spacing, maximum load		N/A
G.1.3	Test method and compliance		N/A
G.2	Relays		N/A
G.2.1	Requirements	None employed	N/A
G.2.2	Overload test		N/A
G.2.3	Relay controlling connectors supplying power to other equipment		N/A
G.2.4	Test method and compliance		N/A
G.3	Protective devices		N/A
G.3.1	Thermal cut-offs	None employed	N/A
	Thermal cut-outs separately approved according to IEC 60730 with conditions indicated in a) & b)		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Thermal cut-outs tested as part of the equipment as indicated in c)		N/A
G.3.1.2	Test method and compliance		N/A
G.3.2	Thermal links		N/A
G.3.2.1	a) Thermal links tested separately according to IEC 60691 with specifics		N/A
	b) Thermal links tested as part of the equipment		N/A
G.3.2.2	Test method and compliance		N/A
G.3.3	PTC thermistors		N/A
G.3.4	Overcurrent protection devices		N/A
G.3.5	Safeguards components not mentioned in G.3.1 to G.3.4		N/A
G.3.5.1	Non-resettable devices suitably rated and marking provided		N/A
G.3.5.2	Single faults conditions..... :	(See appended table B.4)	N/A
G.4	Connectors		N/A
G.4.1	Spacings	No mains connectors present	N/A
G.4.2	Mains connector configuration		N/A
G.4.3	Plug is shaped that insertion into mains socket-outlets or appliance coupler is unlikely		N/A
G.5	Wound components		N/A
G.5.1	Wire insulation in wound components	No wound components present	N/A
G.5.1.2	Protection against mechanical stress		N/A
G.5.2	Endurance test		N/A
G.5.2.1	General test requirements		N/A
G.5.2.2	Heat run test		N/A
	Test time (days per cycle)	None	—
	Test temperature (°C)..... :	None	—
G.5.2.3	Wound components supplied from the mains		N/A
G.5.2.4	No insulation breakdown		N/A
G.5.3	Transformers	No transformers present	N/A
G.5.3.1	Compliance method..... :		N/A
	Position		N/A
	Method of protection		N/A
G.5.3.2	Insulation		N/A
	Protection from displacement of windings..... :	None	—
G.5.3.3	Transformer overload tests		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.5.3.3.1	Test conditions		N/A
G.5.3.3.2	Winding temperatures		N/A
G.5.3.3.3	Winding temperatures - alternative test method		N/A
G.5.3.4	Transformers using FIW		N/A
G.5.3.4.1	General		N/A
	FIW wire nominal diameter..... :	None	—
G.5.3.4.2	Transformers with basic insulation only		N/A
G.5.3.4.3	Transformers with double insulation or reinforced insulation..... :		N/A
G.5.3.4.4	Transformers with FIW wound on metal or ferrite core		N/A
G.5.3.4.5	Thermal cycling test and compliance		N/A
G.5.3.4.6	Partial discharge test		N/A
G.5.3.4.7	Routine test		N/A
G.5.4	Motors	No motors present	N/A
G.5.4.1	General requirements		N/A
G.5.4.2	Motor overload test conditions		N/A
G.5.4.3	Running overload test		N/A
G.5.4.4.2	Locked-rotor overload test		N/A
	Test duration (days) :	None	—
G.5.4.5	Running overload test for DC motors		N/A
G.5.4.5.2	Tested in the unit		N/A
G.5.4.5.3	Alternative method		N/A
G.5.4.6	Locked-rotor overload test for DC motors		N/A
G.5.4.6.2	Tested in the unit		N/A
	Maximum Temperature :		N/A
G.5.4.6.3	Alternative method		N/A
G.5.4.7	Motors with capacitors		N/A
G.5.4.8	Three-phase motors		N/A
G.5.4.9	Series motors		N/A
	Operating voltage :	None	—
G.6	Wire Insulation		N/A
G.6.1	General	None present	N/A
G.6.2	Enamelled winding wire insulation		N/A
G.7	Mains supply cords		N/A
G.7.1	General requirements	None present	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Type..... :	None	—
G.7.2	Cross sectional area (mm ² or AWG)..... :		N/A
G.7.3	Cord anchorages and strain relief for non-detachable power supply cords		N/A
G.7.3.2	Cord strain relief		N/A
G.7.3.2.1	Requirements		N/A
	Strain relief test force (N)..... :		N/A
G.7.3.2.2	Strain relief mechanism failure		N/A
G.7.3.2.3	Cord sheath or jacket position, distance (mm)..... :		N/A
G.7.3.2.4	Strain relief and cord anchorage material		N/A
G.7.4	Cord Entry		N/A
G.7.5	Non-detachable cord bend protection		N/A
G.7.5.1	Requirements		N/A
G.7.5.2	Test method and compliance		N/A
	Overall diameter or minor overall dimension, <i>D</i> (mm)..... :	None	—
	Radius of curvature after test (mm)..... :	None	—
G.7.6	Supply wiring space		N/A
G.7.6.1	General requirements		N/A
G.7.6.2	Stranded wire		N/A
G.7.6.2.1	Requirements		N/A
G.7.6.2.2	Test with 8 mm strand		N/A
G.8	Varistors		N/A
G.8.1	General requirements	None employed	N/A
G.8.2	Safeguards against fire		N/A
G.8.2.1	General		N/A
G.8.2.2	Varistor overload test		n/A
G.8.2.3	Temporary overvoltage test		N/A
G.9	Integrated circuit (IC) current limiters		N/A
G.9.1	Requirements	None employed	N/A
	IC limiter output current (max. 5A)..... :	None	—
	Manufacturers' defined drift..... :	None	—
G.9.2	Test Program		N/A
G.9.3	Compliance		N/A
G.10	Resistors		N/A
G.10.1	General	None employed	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.10.2	Conditioning		N/A
G.10.3	Resistor test		N/A
G.10.4	Voltage surge test		N/A
G.10.5	Impulse test		N/A
G.10.6	Overload test		N/A
G.11	Capacitors and RC units		N/A
G.11.1	General requirements	None employed	N/A
G.11.2	Conditioning of capacitors and RC units		N/A
G.11.3	Rules for selecting capacitors		N/A
G.12	Optocouplers		N/A
	Optocouplers comply with IEC 60747-5-5 with specifics	None employed	N/A
	Type test voltage $V_{ini,a}$	None	—
	Routine test voltage, $V_{ini,b}$	None	—
G.13	Printed boards		P
G.13.1	General requirements	Recognized PCB used	P
G.13.2	Uncoated printed boards		P
G.13.3	Coated printed boards		N/A
G.13.4	Insulation between conductors on the same inner surface		N/A
G.13.5	Insulation between conductors on different surfaces		N/A
	Distance through insulation		N/A
	Number of insulation layers (pcs)	None	—
G.13.6	Tests on coated printed boards		N/A
G.13.6.1	Sample preparation and preliminary inspection		N/A
G.13.6.2	Test method and compliance		N/A
G.14	Coating on components terminals		N/A
G.14.1	Requirements	(See Clause G.13)	N/A
G.15	Pressurized liquid filled components		N/A
G.15.1	Requirements	None employed	N/A
G.15.2	Test methods and compliance		N/A
G.15.2.1	Hydrostatic pressure test		N/A
G.15.2.2	Creep resistance test		N/A
G.15.2.3	Tubing and fittings compatibility test		N/A
G.15.2.4	Vibration test		N/A
G.15.2.5	Thermal cycling test		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.15.2.6	Force test		N/A
G.15.3	Compliance		N/A
G.16	IC including capacitor discharge function (ICX)		N/A
G.16.1	Condition for fault tested is not required	No such components	N/A
	ICX with associated circuitry tested in equipment		N/A
	ICX tested separately		N/A
G.16.2	Tests		N/A
	Smallest capacitance and smallest resistance specified by ICX manufacturer for impulse test..... :	None	—
	Mains voltage that impulses to be superimposed on :	none	—
	Largest capacitance and smallest resistance for ICX tested by itself for 10000 cycles test :	None	—
G.16.3	Capacitor discharge test..... :		N/A
H	CRITERIA FOR TELEPHONE RINGING SIGNALS		N/A
H.1	General		N/A
H.2	Method A		N/A
H.3	Method B		N/A
H.3.1	Ringling signal	No telephone ringing signals present	N/A
H.3.1.1	Frequency (Hz) :	None	—
H.3.1.2	Voltage (V) :	None	—
H.3.1.3	Cadence; time (s) and voltage (V) :	None	—
H.3.1.4	Single fault current (mA):..... :	None	—
H.3.2	Tripping device and monitoring voltage		N/A
H.3.2.1	Conditions for use of a tripping device or a monitoring voltage		N/A
H.3.2.2	Tripping device		N/A
H.3.2.3	Monitoring voltage (V) :		N/A
J	INSULATED WINDING WIRES FOR USE WITHOUT INTERLEAVED INSULATION		N/A
J.1	General		N/A
	Winding wire insulation..... :	None	—
	Solid round winding wire, diameter (mm)..... :	None present	N/A
	Solid square and rectangular (flatwise bending) winding wire, cross-sectional area (mm ²)..... :	None present	N/A
J.2/J.3	Tests and Manufacturing	(See separate test report)	—
K	SAFETY INTERLOCKS		N/A
K.1	General requirements		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Instructional safeguard	None employed	N/A
K.2	Components of safety interlock safeguard mechanism		N/A
K.3	Inadvertent change of operating mode		N/A
K.4	Interlock safeguard override		N/A
K.5	Fail-safe		N/A
K.5.1	Under single fault condition		N/A
K.6	Mechanically operated safety interlocks		N/A
K.6.1	Endurance requirement		N/A
K.6.2	Test method and compliance		N/A
K.7	Interlock circuit isolation		N/A
K.7.1	Separation distance for contact gaps & interlock circuit elements		N/A
	In circuit connected to mains, separation distance for contact gaps (mm).....		N/A
	In circuit isolated from mains, separation distance for contact gaps (mm).....		N/A
	Electric strength test before and after the test of K.7.2	(See appended table 5.4.9)	N/A
K.7.2	Overload test, Current (A)		N/A
K.7.3	Endurance test		N/A
K.7.4	Electric strength test		N/A
L	DISCONNECT DEVICES		N/A
L.1	General requirements	No disconnect device	N/A
L.2	Permanently connected equipment		N/A
L.3	Parts that remain energized		N/A
L.4	Single-phase equipment		N/A
L.5	Three-phase equipment		N/A
L.6	Switches as disconnect devices		N/A
L.7	Plugs as disconnect devices		N/A
L.8	Multiple power sources		N/A
	Instructional safeguard		N/A
M	EQUIPMENT CONTAINING BATTERIES AND THEIR PROTECTION CIRCUITS		N/A
M.1	General requirements		N/A
M.2	Safety of batteries and their cells		N/A
M.2.1	Batteries and their cells comply with relevant IEC standards	No batteries present	N/A
M.3	Protection circuits for batteries provided within the equipment		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
M.3.1	Requirements		N/A
M.3.2	Test method		N/A
	Overcharging of a rechargeable battery		N/A
	Excessive discharging		N/A
	Unintentional charging of a non-rechargeable battery		N/A
	Reverse charging of a rechargeable battery		N/A
M.3.3	Compliance	(See appended table M.3)	N/A
M.4	Additional safeguards for equipment containing a portable secondary lithium battery		N/A
M.4.1	General	No batteries present	N/A
M.4.2	Charging safeguards		N/A
M.4.2.1	Requirements		N/A
M.4.2.2	Compliance..... :	(See appended table M.4.2)	N/A
M.4.3	Fire enclosure..... :		N/A
M.4.4	Drop test of equipment containing a secondary lithium battery		N/A
M.4.4.2	Preparation and procedure for the drop test		N/A
M.4.4.3	Drop, Voltage on reference and dropped batteries (V); voltage difference during 24 h period (%):		N/A
M.4.4.4	Check of the charge/discharge function		N/A
M.4.4.5	Charge / discharge cycle test		N/A
M.4.4.6	Compliance		N/A
M.5	Risk of burn due to short-circuit during carrying		N/A
M.5.1	Requirement	No batteries present	N/A
M.5.2	Test method and compliance		N/A
M.6	Safeguards against short-circuits		N/A
M.6.1	External and internal faults	No batteries present	N/A
M.6.2	Compliance		N/A
M.7	Risk of explosion from lead acid and NiCd batteries		N/A
M.7.1	Ventilation preventing explosive gas concentration	No batteries present	N/A
	Calculated hydrogen generation rate		N/A
M.7.2	Test method and compliance		N/A
	Minimum air flow rate, Q (m ³ /h)..... :		N/A
M.7.3	Ventilation tests		N/A
M.7.3.1	General		N/A
M.7.3.2	Ventilation test – alternative 1		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Hydrogen gas concentration (%)..... :		N/A
M.7.3.3	Ventilation test – alternative 2		N/A
	Obtained hydrogen generation rate..... :		N/A
M.7.3.4	Ventilation test – alternative 3		N/A
	Hydrogen gas concentration (%)..... :		N/A
M.7.4	Marking..... :		N/A
M.8	Protection against internal ignition from external spark sources of batteries with aqueous electrolyte		N/A
M.8.1	General	No batteries present	N/A
M.8.2	Test method		N/A
M.8.2.1	General		N/A
M.8.2.2	Estimation of hypothetical volume V_z (m ³ /s)..... :	None	—
M.8.2.3	Correction factors..... :	None	—
M.8.2.4	Calculation of distance d (mm)..... :	None	—
M.9	Preventing electrolyte spillage		N/A
M.9.1	Protection from electrolyte spillage	No batteries present	N/A
M.9.2	Tray for preventing electrolyte spillage		N/A
M.10	Instructions to prevent reasonably foreseeable misuse	No batteries present	N/A
	Instructional safeguard..... :		N/A
N	ELECTROCHEMICAL POTENTIALS		P
	Material(s) used..... :	Pollution degree considered	—
O	MEASUREMENT OF CREEPAGE DISTANCES AND CLEARANCES		N/A
	Value of X (mm)..... :	Functional only	—
P	SAFEGUARDS AGAINST CONDUCTIVE OBJECTS		N/A
P.1	General	No openings	N/A
P.2	Safeguards against entry or consequences of entry of a foreign object		N/A
P.2.1	General	No openings	n/A
P.2.2	Safeguards against entry of a foreign object		N/A
	Location and Dimensions (mm)..... :	None	—
P.2.3	Safeguards against the consequences of entry of a foreign object		N/A
P.2.3.1	Safeguard requirements	No bare parts of ES3 or PS3	N/A
	The ES3 and PS3 keep-out volume in Figure P.3 not applicable to transportable equipment		N/A
	Transportable equipment with metalized plastic parts..... :		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
P.2.3.2	Consequence of entry test..... :		N/A
P.3	Safeguards against spillage of internal liquids		N/A
P.3.1	General	No internal liquids	N/A
P.3.2	Determination of spillage consequences		N/A
P.3.3	Spillage safeguards		N/A
P.3.4	Compliance		N/A
P.4	Metallized coatings and adhesives securing parts		N/A
P.4.1	General	None present	N/A
P.4.2	Tests		N/A
	Conditioning, T _c (°C)	None	—
	Duration (weeks)	None	—
Q	CIRCUITS INTENDED FOR INTERCONNECTION WITH BUILDING WIRING		N/A
Q.1	Limited power sources	None present	N/A
Q.1.1	Requirements		N/A
	a) Inherently limited output		N/A
	b) Impedance limited output		N/A
	c) Regulating network limited output		N/A
	d) Overcurrent protective device limited output		N/A
	e) IC current limiter complying with G.9		N/A
Q.1.2	Test method and compliance	(See appended table Q.1)	N/A
	Current rating of overcurrent protective device (A)		N/A
Q.2	Test for external circuits – paired conductor cable	None present	N/A
	Maximum output current (A)		N/A
	Current limiting method	None	—
R	LIMITED SHORT CIRCUIT TEST		N/A
R.1	General	No mains connections	N/A
R.2	Test setup		N/A
	Overcurrent protective device for test	None	—
R.3	Test method		N/A
	Cord/cable used for test	NONE	—
R.4	Compliance		N/A
S	TESTS FOR RESISTANCE TO HEAT AND FIRE		N/A
S.1	Flammability test for fire enclosures and fire barrier materials of equipment where the steady state power does not exceed 4 000 W		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Samples, material..... :	No fire enclosure required	—
	Wall thickness (mm)..... :	None	—
	Conditioning (°C)..... :	None	—
	Test flame according to IEC 60695-11-5 with conditions as set out		N/A
	- Material not consumed completely		N/A
	- Material extinguishes within 30s		N/A
	- No burning of layer or wrapping tissue		N/A
S.2	Flammability test for fire enclosure and fire barrier integrity		N/A
	Samples, material..... :	None	—
	Wall thickness (mm)..... :	None	—
	Conditioning (°C)..... :	None	—
S.3	Flammability test for the bottom of a fire enclosure		N/A
S.3.1	Mounting of samples		N/A
S.3.2	Test method and compliance		N/A
	Mounting of samples..... :	None	—
	Wall thickness (mm)..... :	None	—
S.4	Flammability classification of materials		N/A
S.5	Flammability test for fire enclosure materials of equipment with a steady state power exceeding 4 000 W		N/A
	Samples, material..... :	None	—
	Wall thickness (mm)..... :	None	—
	Conditioning (°C)..... :	None	—
T	MECHANICAL STRENGTH TESTS		N/A
T.1	General		N/A
T.2	Steady force test, 10 N..... :	(See appended table T.2)	N/A
T.3	Steady force test, 30 N..... :	(See appended table T.3)	N/A
T.4	Steady force test, 100 N..... :	(See appended table T.4)	N/A
T.5	Steady force test, 250 N..... :	(See appended table T.5)	N/A
T.6	Enclosure impact test	(See appended table T.6)	N/A
	Fall test		N/A
	Swing test		N/A
T.7	Drop test..... :	(See appended table T.7)	N/A
T.8	Stress relief test..... :	(See appended table T.8)	N/A
T.9	Glass Impact Test..... :	(See appended table T.9)	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
T.10	Glass fragmentation test		N/A
	Number of particles counted.....:	No such glasses	N/A
T.11	Test for telescoping or rod antennas		N/A
	Torque value (Nm)	No such antennas	N/A
U	MECHANICAL STRENGTH OF CATHODE RAY TUBES (CRT) AND PROTECTION AGAINST THE EFFECTS OF IMPLOSION		N/A
U.1	General		N/A
	Instructional safeguard :	No CRTs present	N/A
U.2	Test method and compliance for non-intrinsically protected CRTs		N/A
U.3	Protective screen		N/A
V	DETERMINATION OF ACCESSIBLE PARTS		N/A
V.1	Accessible parts of equipment		N/A
V.1.1	General	Built-in module has no ES2/ES3 parts	N/A
V.1.2	Surfaces and openings tested with jointed test probes		N/A
V.1.3	Openings tested with straight unjointed test probes		N/A
V.1.4	Plugs, jacks, connectors tested with blunt probe		N/A
V.1.5	Slot openings tested with wedge probe		N/A
V.1.6	Terminals tested with rigid test wire		N/A
V.2	Accessible part criterion		N/A
X	ALTERNATIVE METHOD FOR DETERMINING CLEARANCES FOR INSULATION IN CIRCUITS CONNECTED TO AN AC MAINS NOT EXCEEDING 420 V PEAK (300 V RMS)		N/A
	Clearance	No ac mains (See appended table X)	N/A
Y	CONSTRUCTION REQUIREMENTS FOR OUTDOOR ENCLOSURES		N/A
Y.1	General	Built-in module	N/A
Y.2	Resistance to UV radiation		N/A
Y.3	Resistance to corrosion		N/A
Y.3	Resistance to corrosion		N/A
Y.3.1	Metallic parts of outdoor enclosures are resistant to effects of water-borne contaminants by		N/A
Y.3.2	Test apparatus		N/A
Y.3.3	Water – saturated sulphur dioxide atmosphere		N/A
Y.3.4	Test procedure		N/A
Y.3.5	Compliance		N/A
Y.4	Gaskets		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
Y.4.1	General		N/A
Y.4.2	Gasket tests		N/A
Y.4.3	Tensile strength and elongation tests		N/A
	Alternative test methods :		N/A
Y.4.4	Compression test		N/A
Y.4.5	Oil resistance		N/A
Y.4.6	Securing means	(See Annex P.4)	N/A
Y.5	Protection of equipment within an outdoor enclosure		N/A
Y.5.1	General		N/A
Y.5.2	Protection from moisture		N/A
	Relevant tests of IEC 60529 or Y.5.3 :		N/A
Y.5.3	Water spray test		N/A
Y.5.4	Protection from plants and vermin		N/A
Y.5.5	Protection from excessive dust		N/A
Y.5.5.1	General		N/A
Y.5.5.2	IP5X equipment		N/A
Y.5.5.3	IP6X equipment		N/A
Y.6	Mechanical strength of enclosures		N/A
Y.6.1	General		N/A
Y.6.2	Impact test :	(See Table T.6)	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.2	TABLE: Classification of electrical energy sources						P
Supply Voltage	Location (e.g. circuit designation)	Test conditions	Parameters				ES Class
			U (V)	I (mA)	Type ¹⁾	Additional Info ²⁾	
5Vdc	All circuits on module	Normal/Abnormal/Single Fault	5Vdc	0.0	SS	None	ES1 (declared)
Supplementary information:							
1) Type: Steady state (SS), Capacitance (CP), Single pulse (SP), Repetitive pulses (RP), etc.							
2) Additional Info: Frequency, Pulse duration, Pulse off time, Capacitance value, etc.							

5.4.1.8	TABLE: Working voltage measurement				N/A
Location	RMS voltage (V)	Peak voltage (V)	Frequency (Hz)	Comments	
Supplementary information:					

5.4.1.10.2	TABLE: Vicat softening temperature of thermoplastics			N/A
Method.....:			ISO 306 / B50	—
Object/ Part No./Material	Manufacturer/trademark	Thickness (mm)	T softening (°C)	
Supplementary information:				

5.4.1.10.3	TABLE: Ball pressure test of thermoplastics				N/A
Allowed impression diameter (mm).....:				≤ 2 mm	—
Object/Part No./Material	Manufacturer/trademark	Thickness (mm)	Test temperature (°C)	Impression diameter (mm)	
Supplementary information:					

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.4.2, 5.4.3	TABLE: Minimum Clearances/Creepage distance							N/A
Clearance (cl) and creepage distance (cr) at/of/between:	U_p (V)	U_{rms} (V)	Freq ¹⁾ (Hz)	Required cl (mm)	cl (mm)	E.S. ²⁾ (V)	Required cr (mm)	cr (mm)
Supplementary information:								
1) Only for frequency above 30 kHz								
2) Complete Electric Strength voltage (E.S. (V) when 5.4.2.4 applied)								

5.4.4.2	TABLE: Minimum distance through insulation				N/A
Distance through insulation (DTI) at/of	Peak voltage (V)	Insulation	Required DTI (mm)	Measured DTI (mm)	
Supplementary information:					

5.4.4.9	TABLE: Solid insulation at frequencies >30 kHz					N/A
Insulation material	E_p	Frequency (kHz)	K_R	Thickness d (mm)	Insulation	V_{pw} (Vpk)
Supplementary information:						

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.4.9	TABLE: Electric strength tests			N/A
Test voltage applied between:	Voltage shape (Surge, Impulse, AC, DC, etc.)	Test voltage (V)	Breakdown Yes / No	
Supplementary information:				

5.5.2.2	TABLE: Stored discharge on capacitors					N/A
Location	Supply voltage (V)	Operating and fault condition ¹⁾	Switch position	Measured voltage (Vpk)	ES Class	
Supplementary information:						
X-capacitors installed for testing:						
[] bleeding resistor rating:						
[] ICX:						
1) Normal operating condition (e.g., normal operation, or open fuse), SC= short circuit, OC= open circuit.						

5.6.6	TABLE: Resistance of protective conductors and terminations				N/A
Location	Test current (A)	Duration (min)	Voltage drop (V)	Resistance (Ω)	
Supplementary information:					

5.7.4	TABLE: Unearthed accessible parts					N/A
Location	Operating and fault conditions	Supply Voltage (V)	Parameters			ES class
			Voltage (V_{rms} or V_{pk})	Current (A_{rms} or A_{pk})	Freq. (Hz)	

IEC 62368-1						
Clause	Requirement + Test			Result - Remark		Verdict
Supplementary information:						
Abbreviation: SC= short circuit; OC= open circuit						

5.7.5	TABLE: Earthed accessible conductive part				N/A
Supply voltage (V)					—
Phase(s)	[] Single Phase; [] Three Phase: [] Delta [] Wye				
Power Distribution System	[] TN [] TT [] IT				
Location	Fault Condition No in IEC 60990 clause 6.2.2	Touch current (mA)	Comment		
Supplementary Information:					

5.8	TABLE: Backfeed safeguard in battery backed up supplies					N/A
Location	Supply voltage (V)	Operating and fault condition	Time (s)	Open-circuit voltage (V)	Touch current (A)	ES Class
Supplementary information:						
Abbreviation: SC= short circuit, OC= open circuit						

6.2.2	TABLE: Power source circuit classifications					P
Location	Operating and fault condition	Voltage (V)	Current (A)	Max. Power ¹⁾ (W)	Time (S)	PS class
Entire circuit	Normal and maximum load	5Vdc	2	10	5	PS1 (declared)
Supplementary information:						
Abbreviation: SC= short circuit; OC= open circuit						

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
1) Measured after 3 s for PS1 and measured after 5 s for PS2 and PS3.			

6.2.3.1	TABLE: Determination of Arcing PIS				N/A
Location	Open circuit voltage after 3 s (Vpk)	Measured r.m.s current (A)	Calculated value	Arcing PIS? Yes / No	
Supplementary information:					

6.2.3.2	TABLE: Determination of resistive PIS			N/A
Location	Operating and fault condition	Dissipate power (W)	Arcing PIS? Yes / No	
Supplementary information:				
Abbreviation: SC= short circuit; OC= open circuit				

8.5.5	TABLE: High pressure lamp				N/A
Lamp manufacturer	Lamp type	Explosion method	Longest axis of glass particle (mm)	Particle found beyond 1 m Yes / No	
Supplementary information:					

IEC 62368-1									
Clause	Requirement + Test						Result - Remark	Verdict	
9.6	TABLE: Temperature measurements for wireless power transmitters							N/A	
Supply voltage (V)..... :							—		
Max. transmit power of transmitter (W)..... :							—		
Foreign objects	w/o receiver and direct contact		with receiver and direct contact		with receiver and at distance of 2 mm		with receiver and at distance of 5 mm		
	Object (°C)	Ambient (°C)	Object (°C)	Ambient (°C)	Object (°C)	Ambient (°C)	Object (°C)	Ambient (°C)	
Supplementary information:									

5.4.1.4, 9.3, B.1.5, B.2.6	TABLE: Temperature measurements – Blues Inc						X0535	P
Supply voltage (V)..... :		1.7 Vdc					—	
Ambient temperature during test T_{amb} (°C) :		23	85°C (Max ambient temperature)				—	
Maximum measured temperature T of part/at:		T (°C)					Allowed T_{max} (°C)	
Top metal enclosure of cellular module		23	85				Note 1	
U14		23	85				150 (Note 2)	
U15		23	85				150 (Note 2)	
Ambient		23	85				--	
Temperature T of winding:	t_1 (°C)	R_1 (Ω)	t_2 (°C)	R_2 (Ω)	T (°C)	Allowed T_{max} (°C)	Insulation class	
Supplementary information:								
Power supply from modem power supply terminal. EUT does not power on.								
Notes								
1. Test result are for informative only. The evaluation to be determined as part of the end-product.								
2. Technical datasheet								
Tested by: EM								
Test Date: 9/1/23								
Ambient: 22.7C, 42.7% RH, 1016.2 hPa								
TI: 481, 464, 464-A, 193, 253, asset # 2754.								

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.4.1.4, 9.3, B.1.5, B.2.6		TABLE: Temperature measurements – Blues Inc				X0535	P
Supply voltage (V)..... :		3.0 Vdc					—
Ambient temperature during test T_{amb} (°C) :		23C	Scaled to 25C	Scaled to 85C			—
Maximum measured temperature T of part/at:		T (°C)					Allowed T_{max} (°C)
Ambient		23	25	85			--
U14		28	30	90			Note 1
U15		26	28	88			150 (Note 2)
Top metal enclosure of cellular module		29	31	91			150 (Note 2)
Temperature T of winding:	t_1 (°C)	R_1 (Ω)	t_2 (°C)	R_2 (Ω)	T (°C)	Allowed T_{max} (°C)	Insulation class
Supplementary information:							
Power supply from modem power supply terminal. No SIM card on test jig, modem idle							
Notes							
1. Test result are for informative only. The evaluation to be determined as part of the end-product.							
2. Technical datasheet							
Tested by: EM							
Test Date: 9/1/23							
Ambient: 22.7C, 42.7% RH, 1016.2 hPa							
TI: 481, 464, 464-A, 193, 253, asset # 2754.							

IEC 62368-1							
Clause	Requirement + Test				Result - Remark		Verdict
5.4.1.4, 9.3, B.1.5, B.2.6	TABLE: Temperature measurements – Blues Inc				X0535		P
Supply voltage (V)..... :	3.6 Vdc						—
Ambient temperature during test T_{amb} (°C) :	24	85°C (Max ambient temperature)					—
Maximum measured temperature T of part/at:	T (°C)						Allowed T_{max} (°C)
Top metal enclosure of cellular module	29	90					Note 1
U14	28	89					150 (Note 2)
U15	27	88					150 (Note 2)
Ambient	24	85					--
Temperature T of winding:	t_1 (°C)	R_1 (Ω)	t_2 (°C)	R_2 (Ω)	T (°C)	Allowed T_{max} (°C)	Insulation class
Supplementary information:							
Power supply from modem power supply terminal. No SIM card on test jig, modem idle							
Notes							
1. Test result are for informative only. The evaluation to be determined as part of the end-product.							
2. Technical datasheet							
Tested by: EM				Date: 8/31/23			
Lab Ambient:		24°C,	43% RH	1005 hPa			
Test Equipment Used: 481, 464, 464-A, 193, 253, asset # 2754							

IEC 62368-1							
Clause	Requirement + Test				Result - Remark		Verdict
5.4.1.4, 9.3, B.1.5, B.2.6	TABLE: Temperature measurements – Blues Inc				X0535		P
Supply voltage (V)..... :	5.0 Vdc						—
Ambient temperature during test T_{amb} (°C) :	24	85°C (Max ambient temperature)					—
Maximum measured temperature T of part/at:	T (°C)						Allowed T_{max} (°C)
Top metal enclosure of cellular module	29	90					Note 1
U14	28	89					150 (Note 2)
U15	27	88					150 (Note 2)
Ambient	24	85					--
Temperature T of winding:	t_1 (°C)	R_1 (Ω)	t_2 (°C)	R_2 (Ω)	T (°C)	Allowed T_{max} (°C)	Insulation class
Supplementary information:							
Power supply from modem power supply terminal. No SIM card on test jig, modem idle							
Notes							
1. Test result are for informative only. The evaluation to be determined as part of the end-product.							
2. Technical datasheet							
Tested by: EM							
Test Date: 9/5/23							
Ambient: 23.5C, 53.6% RH, 1003.9 hPa							
TI: 481, 464, 464-A, 193, 253, asset # 2754							

B.2.5		TABLE: Input test						N/A
U (V DC)	Hz	I (A)	I rated (A)	P (W)	P rated (W)	Fuse No	I fuse (A)	Condition/status
1.7	-	7.99uA	-	13.6uW	-	-	-	modem power supply, note 1
3.0		277.9mA		0.833W				modem power supply, note 2
3.6V	-	201.9mA	-	0.727W	-	-	-	modem power supply, note 3
5.07	-	119.7mA	-	0.607W	-	-	-	USB powered, note 4
Supplementary information:								

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
<p>Notes:</p> <ol style="list-style-type: none"> 1. Modem does not power on 2. Lowest threshold for boot up, current varied, max was observed and recorded 3. Current varied, max was observed and recorded 4. Current varied, max was observed and recorded <p>Tested by: EM</p> <p>Dates: 8/31/23 24.1C, 43.4% RH, 1004.9 hPa 9/1/23 22.7C, 42.7% RH, 1016.2 hPa 9/5/23 23.5C, 53.6% RH, 1003.9 hPa</p> <p>Equipment: asset # 2754, TI# 193, TI# 253</p>			

B.3, B.4		TABLE: Abnormal operating and fault condition tests				X0535	P
Ambient temperature T _{amb} (°C)..... :							—
Power source for EUT: Manufacturer, model/type, outputrating.. :							—
Component No.	Condition	Supply voltage (V)	Test time	Fuse no.	Fuse current (A)	Observation	
U14	Shorted pin 10 to pin 4 (Note 1)	3.6Vdc	54			Modem does not boot up. Stable temps, no hazard	
U15	Shorted pin 1 to pin 5 (Note 2)	5Vdc	64			Modem operated normally, stable temps, no hazard.	
Power supply terminal & Mini USB cable port on Notecarrier board	Connected to power source at the same time	3.6Vdc & 5Vdc	133			USB power took precedence. Modem operated normally. Stable temps, no hazard	
Supplementary information:							
<p>Test table is provided to record abnormal and fault conditions for all applicable energy sources including Thermal burn injury. Column "Abnormal/Fault." Specify if test condition by indicating "Abnormal" then the condition for a Clause B.3 test or "Single Fault" then the condition for Clause B.4.</p> <p>Notes:</p> <ol style="list-style-type: none"> 1. 3.6Vdc from modem power supply terminal 2. 5Vdc from USB cable <p>Tested by: EM</p> <p>Test Date: 9/5/23</p> <p>Ambient: 23.5C, 53.6% RH, 1003.9 hPa</p> <p>TI: 481, 464, 464-A, 193, 253, asset # 2754, 2, 251</p>							

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

M.3	TABLE: Protection circuits for batteries provided within the equipment						N/A
Is it possible to install the battery in a reverse polarity position?						—	
Equipment Specification	Charging						
	Voltage (V)			Current (A)			
Manufacturer/type	Battery specification						
	Non-rechargeable batteries			Rechargeable batteries			
	Discharging current (A)	Unintentional charging current (A)	Charging		Discharging current (A)	Reverse charging current (A)	
			Voltage (V)	Current (A)			
Note: The tests of M.3.2 are applicable only when above appropriate data is not available.							
Specified battery temperature (°C)							
Component No.	Fault condition	Charge/discharge mode	Test time	Temp. (°C)	Current (A)	Voltage (V)	Observation
Supplementary information:							
Abbreviation: SC= short circuit; OC= open circuit NL= no chemical leakage; NS= no spillage of liquid; NE= no explosion; NF= no emission of flame or expulsion of molten metal.							

M.4.2	TABLE: Charging safeguards for equipment containing a secondary lithium battery					N/A
Maximum specified charging voltage (V)					—	
Maximum specified charging current (A)					—	
Highest specified charging temperature (°C)						
Lowest specified charging temperature (°C)						
Battery manufacturer/type	Operating and fault condition	Measurement			Observation	
		Charging voltage (V)	Charging current (A)	Temp. (°C)		

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
Supplementary information:			
Abbreviation: SC= short circuit; OC= open circuit; MSCV= maximum specified charging voltage; MSCC= maximum specified charging current; HSCT= highest specified charging temperature; LSCT= lowest specified charging temperature			

Q.1	TABLE: Circuits intended for interconnection with building wiring (LPS)						N/A
Output Circuit	Condition	U _{oc} (V)	Time (s)	I _{sc} (A)		S (VA)	
				Meas.	Limit	Meas.	Limit
Supplementary Information:							

T.2, T.3, T.4, T.5	TABLE: Steady force test						N/A
Location/Part	Material	Thickness (mm)	Probe	Force (N)	Test Duration (s)	Observation	
Supplementary information:							

T.6, T.9	TABLE: Impact test				N/A
Location/Part	Material	Thickness (mm)	Height (mm)	Observation	
Supplementary information:					

T.7	TABLE: Drop test				N/A
Location/Part	Material	Thickness (mm)	Height (mm)	Observation	

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
Supplementary information:			

T.8	TABLE: Stress relief test					N/A
Location/Part	Material	Thickness (mm)	Oven Temperature (°C)	Duration (h)	Observation	
Supplementary information:						

X	TABLE: Alternative method for determining minimum clearances distances				N/A
Clearance distanced between:	Peak of working voltage (V)	Required cl (mm)	Measured cl (mm)		
Supplementary information:					

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

4.1.2	TABLE: Critical components information					P
Object / part No.	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity ¹⁾	
PCB	Shengyi Technology Co., Ltd	S1000HB PREPREG	Tg: 155°C Flammability rating: V-0	UL94	Evaluated as a part of the product	
U14	Texas instruments	TPS63020DSJR	Input voltage range: 1.8V to 5.5V Output voltage range: 1.2V to 5.5V Output current: 2A Max ambient: 85°C	IEC 62368-1	Evaluated as a part of the product	
U15	Diodes Incorporated	AP2139AK- 3.3TRG1	Input voltage: 6.6V Output voltage: 1.2V to 4.0V Output current: 250mA Max ambient: 85°C	IEC 62368-1	Evaluated as a part of the product	
Cellular module	Quectel	EG91NAXDGA- 128-SGNS	Supply voltage: 3.3Vdc-4.3Vdc Max power consumption: 29mA @ idle Max operating temperature: 75°C	IEC 62368-1	Evaluated as a part of the product	
Label	Bar kod sustavi d.o.o	none	Polypropylene	IEC 62368-1	Evaluated as a part of the product	
Supplementary information:						
1) Provided evidence ensures the agreed level of compliance. See OD-CB2039.						

Attachment 1: National Differences

IEC62368_1E - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
ATTACHMENT TO TEST REPORT			
IEC 62368-1			
EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES			
(Audio/video, information and communication technology equipment - Part 1: Safety requirements)			
Differences according to : EN IEC 62368-1:2020+A11:2020			
Attachment Form No. : EU_GD_IEC62368_1E			
Attachment Originator : UL(Demko)			
Master Attachment : 2021-02-04			
Copyright © 2021 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.			
	CENELEC COMMON MODIFICATIONS (EN)		P
	Clause numbers in the cells that are shaded light grey are clause references in EN IEC 62368-1:2020+A11:2020. All other clause numbers in that column, except for those in the paragraph below, refers to IEC 62368-1:2018. Clauses, subclauses, notes, tables, figures and annexes which are additional to those in IEC 62368-1:2018 are prefixed "Z".		P
	Add the following annexes: Annex ZA (normative) Normative references to international publications with their corresponding European publications Annex ZB (normative) Special national conditions Annex ZC (informative) A-deviations Annex ZD (informative) IEC and CENELEC code designations for flexible cords		P
1	Modification to Clause 3 .		N/A
3.3.19	Sound exposure <i>Replace 3.3.19 of IEC 62368-1 with the following definitions:</i>		N/A


IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
3.3.19.1	<p>momentary exposure level, MEL</p> <p>metric for estimating 1 s sound exposure level from the HD 483-1 S2 test signal applied to both channels, based on EN 50332-1:2013, 4.2.</p> <p>Note 1 to entry: MEL is measured as A-weighted levels in dB.</p> <p>Note 2 to entry: See B.3 of EN 50332-3:2017 for additional information.</p>		N/A
3.3.19.3	<p>sound exposure, E</p> <p>A-weighted sound pressure (p) squared and integrated over a stated period of time, T</p> <p>Note 1 to entry: The SI unit is Pa² s.</p> $E = \int_0^T p(t)^2 dt$		N/A
3.3.19.4	<p>sound exposure level, SEL</p> <p>logarithmic measure of sound exposure relative to a reference value, E_0, typically the 1 kHz threshold of hearing in humans.</p> <p>Note 1 to entry: SEL is measured as A-weighted levels in dB.</p> $SEL = 10 \lg\left(\frac{E}{E_0}\right) \text{ dB}$ <p>Note 2 to entry: See B.4 of EN 50332-3:2017 for additional information.</p>		N/A
3.3.19.5	<p>digital signal level relative to full scale, dBFS</p> <p>levels reported in dBFS are always r.m.s. Full scale level, 0 dBFS, is the level of a dc-free 997-Hz sine wave whose undithered positive peak value is positive digital full scale, leaving the code corresponding to negative digital full scale unused</p> <p>Note 1 to entry: It is invalid to use dBFS for non-r.m.s. levels. Because the definition of full scale is based on a sine wave, the level of signals with a crest factor lower than that of a sine wave may exceed 0 dBFS. In particular, square wave signals may reach +3,01 dBFS.</p>		N/A
2	Modification to Clause 10		N/A
10.6	<p>Safeguards against acoustic energy sources</p> <p>Replace 10.6 of IEC 62368-1 with the following:</p>		N/A
10.6.1.1	<p>Introduction</p> <p>Safeguard requirements for protection against long-term exposure to excessive sound pressure</p>		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>levels from personal music players closely coupled to the ear are specified below. Requirements for earphones and headphones intended for use with personal music players are also covered. A personal music player is a portable equipment intended for use by an ordinary person, that:</p> <ul style="list-style-type: none"> – is designed to allow the user to listen to audio or audiovisual content / material; and – uses a listening device, such as headphones or earphones that can be worn in or on or around the ears; and – has a player that can be body worn (of a size suitable to be carried in a clothing pocket) and is intended for the user to walk around with while in continuous use (for example, on a street, in a subway, at an airport, etc.). <p>EXAMPLES Portable CD players, MP3 audio players, mobile phones with MP3 type features, PDAs or similar equipment.</p> <p>Personal music players shall comply with the requirements of either 10.6.2 or 10.6.3.</p> <p>NOTE 1 Protection against acoustic energy sources from telecom applications is referenced to ITU-T P.360.</p> <p>NOTE 2 It is the intention of the Committee to allow the alternative methods for now, but to only use the dose measurement method as given in 10.6.5 in future. Therefore, manufacturers are encouraged to implement 10.6.5 as soon as possible.</p> <p>Listening devices sold separately shall comply with the requirements of 10.6.6. These requirements are valid for music or video mode only. The requirements do not apply to:</p> <ul style="list-style-type: none"> – professional equipment; <p>NOTE 3 Professional equipment is equipment sold through special sales channels. All products sold through normal electronics stores are considered not to be professional equipment.</p> <ul style="list-style-type: none"> – hearing aid equipment and other devices for assistive listening; – the following type of analogue personal music players: <ul style="list-style-type: none"> • long distance radio receiver (for example, a multiband radio receiver or world band radio receiver, an AM radio receiver), and • cassette player/recorder; <p>NOTE 4 This exemption has been allowed because this technology is falling out of use and it is expected that within a few years it will no longer exist. This exemption will not be extended to other technologies.</p> <ul style="list-style-type: none"> – a player while connected to an external amplifier that does not allow the user to walk around 		

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>while in use.</p> <p>For equipment that is clearly designed or intended primarily for use by children, the limits of the relevant toy standards may apply.</p> <p>The relevant requirements are given in EN 71-1:2011, 4.20 and the related tests methods and measurement distances apply.</p>		
10.6.1.2	<p>Non-ionizing radiation from radio frequencies in the range 0 to 300 GHz</p> <p>The amount of non-ionizing radiation is regulated by European Council Recommendation 1999/519/EC of 12 July 1999 on the limitation of exposure of the general public to electromagnetic fields (0 Hz to 300 GHz). For intentional radiators, ICNIRP guidelines should be taken into account for Limiting Exposure to Time-Varying Electric, Magnetic, and Electromagnetic Fields (up to 300 GHz). For hand-held and body mounted devices, attention is drawn to EN 50360 and EN 50566.</p>		N/A
10.6.2	Classification of devices without the capacity to estimate sound dose		N/A
10.6.2.1	<p>General</p> <p>This standard is transitioning from short-term based (30 s) requirements to long-term based (40 hour) requirements. These clauses remain in effect only for devices that do not comply with sound dose estimation as stipulated in EN 50332-3.</p> <p>For classifying the acoustic output $L_{Aeq,T}$, measurements are based on the A-weighted equivalent sound pressure level over a 30 s period.</p> <p>For music where the average sound pressure (long term $L_{Aeq,T}$) measured over the duration of the song is lower than the average produced by the programme simulation noise, measurements may be done over the duration of the complete song. In this case, T becomes the duration of the song.</p> <p>NOTE Classical music, acoustic music and broadcast typically has an average sound pressure (long term $L_{Aeq,T}$) which is much lower than the average programme simulation noise. Therefore, if the player is capable to analyse the content and compare it with the programme simulation noise, the warning does not need to be given as long as the average sound pressure of the song does not exceed the required limit. For example, if the player is set with the programme simulation noise to 85 dB, but the average music level of the song is only 65 dB, there is no need to give a warning or ask an acknowledgement as long as the average sound level of the song is not above the basic limit of 85 dB.</p>		N/A
10.6.2.2	RS1 limits (to be superseded, see 10.6.3.2)		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>RS1 is a class 1 acoustic energy source that does not exceed the following:</p> <ul style="list-style-type: none"> – for equipment provided as a package (player with its listening device), and with a proprietary connector between the player and its listening device, or where the combination of player and listening device is known by other means such as setting or automatic detection, the $L_{Aeq,T}$ acoustic output shall be ≤ 85 dB when playing the fixed “programme simulation noise” described in EN 50332-1. – for equipment provided with a standardized connector (for example, a 3,5 phone jack) that allows connection to a listening device for general use, the unweighted r.m.s. output voltage shall be ≤ 27 mV (analogue interface) or -25 dBFS (digital interface) when playing the fixed “programme simulation noise” described in EN 50332-1. – The RS1 limits will be updated for all devices as per 10.6.3.2. 		
10.6.2.3	<p>RS2 limits (to be superseded, see 10.6.3.3)</p> <p>RS2 is a class 2 acoustic energy source that does not exceed the following:</p> <ul style="list-style-type: none"> – for equipment provided as a package (player with its listening device), and with a proprietary connector between the player and its listening device, or when the combination of player and listening device is known by other means such as setting or automatic 130 detection, the $L_{Aeq,T}$ acoustic output shall be ≤ 100 dB(A) when playing the fixed “programme simulation noise” as described in EN 50332-1. – for equipment provided with a standardized connector (for example, a 3,5 phone jack) that allows connection to a listening device for general use, the unweighted r.m.s. output voltage shall be ≤ 150 mV (analogue interface) or -10 dBFS (digital interface) when playing the fixed “programme simulation noise” as described in EN 50332-1. 		N/A
10.6.2.4	<p>RS3 limits</p> <p>RS3 is a class 3 acoustic energy source that exceeds RS2 limits.</p>		N/A
10.6.3	Classification of devices (new)		N/A
10.6.3.1	<p>General</p> <p>Previous limits (10.6.2) created abundant false negative and false positive PMP sound level warnings. New limits, compliant with The Commission Decision of 23 June 2009, are given below.</p>		N/A
10.6.3.2	RS1 limits (new)		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>RS1 is a class 1 acoustic energy source that does not exceed the following:</p> <ul style="list-style-type: none"> – for equipment provided as a package (player with its listening device), and with a proprietary connector between the player and its listening device, or where the combination of player and listening device is known by other means such as setting or automatic detection, the $L_{Aeq,T}$ acoustic output shall be ≤ 80 dB when playing the fixed "programme simulation noise" described in EN 50332-1. – for equipment provided with a standardized connector (for example, a 3,5 phone jack) that allows connection to a listening device for general use, the unweighted r.m.s. output voltage shall be ≤ 15 mV (analogue interface) or -30 dBFS (digital interface) when playing the fixed "programme simulation noise" described in EN 50332-1. 		
10.6.3.3	<p>RS2 limits (new)</p> <p>RS2 is a class 2 acoustic energy source that does not exceed the following:</p> <ul style="list-style-type: none"> – for equipment provided as a package (player with its listening device), and with a proprietary connector between the player and its listening device, or where the combination of player and listening device is known by other means such as setting or automatic detection, the weekly sound exposure level, as described in EN 50332-3, shall be ≤ 80 dB when playing the fixed "programme simulation noise" described in EN 50332-1. – for equipment provided with a standardized connector (for example, a 3,5 phone jack) that allows connection to a listening device for general use, the unweighted r.m.s. output level, integrated over one week, as described in EN50332-3, shall be ≤ 15 mV (analogue interface) or -30 dBFS (digital interface) when playing the fixed "programme simulation noise" described in EN 50332-1. 		N/A
10.6.4	Requirements for maximum sound exposure		N/A
10.6.4.1	<p>Measurement methods</p> <p>All volume controls shall be turned to maximum during tests.</p> <p>Measurements shall be made in accordance with EN 50332-1 or EN 50332-2 as applicable.</p>		N/A
10.6.4.2	<p>Protection of persons</p> <p>Except as given below, protection requirements for parts accessible to ordinary persons, instructed persons and skilled persons are given in 4.3.</p> <p>NOTE 1 Volume control is not considered a safeguard.</p>		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>Between RS2 and an ordinary person, the basic safeguard may be replaced by an instructional safeguard in accordance with Clause F.5, except that the instructional safeguard shall be placed on the equipment, or on the packaging, or in the instruction manual.</p> <p>Alternatively, the instructional safeguard may be given through the equipment display during use.</p> <p>The elements of the instructional safeguard shall be as follows:</p> <ul style="list-style-type: none"> – element 1a: the symbol , IEC 60417-6044 (2011-01) – element 2: “High sound pressure” or equivalent wording – element 3: “Hearing damage risk” or equivalent wording – element 4: “Do not listen at high volume levels for long periods.” or equivalent wording <p>An equipment safeguard shall prevent exposure of an ordinary person to an RS2 source without intentional physical action from the ordinary person and shall automatically return to an output level not exceeding what is specified for an RS1 source when the power is switched off.</p> <p>The equipment shall provide a means to actively inform the user of the increased sound level when the equipment is operated with an output exceeding RS1. Any means used shall be acknowledged by the user before activating a mode of operation which allows for an output exceeding RS1. The acknowledgement does not need to be repeated more than once every 20 h of cumulative listening time.</p> <p>NOTE 2 Examples of means include visual or audible signals. Action from the user is always needed.</p> <p>NOTE 3 The 20 h listening time is the accumulative listening time, independent of how often and how long the personal music player has been switched off.</p> <p>A skilled person shall not be unintentionally exposed to RS3.</p>		
10.6.5	Requirements for dose-based systems		N/A
10.6.5.1	<p>General requirements</p> <p>Personal music players shall give the warnings as provided below when tested according to EN 50332-3, using the limits from this clause.</p> <p>The manufacturer may offer optional settings to allow the users to modify when and how they wish to receive the notifications and warnings to</p>		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>promote a better user experience without defeating the safeguards. This allows the users to be informed in a method that best meets their physical capabilities and device usage needs. If such optional settings are offered, an administrator (for example, parental restrictions, business/educational administrators, etc.) shall be able to lock any optional settings into a specific configuration.</p> <p>The personal music player shall be supplied with easy to understand explanation to the user of the dose management system, the risks involved, and how to use the system safely. The user shall be made aware that other sources may significantly contribute to their sound exposure, for example work, transportation, concerts, clubs, cinema, car races, etc.</p>		
10.6.5.2	<p>Dose-based warning and requirements</p> <p>When a dose of 100 % <i>CSD</i> is reached, and at least at every 100 % further increase of <i>CSD</i>, the device shall warn the user and require an acknowledgement. In case the user does not acknowledge, the output level shall automatically decrease to compliance with class RS1.</p> <p>The warning shall at least clearly indicate that listening above 100 % <i>CSD</i> leads to the risk of hearing damage or loss.</p>		N/A
10.6.5.3	<p>Exposure-based requirements</p> <p>With only dose-based requirements, cause and effect could be far separated in time, defying the purpose of educating users about safe listening practice. In addition to dose-based requirements, a PMP shall therefore also put a limit to the short-term sound level a user can listen at.</p> <p>The exposure-based limiter (EL) shall automatically reduce the sound level not to exceed 100 dB(A) or 150 mV integrated over the past 180 s, based on methodology defined in EN 50332-3.</p> <p>The EL settling time (time from starting level reduction to reaching target output) shall be 10 s or faster.</p> <p>Test of EL functionality is conducted according to EN 50332-3, using the limits from this clause. For equipment provided as a package (player with its listening device), the level integrated over 180 s shall be 100 dB or lower. For equipment provided with a standardized connector, the unweighted level integrated over 180 s shall be no more than 150 mV for an analogue interface and no more than -10 dBFS for a digital interface.</p>		

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	NOTE In case the source is known not to be music (or test signal), the EL may be disabled.		
10.6.6	Requirements for listening devices (headphones, earphones, etc.)		N/A
10.6.6.1	<p>Corded listening devices with analogue input</p> <p>With 94 dB L_{Aeq} acoustic pressure output of the listening device, and with the volume and sound settings in the listening device (for example, built-in volume level control, additional sound features like equalization, etc.) set to the combination of positions that maximize the measured acoustic output, the input voltage of the listening device when playing the fixed "programme simulation noise" as described in EN 50332-1 shall be ≥ 75 mV.</p> <p>NOTE The values of 94 dB and 75 mV correspond with 85 dB and 27 mV or 100 dB and 150 mV.</p>		N/A
10.6.6.2	<p>Corded listening devices with digital input</p> <p>With any playing device playing the fixed "programme simulation noise" described in EN 50332-1, and with the volume and sound settings in the listening device (for example, built-in volume level control, additional sound features like equalization, etc.) set to the combination of positions that maximize the measured acoustic output, the $L_{Aeq,T}$ acoustic output of the listening device shall be ≤ 100 dB with an input signal of -10 dBFS.</p>		N/A
10.6.6.3	<p>Cordless listening devices</p> <p>In cordless mode,</p> <ul style="list-style-type: none"> – with any playing and transmitting device playing the fixed programme simulation noise described in EN 50332-1; and – respecting the cordless transmission standards, where an air interface standard exists that specifies the equivalent acoustic level; and – with volume and sound settings in the receiving device (for example, built-in volume level control, additional sound features like equalization, etc.) set to the combination of positions that maximize the measured acoustic output for the above mentioned programme simulation noise, the $L_{Aeq,T}$ acoustic output of the listening device shall be ≤ 100 dB with an input signal of -10 dBFS. 		N/A
10.6.6.4	<p>Measurement method</p> <p><i>Measurements shall be made in accordance with EN 50332-2 as applicable.</i></p>		N/A
3	Modification to the whole document		P

IEC 62368-1																																																																		
Clause	Requirement + Test				Result - Remark	Verdict																																																												
	<p>Delete all the "country" notes in the reference document according to the following list:</p> <table border="1"> <tbody> <tr> <td>0.2.1</td> <td>Note 1 and 2</td> <td>1</td> <td>Note 4 and 5</td> <td>3.3.8.1</td> <td>Note 2</td> </tr> <tr> <td>3.3.8.3</td> <td>Note 1</td> <td>4.1.15</td> <td>Note</td> <td>4.7.3</td> <td>Note 1 and 2</td> </tr> <tr> <td>5.2.2.2</td> <td>Note</td> <td>5.4.2.3.2.2 Table 12</td> <td>Note c</td> <td>5.4.2.3.2.4</td> <td>Note 1 and 3</td> </tr> <tr> <td>5.4.2.3.2.4 Table 13</td> <td>Note 2</td> <td>5.4.2.5</td> <td>Note 2</td> <td>5.4.5.1</td> <td>Note</td> </tr> <tr> <td>5.4.10.2.1</td> <td>Note</td> <td>5.4.10.2.2</td> <td>Note</td> <td>5.4.10.2.3</td> <td>Note</td> </tr> <tr> <td>5.5.2.1</td> <td>Note</td> <td>5.5.6</td> <td>Note</td> <td>5.6.4.2.1</td> <td>Note 2 and 3 and 4</td> </tr> <tr> <td>5.6.8</td> <td>Note 2</td> <td>5.7.6</td> <td>Note</td> <td>5.7.7.1</td> <td>Note 1 and Note 2</td> </tr> <tr> <td>8.5.4.2.3</td> <td>Note</td> <td>10.2.1 Table 39</td> <td>Note 3 and 4 and 5</td> <td>10.5.3</td> <td>Note 2</td> </tr> <tr> <td>10.6.1</td> <td>Note 3</td> <td>F.3.3.6</td> <td>Note 3</td> <td>Y.4.1</td> <td>Note</td> </tr> <tr> <td>Y.4.5</td> <td>Note</td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>					0.2.1	Note 1 and 2	1	Note 4 and 5	3.3.8.1	Note 2	3.3.8.3	Note 1	4.1.15	Note	4.7.3	Note 1 and 2	5.2.2.2	Note	5.4.2.3.2.2 Table 12	Note c	5.4.2.3.2.4	Note 1 and 3	5.4.2.3.2.4 Table 13	Note 2	5.4.2.5	Note 2	5.4.5.1	Note	5.4.10.2.1	Note	5.4.10.2.2	Note	5.4.10.2.3	Note	5.5.2.1	Note	5.5.6	Note	5.6.4.2.1	Note 2 and 3 and 4	5.6.8	Note 2	5.7.6	Note	5.7.7.1	Note 1 and Note 2	8.5.4.2.3	Note	10.2.1 Table 39	Note 3 and 4 and 5	10.5.3	Note 2	10.6.1	Note 3	F.3.3.6	Note 3	Y.4.1	Note	Y.4.5	Note					P
0.2.1	Note 1 and 2	1	Note 4 and 5	3.3.8.1	Note 2																																																													
3.3.8.3	Note 1	4.1.15	Note	4.7.3	Note 1 and 2																																																													
5.2.2.2	Note	5.4.2.3.2.2 Table 12	Note c	5.4.2.3.2.4	Note 1 and 3																																																													
5.4.2.3.2.4 Table 13	Note 2	5.4.2.5	Note 2	5.4.5.1	Note																																																													
5.4.10.2.1	Note	5.4.10.2.2	Note	5.4.10.2.3	Note																																																													
5.5.2.1	Note	5.5.6	Note	5.6.4.2.1	Note 2 and 3 and 4																																																													
5.6.8	Note 2	5.7.6	Note	5.7.7.1	Note 1 and Note 2																																																													
8.5.4.2.3	Note	10.2.1 Table 39	Note 3 and 4 and 5	10.5.3	Note 2																																																													
10.6.1	Note 3	F.3.3.6	Note 3	Y.4.1	Note																																																													
Y.4.5	Note																																																																	
4	Modification to Clause 1					P																																																												
1	<p>Add the following note:</p> <p><i>NOTE Z1 The use of certain substances in electrical and electronic equipment is restricted within the EU: see Directive 2011/65/EU.</i></p>					P																																																												

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5	Modification to 4.Z1		N/A
4.Z1	<p><i>Add the following new subclause after 4.9:</i></p> <p>To protect against excessive current, short-circuits and earth faults in circuits connected to an a.c. mains, protective devices shall be included either as integral parts of the equipment or as parts of the building installation, subject to the following, a), b) and c):</p> <p>a) except as detailed in b) and c), protective devices necessary to comply with the requirements of B.3.1 and B.4 shall be included as parts of the equipment;</p> <p>b) for components in series with the mains input to the equipment such as the supply cord, appliance coupler, r.f.i. filter and switch, short-circuit and earth fault protection may be provided by protective devices in the building installation;</p> <p>c) it is permitted for pluggable equipment type B or permanently connected equipment, to rely on dedicated overcurrent and short-circuit protection in the building installation, provided that the means of protection, e.g. fuses or circuit breakers, is fully specified in the installation instructions.</p> <p>If reliance is placed on protection in the building installation, the installation instructions shall so state, except that for pluggable equipment type A the building installation shall be regarded as providing protection in accordance with the rating of the wall socket outlet.</p>	Class III powered device	N/A
6	Modification to 5.4.2.3.2.4		N/A
5.4.2.3.2.4	<p><i>Add the following to the end of this subclause:</i></p> <p>The requirement for interconnection with external circuit is in addition given in EN 50491-3:2009.</p>		N/A
7	Modification to 10.2.1		N/A
10.2.1	<p>Add the following to ^{c)} and ^{d)} in table 39:</p> <p>For additional requirements, see 10.5.1.</p>		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
8	Modification to 10.5.1		N/A
10.5.1	<p>Add the following after the first paragraph:</p> <p>For RS 1 compliance is checked by measurement under the following conditions:</p> <p>In addition to the normal operating conditions, all controls adjustable from the outside by hand, by any object such as a tool or a coin, and those internal adjustments or pre-sets which are not locked in a reliable manner, are adjusted so as to give maximum radiation whilst maintaining an intelligible picture for 1 h, at the end of which the measurement is made.</p> <p>NOTE Z1 Soldered joints and paint lockings are examples of adequate locking.</p> <p>The dose-rate is determined by means of a radiation monitor with an effective area of 10 cm², at any point 10 cm from the outer surface of the apparatus.</p> <p>Moreover, the measurement shall be made under fault conditions causing an increase of the high voltage, provided an intelligible picture is maintained for 1 h, at the end of which the measurement is made.</p> <p>For RS1, the dose-rate shall not exceed 1 µSv/h taking account of the background level.</p> <p>NOTE Z2 These values appear in Directive 96/29/Euratom of 13 May 1996.</p>	LED as indicator only	N/A
9	Modification to G.7.1		N/A
G.7.1	<p>Add the following note:</p> <p>NOTE Z1 The harmonized code designations corresponding to the IEC cord types are given in Annex ZD.</p>	No mains cord	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
10	Modification to Bibliography		N/A
	<p>Add the following notes for the standards indicated:</p> <p>IEC 60130-9 NOTE Harmonized as EN 60130-9. IEC 60269-2 NOTE Harmonized as HD 60269-2. IEC 60309-1 NOTE Harmonized as EN 60309-1. IEC 60364 NOTE some parts harmonized in HD 384/HD 60364 series. IEC 60601-2-4 NOTE Harmonized as EN 60601-2-4. IEC 60664-5 NOTE Harmonized as EN 60664-5. IEC 61032:1997 NOTE Harmonized as EN 61032:1998 (not modified). IEC 61508-1 NOTE Harmonized as EN 61508-1. IEC 61558-2-1 NOTE Harmonized as EN 61558-2-1. IEC 61558-2-4 NOTE Harmonized as EN 61558-2-4. IEC 61558-2-6 NOTE Harmonized as EN 61558-2-6. IEC 61643-1 NOTE Harmonized as EN 61643-1. IEC 61643-21 NOTE Harmonized as EN 61643-21. IEC 61643-311 NOTE Harmonized as EN 61643-311. IEC 61643-321 NOTE Harmonized as EN 61643-321. IEC 61643-331 NOTE Harmonized as EN 61643-331.</p>		N/A
11	ADDITION OF ANNEXES		N/A
ZB	ANNEX ZB, SPECIAL NATIONAL CONDITIONS (EN)		N/A
4.1.15	<p>Denmark, Finland, Norway and Sweden</p> <p>To the end of the subclause the following is added: Class I pluggable equipment type A intended for connection to other equipment or a network shall, if safety relies on connection to reliable earthing or if surge suppressors are connected between the network terminals and accessible parts, have a marking stating that the equipment shall be connected to an earthed mains socket-outlet.</p> <p>The marking text in the applicable countries shall be as follows:</p> <p>In Denmark: "Apparatets stikprop skal tilsluttes en stikkontakt med jord som giver forbindelse til stikproppens jord." In Finland: "Laitte on liitettävä suojakoskettimilla varustettuun pistorasiaan" In Norway: "Apparatet må tilkoples jordet stikkontakt" In Sweden: "Apparaten skall anslutas till jordat uttag"</p>	Class III	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
4.7.3	<p>United Kingdom</p> <p>To the end of the subclause the following is added:</p> <p>The torque test is performed using a socket-outlet complying with BS 1363, and the plug part shall be assessed to the relevant clauses of BS 1363. Also see Annex G.4.2 of this annex</p>	Class III	N/A
5.2.2.2	<p>Denmark</p> <p>After the 2nd paragraph add the following:</p> <p>A warning (marking safeguard) for high touch current is required if the touch current exceeds the limits of 3,5 mA a.c. or 10 mA d.c.</p>	Class III	N/A
5.4.11.1 and Annex G	<p>Finland and Sweden</p> <p>To the end of the subclause the following is added:</p> <p>For separation of the telecommunication network from earth the following is applicable:</p> <p>If this insulation is solid, including insulation forming part of a component, it shall at least consist of either</p> <ul style="list-style-type: none"> • two layers of thin sheet material, each of which shall pass the electric strength test below, or • one layer having a distance through insulation of at least 0,4 mm, which shall pass the electric strength test below. <p>If this insulation forms part of a semiconductor component (e.g. an optocoupler), there is no distance through insulation requirement for the insulation consisting of an insulating compound completely filling the casing, so that clearances and creepage distances do not exist, if the component passes the electric strength test in accordance with the compliance clause below and in addition</p> <ul style="list-style-type: none"> • passes the tests and inspection criteria of 5.4.8 with an electric strength test of 1,5 kV multiplied by 1,6 (the electric strength test of 5.4.9 shall be performed using 1,5 kV), <p>and</p> <ul style="list-style-type: none"> • is subject to routine testing for electric strength during manufacturing, using a test voltage of 1,5 kV. <p>It is permitted to bridge this insulation with a capacitor complying with EN 60384-14:2005, subclass Y2.</p>	No telecommunication network	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>A capacitor classified Y3 according to EN 60384-14:2005, may bridge this insulation under the following conditions:</p> <ul style="list-style-type: none"> the insulation requirements are satisfied by having a capacitor classified Y3 as defined by EN 60384-14, which in addition to the Y3 testing, is tested with an impulse test of 2,5 kV defined in 5.4.11; the additional testing shall be performed on all the test specimens as described in EN 60384-14; <p>the impulse test of 2,5 kV is to be performed before the endurance test in EN 60384-14, in the sequence of tests as described in EN 60384-14.</p>		
5.5.2.1	<p>Norway</p> <p>After the 3rd paragraph the following is added:</p> <p>Due to the IT power system used, capacitors are required to be rated for the applicable line-to-line voltage (230 V).</p>	No a.c. mains	N/A
5.5.6	<p>Finland, Norway and Sweden</p> <p>To the end of the subclause the following is added:</p> <p>Resistors used as basic safeguard or bridging basic insulation in class I pluggable equipment type A shall comply with G.10.1 and the test of G.10.2.</p>	Class III	N/A
5.6.1	<p>Denmark</p> <p>Add to the end of the subclause Due to many existing installations where the socket-outlets can be protected with fuses with higher rating than the rating of the socket-outlets the protection for pluggable equipment type A shall be an integral part of the equipment. <i>Justification:</i> In Denmark an existing 13 A socket outlet can be protected by a 20 A fuse.</p>	Class III	N/A
5.6.4.2.1	<p>Ireland and United Kingdom</p> <p>After the indent for pluggable equipment type A, the following is added: – the protective current rating is taken to be 13 A, this being the largest rating of fuse used in the mains plug.</p>	Class III	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.6.4.2.1	<p>France</p> <p>After the indent for pluggable equipment type A, the following is added: – in certain cases, the protective current rating of the circuit supplied from the mains is taken as 20 A instead of 16 A.</p>	Class III	N/A
5.6.5.1	<p>To the second paragraph the following is added:</p> <p>The range of conductor sizes of flexible cords to be accepted by terminals for equipment with a rated current over 10 A and up to and including 13 A is: 1,25 mm² to 1,5 mm² in cross-sectional area.</p>	Class III	N/A
5.6.8	<p>Norway</p> <p>To the end of the subclause the following is added: Equipment connected with an earthed mains plug is classified as class I equipment. See the Norway marking requirement in 4.1.15. The symbol IEC 60417-6092, as specified in F.3.6.2, is accepted.</p>	Class III	N/A
5.7.6	<p>Denmark</p> <p>To the end of the subclause the following is added:</p> <p>The installation instruction shall be affixed to the equipment if the protective conductor current exceeds the limits of 3,5 mA a.c. or 10 mA d.c.</p>	Class III	N/A

5.7.6.2	<p>Denmark</p> <p>To the end of the subclause the following is added: The warning (marking safeguard) for high touch current is required if the touch current or the protective current exceed the limits of 3,5 mA .</p>	Class III	N/A
5.7.7.1	<p>Norway and Sweden</p> <p>To the end of the subclause the following is added: The screen of the television distribution system is normally not earthed at the entrance of the building and there is normally no equipotential bonding system within the building. Therefore the protective earthing of the building installation needs to be isolated from the screen of a cable distribution system.</p> <p>It is however accepted to provide the insulation external to the equipment by an adapter or an interconnection cable with galvanic isolator, which may be provided by a retailer, for example.</p> <p>The user manual shall then have the following or similar information in Norwegian and Swedish language respectively, depending on in what country the equipment is intended to be used in:</p>	No coaxial cables	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>“Apparatus connected to the protective earthing of the building installation through the mains connection or through other apparatus with a connection to protective earthing – and to a television distribution system using coaxial cable, may in some circumstances create a fire hazard. Connection to a television distribution system therefore has to be provided through a device providing electrical isolation below a certain frequency range (galvanic isolator, see EN 60728-11)”</p> <p>NOTE In Norway, due to regulation for CATV-installations, and in Sweden, a galvanic isolator shall provide electrical insulation below 5 MHz. The insulation shall withstand a dielectric strength of 1,5 kV r.m.s., 50 Hz or 60 Hz, for 1 min.</p> <p>Translation to Norwegian (the Swedish text will also be accepted in Norway):</p> <p>“Apparater som er koplet til beskyttelsesjord via nettplugg og/eller via annet jordtilkoplede utstyr – og er tilkoplede et koaksialbasert kabel-TV nett, kan forårsake brannfare. For å unngå dette skal det ved tilkopling av apparater til kabel-TV nett installeres en galvanisk isolator mellom apparatet og kabel-TV nettet.”</p> <p>Translation to Swedish: “Apparater som är kopplad till skyddsjord via jordat vägguttag och/eller via annan utrustning och samtidigt är kopplad till kabel-TV nät kan i vissa fall medföra risk för brand. För att undvika detta skall vid anslutning av apparaten till kabel-TV nät galvanisk isolator finnas mellan apparaten och kabel-TV nätet.”.</p>		
8.5.4.2.3	<p>United Kingdom</p> <p>Add the following after the 2nd dash bullet in 3rd paragraph:</p> <p>An emergency stop system complying with the requirements of IEC 60204-1 and ISO 13850 is required where there is a risk of personal injury.</p>	No emergency stop systems	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
B.3.1 and B.4	<p>Ireland and United Kingdom</p> <p>The following is applicable:</p> <p>To protect against excessive currents and short-circuits in the primary circuit of direct plug-in equipment, tests according to Annexes B.3.1 and B.4 shall be conducted using an external miniature circuit breaker complying with EN 60898-1, Type B, rated 32A. If the equipment does not pass these tests, suitable protective devices shall be included as an integral part of the direct plug-in equipment, until the requirements of Annexes B.3.1 and B.4 are met</p>	Class III	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.4.2	<p>Denmark</p> <p>To the end of the subclause the following is added:</p> <p>Supply cords of single phase appliances having a rated current not exceeding 13 A shall be provided with a plug according to DS 60884-2-D1:2011.</p> <p>CLASS I EQUIPMENT provided with socket-outlets with earth contacts or which are intended to be used in locations where protection against indirect contact is required according to the wiring rules shall be provided with a plug in accordance with standard sheet DK 2-1a or DK 2-5a.</p> <p>If a single-phase equipment having a RATED CURRENT exceeding 13 A or if a polyphase equipment is provided with a supply cord with a plug, this plug shall be in accordance with the standard sheets DK 6-1a in DS 60884-2-D1 or EN 60309-2.</p> <p>Mains socket outlets intended for providing power to Class II apparatus with a rated current of 2,5 A shall be in accordance DS 60884-2-D1:2011 standard sheet DKA 1-4a.</p> <p>Other current rating socket outlets shall be in compliance with Standard Sheet DKA 1-3a or DKA 1-1c.</p> <p>Mains socket-outlets with earth shall be in compliance with DS 60884-2-D1:2011 Standard Sheet DK 1-3a, DK 1-1c, DK1-1d, DK 1-5a or DK 1-7a</p> <p><i>Justification:</i> Heavy Current Regulations, Section 6c</p>	Class III powered device	N/A
G.4.2	<p>United Kingdom</p> <p>To the end of the subclause the following is added:</p> <p>The plug part of direct plug-in equipment shall be assessed to BS 1363: Part 1, 12.1, 12.2, 12.3, 12.9, 12.11, 12.12, 12.13, 12.16, and 12.17, except that the test of 12.17 is performed at not less than 125 °C. Where the metal earth pin is replaced by an Insulated Shutter Opening Device (ISOD), the requirements of clauses 22.2 and 23 also apply.</p>	Class III powered device	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.7.1	<p>United Kingdom</p> <p>To the first paragraph the following is added:</p> <p>Equipment which is fitted with a flexible cable or cord and is designed to be connected to a mains socket conforming to BS 1363 by means of that flexible cable or cord shall be fitted with a 'standard plug' in accordance with the Plugs and Sockets etc. (Safety) Regulations 1994, Statutory Instrument 1994 No. 1768, unless exempted by those regulations.</p> <p>NOTE "Standard plug" is defined in SI 1768:1994 and essentially means an approved plug conforming to BS 1363 or an approved conversion plug.</p>	Class III powered device	N/A
G.7.1	<p>Ireland</p> <p>To the first paragraph the following is added:</p> <p>Apparatus which is fitted with a flexible cable or cord shall be provided with a plug in accordance with Statutory Instrument 525: 1997, "13 A Plugs and Conversion Adapters for Domestic Use Regulations: 1997. S.I. 525 provides for the recognition of a standard of another Member State which is equivalent to the relevant Irish Standard</p>		N/A
G.7.2	<p>Ireland and United Kingdom</p> <p>To the first paragraph the following is added:</p> <p>A power supply cord with a conductor of 1,25 mm² is allowed for equipment which is rated over 10 A and up to and including 13 A.</p>	Class III powered device	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
ZC	ANNEX ZC, NATIONAL DEVIATIONS (EN)		N/A
10.5.2	<p>Germany</p> <p>The following requirement applies:</p> <p>For the operation of any cathode ray tube intended for the display of visual images operating at an acceleration voltage exceeding 40 kV, authorization is required, or application of type approval (Bauartzulassung) and marking.</p> <p><i>Justification:</i> German ministerial decree against ionizing radiation (Röntgenverordnung), in force since 2002-07-01, implementing the European Directive 96/29/EURATOM.</p> <p>NOTE Contact address: Physikalisch-Technische Bundesanstalt, Bundesallee 100, D-38116 Braunschweig, Tel.: Int+49-531-592-6320, Internet: http://www.ptb.de</p>	No CRT present	N/A

ZD	IEC and CENELEC CODE DESIGNATIONS FOR FLEXIBLE CORDS (EN)		N/A		
	Type of flexible cord	Code designations		N/A	
		IEC	CENELEC		
	PVC insulated cords				
	Flat twin tinsel cord	60227 IEC 41	H03VH-Y		
	Light polyvinyl chloride sheathed flexible cord	60227 IEC 52	H03VV-F H03VVH2-F		
	Ordinary polyvinyl chloride sheathed flexible cord	60227 IEC 53	H05VV-F H05VVH2-F		
	Rubber insulated cords				
	Braided cord	60245 IEC 51	H03RT-F		
	Ordinary tough rubber sheathed flexible cord	60245 IEC 53	H05RR-F		
	Ordinary polychloroprene sheathed flexible cord	60245 IEC 57	H05RN-F		
	Heavy polychloroprene sheathed flexible cord	60245 IEC 66	H07RN-F		
	Cords having high flexibility				
	Rubber insulated and sheathed cord	60245 IEC 86	H03RR-H		
Rubber insulated, crosslinked PVC sheathed cord	60245 IEC 87	H03RV4-H			
Crosslinked PVC insulated and sheathed cord	60245 IEC 88	H03V4V4-H			
Cords insulated and sheathed with halogen-free thermoplastic compounds					
Light halogen-free thermoplastic insulated and sheathed flexible cords		H03Z1Z1-F H03Z1Z1H2-F			
Ordinary halogen-free thermoplastic insulated and sheathed flexible cords		H05Z1Z1-F H05Z1Z1H2-F			

ATTACHMENT TO TEST REPORT IEC 62368-1 EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES (Audio/video, information and communication technology equipment Part 1: Safety requirements)	
Differences according to	EN 62368-1:2014
Attachment Form No.	EU_GD_IEC62368_1B
Attachment Originator	Intertek Semko AB
Master Attachment	Date 2021-02-04
Copyright © 2021 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE)	

	CENELEC COMMON MODIFICATIONS (EN)		N/A
1	NOTE Z1		N/A
4.Z1	Protective devices included as integral parts of the equipment or as parts of the building installation:	Build-in component only	N/A
	a) Included as parts of the equipment		N/A
	b) For components in series with the mains; by devices in the building installation		N/A
	c) For pluggable type B or permanently connected; by devices in the building installation		N/A
5.4.2.3.2.4	Interconnection with external circuit	No interconnection with external circuit	N/A
10.2.1	Additional requirements in 10.5.1		N/A
10.5.1	RS1 compliance measurement conditions	No RS1	N/A
10.6.2.1	EN 71-1:2011, 4.20 and methods and distances		N/A
10.Z1	Non-ionizing radiation from radio frequencies in the range 0 to 300 GHz		N/A
G.7.1	NOTE Z1		N/A

ZB	ANNEX ZB, SPECIAL NATIONAL CONDITIONS (EN)		N/A
4.1.15	Denmark, Finland, Norway and Sweden: Class I pluggable equipment type A marking	Not class I equipment	N/A
4.7.3	United Kingdom: Torque test socket-outlet BS 1363, and the plug part BS 1363.	No socket outlet	N/A
5.2.2.2	Denmark: Warning for high touchcurrent	Build-in component	N/A
5.4.11.1 and Annex G	Finland and Sweden: Separation of the telecommunication network from earth	Build-in component	N/A
5.5.2.1	Norway: Capacitors rated for the applicable line-to-line voltage (230 V).	No such capacitor	N/A
5.5.6	Finland, Norway and Sweden: Resistors used as basic safeguard or bridging basic insulation comply with G.10.1 and G.10.2.	No such resistor	N/A
5.6.1	Denmark: Protection for pluggable equipment type A; integral part of the equipment	Build-in component	N/A
5.6.4.2.1	Ireland and United Kingdom: The protective current rating is taken to be 13 A	Build-in component	N/A
5.6.5.1	Ireland and United Kingdom: Conductor sizes of flexible cords to be accepted by terminals for equipment rated 10 A to 13 A	No such conductor	N/A

5.7.5	Denmark: The installation instruction affixed to the equipment if high protective conductor current	No such protective conductor	N/A
5.7.6.1	Norway and Sweden: Television distribution system isolation text in user manual	Not a television distribution system	N/A
5.7.6.2	Denmark: Warning for high touch current	Build-in component	N/A
B.3.1 and B.4	Ireland and United Kingdom: Tests conducted using an external miniature circuit breaker or protective devices included as an integral part of the direct plug-in equipment	Build-in component	N/A
G.4.2	Denmark: Appliances rated ≤ 13 A provided with a plug according to DS 60884-2-D1:2011.	Build-in component	N/A
	Class I equipment provided with socket-outlets provided with a plug in accordance with standard sheet DK 2-1a or DK 2-5a.	Not class I equipment	N/A
	If a single-phase equipment having rated >13 A or poly-phase equipment provided with a supply cord with a plug, plug in accordance with the standard sheets DK 6-1a in DS 60884-2-D1 or EN 60309-2.	Not such equipment	N/A
	Mains socket outlets intended for providing power to Class II apparatus rated 2,5 A in accordance with DS 60884-2-D1:2011 standard sheet DKA 1-4a.	No mains socket outlets	N/A
	Other current rating socket outlets in compliance with Standard Sheet DKA 1-3a or DKA 1-1c.	No socket outlet	N/A
	Mains socket-outlets with earth in compliance with DS 60884-2-D1:2011 Standard Sheet DK 1-3a, DK 1-1c, DK1-1d, DK 1-5a or DK 1-7a	No mains socket outlet	N/A
G.4.2	United Kingdom: The plug part of direct plug-in equipment assessed to BS 1363	Not a direct plug-in equipment	
G.7.1	United Kingdom: Equipment fitted with a 'standard plug' in accordance with the Plugs and Sockets etc (Safety) Regulations 1994, Statutory Instrument 1994 No. 1768	Build-in component	N/A
G.7.1	Ireland: Apparatus provided with a plug in accordance with Statutory Instrument 525: 1997, "13 A Plugs and Conversion Adapters for Domestic Use	Build-in component	N/A
G.7.2	Ireland and United Kingdom: A power supply cord for equipment which is rated over 10 A and up to and including 13 A.	No power supply cord	N/A

ZC	ANNEX ZC, NATIONAL DEVIATIONS (EN)		N/A
10.5.2	Germany: Cathode ray tube intended for the display of visual images, authorization or application of type approval and marking.	No such cathode ray tube	N/A
F.1	Italy: The power consumption in Watts (W) indicated on TV receiver and in instruction for use	No TV receiver	N/A

	TV receivers provided with an instruction for use, schematic diagrams and adjustments procedure in Italian language.		N/A
	Marking for controls and terminals in Italian language.		N/A
	Conformity declaration according to the above requirements in the instruction manual		N/A
	First importers of TV receivers manufactured outside EEC previous conformity certification to the Italian Post Ministry and Certification number on the backcover.		N/A

Attachment 2: Supplementary Test Data / Test Equipment / Measurement Uncertainty

8.4	TABLE: Access to Sharp Edges and Corners				N/A
<p><u>Compliance Criteria:</u></p> <p>1. Where a sharp edge or corner is required to be accessible for the function of the equipment, compliance is checked by inspection.</p> <p>2. Where a sharp edge or corner is not required to be accessible for the function of the equipment, compliance is checked by the tests of Annex V. During and after the application of the force, the sharp edge or corner shall not be accessible.</p> <p><u>Annex V Test Probes:</u></p> <p>The Jointed Test Probe for Equipment Likely to be Accessible to Children (Test Probe of Figure V.1) shall not contact parts described above when applied to openings in the enclosures after removal of parts that can be removed by the operator and with operator accessible doors and covers open.</p> <p>The Jointed Test Probe for Equipment Not Likely to be Accessible to Children (Test Probe of Figure V.2) shall not contact parts described above when applied to openings in the enclosures after removal of parts that can be removed by the operator and with operator accessible doors and covers open.</p> <p>The Blunt Probe (Test Probe of Figure V.3) shall not contact bare parts of contacts of TNV connectors.</p> <p>The Rigid Test Wire (Test Probe of Figure V.5) is inserted into the applicable opening with a force up to 1 N and with the length limited to 20 mm. While inserted, the probe is moved in an angle with minimal force. Parts that can be removed by the operator are left in place and doors and covers are left closed.</p>					
Component / Location	Visual Inspection	Category	Accessible with:		
			Jointed Probe	Rigid Test Wire	Blunt Probe
Whole EUT	N/A	MS1	N/A	N/A	N/A
<p>Supplementary information: MS1 only</p>					

8.6	TABLE: Stability			N/A
<p>Acceptance Criteria:</p> <p>Equipment shall not tip over. During the Glass Slide test, the equipment shall not slide or tip over.</p>				
Test Name	Test Parameter	Equipment Tip Over or Slide?	Comments	
Static Stability	[20% of unit weight] [250N] [10° tilt]			
Downward Force	800 N			
Relocation Stability	10° tilt			
Glass Slide	10° tilt			
Horizontal Force	[13% of unit weight] [100N] [15° tilt]			

Note 1: Equipment moved or relocated by Ordinary Persons, so all doors and drawers not having a positive means of retention and can be opened inadvertently, and casters, adjustable feet and the like arranged in any combination that results in the least stability.

Note 2: Equipment moved or relocated by an Instructed Person or a Skilled Person, so all doors, drawers, etc., positioned in accordance with the manufacturer's instructions.

Note 3: Equipment provided with multi-positional features, so tested in the least favorable position based on the equipment construction.

Supplementary information:

8.7	TABLE: Equipment mounted to a wall or ceiling				N/A
Acceptance Criteria: The Equipment or its associated mounting means shall not become dislodged and shall remain mechanically intact and secure during the test. Note: This is to test the fixing of the mounting means to the equipment and not to test the fixing to the wall or ceiling.					
Equipment Installation Description:					
Equipment Mass		Mounting Height	MS Classification	Enclosure Material	Preconditioning of Clause T.8
(kg)	(N)				
Clause	Description			Observations	Verdict
Test 1:	Specified Wall/Ceiling Mount. Hardware is provided or explained in Instructions				
A	Downwards Force through Center of Gravity for 1minute. Total Test Force: ____ <i>(3x Weight of EUT + EUT or 880N, Whichever is less)</i>				
B	50N Horizontal force applied to the Side/Lateral of the EUT for 1 minute				
Test 2:	No Specified Wall/Ceiling Mount, but EUT is provided w/ mounting hook/threaded hole				
Mount Attachment Points: ____		Total Test Force: ____ <i>(4x Weight of EUT or 880N divided by # of mount attachments)</i>			
A	Each Mount Point Tested to <u>perpendicular</u> force to center of axis for 1 minute. The force is applied in four directions, one direction at a time separated by 90°				
B	Each Mount Point Tested to <u>inward</u> force parallel to center of axis for 1 minute.				

C	Each Mount Point Tested to <u>outward</u> force parallel to center of axis for 1 minute.		
Test 3:	EUT is provided w/ Threaded Parts w/ or w/o mounting Means		
A	Screw Diameter: ____ Test Torque applied: ____		
Supplementary information:			

8.8.2	TABLE: Handle Strength	N/A	
A handle that is declared by the manufacturer for the purpose of lifting or carrying the equipment shall comply with the tests as specified in 8.8.2.			
Acceptance Criteria: <i>As a result of the test, the handle, its securing means, or that portion of the enclosure to which it is secured, shall not break, crack, or detach from the equipment.</i>			
Description			—
<i>A weight shall be uniformly applied over a 75 mm width at the center of the handle, without clamping. The weight shall be the equipment weight plus an additional weight as specified below:</i>			
<i>The additional weight shall be started at zero and gradually increased so that the test value is attained in 5 s to 10 s and maintained for 60 s. When more than one handle is provided, the force shall be distributed between the handles. When MS2 equipment is furnished more than one handle, and it can be considered capable of being carried by one handle, each handle shall be capable of sustaining the total force.</i>			
Weight of unit:		Applied weight	Verdict
<i>– for MS1 equipment with two or more handles, Weight of unit Plus a weight that exerts a force of three times the weight of the equipment</i> NOTE No tests apply to MS1 equipment having only one handle.			
<i>– for MS2 equipment, Weight of unit Plus a weight that exerts a force of three times the weight of the equipment</i>			
<i>– for MS3 equipment with a mass 50 kg or less, Weight of unit Plus a weight that exerts a force of two times the weight of the equipment or 75 kg, whichever is greater.</i> <i>– for MS3 equipment with a mass greater than 50 kg, Weight of unit Plus a weight that exerts a force of the weight of the equipment or 100 kg, whichever is greater.</i>			
Supplementary information: Equipment mass = _____ kg. Test mass = _____ kg			

8.9	TABLE: Wheel/Caster Strength Test	N/A	
The likelihood of MS3 and some MS2 equipment from tipping over during movement shall be reduced.			
Acceptance Criteria: During the test, the wheels or casters shall not be damaged or pull from its securing means.			
Description			—
Wheels or casters on MS3 equipment, intended to be moved as part of its Normal Operating Conditions, shall be capable of withstanding a pull of 20 N (2 kg, 4.5 lb-f).			

Test	Verdict	Observations
The wheel was pulled with a force of 20 N		
The caster was pulled with a force of 20 N		
Supplementary information:		

8.11	TABLE: Mounting Means for Rack Mounted Equipment)	N/A
<p>Mechanical Strength Test - With the Slide-Rail Mounted Equipment SRME in its extended position, a force in addition to the weight of the SRME is to be applied downwards through the center of gravity for 1 minute. The additional force applied to the slide-rails shall be equal to the greater of the following two values:</p> <ul style="list-style-type: none"> - 50% of the SRME weight plus a force of 330 N; or - 50% of the SRME weight, plus an additional weight, where the additional weight is equal to the SRME weight or a force of 530 N, whichever is less. <p>Mechanical Strength Test, 250 N, Including End Stops - A 250 N static push force is applied laterally, in both directions at or near the end of the SRME with the slide rails in their full extended (service) position for a period of 1 minute. The applied weight need not be in full contact with uneven surfaces but shall be concentrated within 30 mm of the end of the SRME.</p> <p>To test the integrity of the end stops, a 250 N pull and push force is applied at the front of the SRME in an attempt to cause the SRME to come off the slide-rail. The test is performed with the SRME in both the fully extended (service) position and the installed (use) position.</p> <p>Acceptance Criteria: The SRME and slide-rails shall remain secure for one complete cycle of travel on its slide-rails. The mounting means shall not bend or buckle to any extent that could introduce an injury. End stops shall retain the SRME in a safe position and shall not allow the SRME to slide past the end of the slide-rails.</p>		
Equipment Installation Description:		
Equipment Mass:		kg
Test Force:		N (minimum 50N)
Observations:		
Supplementary information:		

V.1		TABLE: Accessible parts of Equipment		N/A
Acceptance Criteria: Determining accessible Parts that can be touched by a body part.				
Clause	Description	Comments	Verdict	
Test Method 1:		Surfaces and openings test w/ jointed test probes		
V.1.2	Test Probe V.1 for equipment likely to be accessible to children			
	Test Probe V.2 for equipment not likely to be accessible to children			
Test Method 2:		Openings tested w/ straight unjointed test probes		
V.1.3	Test Probe V.1 for equipment likely to be accessible to children w/ 30N Force only if accessible by Test method 1			
	Test Probe V.2 for equipment not likely to be accessible to children w/ 30N Force only if accessible by Test method 1			
Test Method 3:		Plugs, Jacks, Connectors		
V.1.4	Figure V.3, Blunt Probe			
Test Method 4:		Slot Openings		
V.1.5	Figure V.4, Wedge Probe			
Test Method 5:		Terminals intended to be used by an ordinary person		
V.1.6	Figure V.5, Terminal Probe			
Supplementary information:				

Test Instrument Used List

Equipment Number	Equipment	Manufacturer Model Number	Range Used	Serial # BV Asset #	Equipment Category / Next Calibration
2	DMM	Fluke 175	#	83880123 946	Category I 4/11/23 4/11/24
44	Petroleum Spirit / Hexane	Fisher Scientific H306-1 Lot# 213840	N/A	N/A 719	Category I 5/26/26
193	DMM	Fluke 287	#	16290051 1580	Category I 6/23/23 6/23/24
251	DMM	Fluke 287	#	29020122 2037	Category I 12/2/22 12/2/23
253	DMM	Fluke 287	#	29340083 2039	Category I 12/2/22 12/2/23
464	Data Acquisition system	Keysight DAQ970A	See Cert.	MY58002170 2697	Category I 9/27/22 9/27/23
464-A	Data Acquisition system Card	Keysight DAQM900A		MY58002734 2720	Category III
481	Pressure/Humidity Temperature Datalogger	Extech SD700	0 to 50C \pm 0.8 10 to 90% RH \pm 4 10 to 1100hPa	A116190 2730	Category I 1/13/23 1/13/24
Asset 2754	DC Power Supply	B&K Prevcision 9111		459J22141 2754	Category 1 4/24/23 4/24/24

Measurement Uncertainty List

Notes:								
1) For "any range" worst case OD-5014 values are used. "Any range" means within the capabilities of the instrument.								
2) Type K premium thermocouples shall be used								
3) Worst case OD-5014 accuracy value used across multiple ranges.								
indicates that Guide 115 Procedure 1 may be required.								
Test Equipment #	Equipment Type	Manufacturer / Model	Range Used	Instrument Accuracy	OD-5014 Required Accuracy (+/-)	MU	Guide 115 Procedure	Notes
2	DMM	Fluke 175	Any Range	Resistance: +/-1.0%	3%	n/a	2	1
				Voltage: 1.5%	1.50%	n/a	2	1
				Current: +/-1.5%	1.50%	n/a	2	1
				Frequency: +/-0.01%	0.20%	n/a	2	1
3	DMM	Tenma 72-2040	Any Range	Resistance: +/-1.0%	3%	n/a	2	1
				Voltage: +/-1.5%	1.50%	n/a	2	1
				Current: +/-1.5%	1.50%	n/a	2	1
				Frequency: +/-0.02%	0.20%	n/a	2	1
4	DMM	Tenma 72-2040	Any Range	Resistance: +/-1.0%	3%	n/a	2	1
				Voltage: +/-1.5%	1.50%	n/a	2	1
				Current: +/-1.5%	1.50%	n/a	2	1
				Frequency: +/-0.02%	0.20%	n/a	2	1
5	DMM	Fluke 79III	Any Range	Resistance: +/-1.0%	3%	n/a	2	1
				Voltage: 1.5%	1.50%	n/a	2	1
				Current: +/-1.5%	1.50%	n/a	2	1
				Frequency: +/-0.01%	0.20%	n/a	2	1
12	Datalogger (Reference)	Fluke 2625A	0°C to + 200°C	Temperature: +/- 1.16°C	2°C	n/a	2	2, 3
15	Oscilloscope	Tektronics TDS340	Any Range	Voltage: +/-2%	1.50%	6.25%	1	3
				Frequency: +/-0.02%	0.20%	0.32%	2	
18	Force Gauge w/various fingers	ED&D APFI 1000N	0-300N	Force: +/-0.5%	6%	n/a	2	
23	Power	EL Control	30-100Hz	Voltage: +/- 0.5%	1.50%	n/a	2	
	Analyzer	NANOVIP		Current: +/-0.5%	1.50%	n/a	2	
	(Reference)			Frequency: +/- 0.05%	0.20%	n/a	2	
39	DMM	Fluke 79 III	Any Range	Resistance: +/-1.0%	3%	n/a	2	1
				Voltage: 1.5%	1.50%	n/a	2	1
				Current: +/-1.5%	1.50%	n/a	2	1
				Frequency: +/-0.01%	0.20%	n/a	2	1
41	Torque wrench	CDI 751LDIN	0 - 75 in lbs	Torque: +/- 4% of indicated value, from 20-100% of full scale.	10%	n/a	2	
71	Angle Meter	ED&D AM-1	Any Range	Angle: +/-1°	1°	n/a	2	1
72	Insulation Resistance Tester	AVO	Any Range	50V range: +/-2%	3%	n/a	2	1
		Megger BM80/2		100V range: +/-2%				
				250V range: +/-2%				
				500V range: +/-2%				
				1000V range: +/-2%				
				1-50V resistance: +/-2% (Other ranges) Resistance: +/-1%				
73	High Voltage Probe	Fluke	1 - 6kV pK <1 kHz	DC to 500 Hz: +/-1%	3%	n/a	2	
		80K-6		500Hz to 1kHz: +/-2%	3%	n/a	2	
				Above 1kHz: Output reading falls. (Typically, -30% at 10kHz)				
100	Dial Caliper	CEN-TECH 40926	0-150 mm	Linear dimension: +/-0.02mm	0.05mm	n/a	2	3

Bureau Veritas Consumer Products Services Inc.

One Distribution Center Circle, #1 • Littleton, MA 01460 USA • TEL (978) 486-8880 • FAX (978) 486-8828

Measurement Uncertainty List (continued)

101	Ground Bond Tester	QuadTech Guardian 1050	Any Range	Resistance: +/-1.0%	3%	n/a	2	1
				Current: +/-1.5%	1.50%	n/a	2	1
				Frequency: +/-0.1%	0.20%	n/a	2	1
114	Digital Scale (Reference)	Sartorius TE2101	20 – 2100 g	+/-0.2g (1% @ 20g)	1%	n/a	2	3
122	Stop Watch	Cole-Parmer 94460-55	Seconds	Timer: +/-8 sec per day (0.01%)	1%	n/a	2	
123	12x Eye Piece	Edmund Optics NT30-055 NT30-323	0 – 27mm	+/-0.005in. (0.13mm)	0.1mm	+0.6 / -0.19 mm	1	
124	Digital Caliper (Reference)	Mitutoyo CD-6"CSX	0 – 6"	+/-0.02%	0.50%	n/a	2	3
134	Datalogger	Fluke 2625A	0°C to + 200°C	Temperature: +/- 1.16°C	2°C	n/a	2	2, 3
135	Power Analyzer	Extech 380801	50/60Hz	Power: +/- 0.9% reading	3%	n/a	2	
				Voltage: +/-0.5%	1.50%	n/a	2	
				Current: +/- 0.5% reading	1.50%	n/a	2	
136	Thermometer	Fluke 53II	100 – 700 °C K Type T- probe	Temperature: 0.05% +/-0.3°C	3%	n/a	2	2, 3
145	Power Analyzer	Extech 380803	50/60Hz	Power: +/-0.9% reading + 5 digits	3%	n/a	2	
				Voltage: +/-0.5% reading + 5 digits	1.50%	n/a	2	
				Current: +/- 0.5 reading + 5 digits	1.50%	n/a	2	
146	Datalogger	Fluke 2625A	0°C to + 200°C	Temperature: +/- 1.16°C	2°C	n/a	2	2,3
147	Datalogger	Fluke 2625A	0°C to + 200°C	Temperature: +/- 1.16°C	2°C	n/a	2	2, 3
149	Digital Temp / Humidity Meter	Control Company 35519-044	0°C to 50°C, 25% to 95% RH	Temperature: ±1°C from 0 to 40°C, ±2°C ends of range Humidity: ±2% mid-range and ±4% elsewhere	2°C 6% RH	n/a n/a	2 2	
157	Timer/ Stopwatch	Cole-Parmer 94460-04	Seconds	Timer: ±8.64 sec/day (0.01%)	1%	n/a	2	
158	Timer/ Stopwatch	Cole-Parmer 94460-04	Seconds	Timer: ±8.64 sec/day (0.01%)	1%	n/a	2	
160	Digital Torque Screwdriver	Imada	0 - 10 N-m	Torque: +/-0.5%	10%	n/a	2	
		DI-5N-RL10						
162	Scale	Pelouze 4040UL-88	4- 400 lbs (9 - 181 kg)	+/-0.5 lb. (+/-0.2kg)	5%	6.67%	1	
169	Electrical Safety Analyzer	Associated Research 08104	50/60Hz	Leakage Current 1.5% + 3 counts	3.50%	2.55%	1	
				Frequency: +/-0.1%	0.20%	n/a	2	3
				Ground Bond: 3% + 3mohm	5%	3.27	1	
				Current: +/-1.0% of reading	1.50%	n/a	2	3
173	Line Leakage Tester	Associated Research 620L	Any Range	Leakage Current RMS: +/- 2.0%	3.50%	n/a	2	3
				Leakage Current Peak: +/- 2.0%	3.50%	n/a	2	3
175	Pressure /Vacuum Transducer Module	Fluke PV350	up to 350 PSI	Pressure: +/-1% (+/-0.3PSI) up to 350PSI	5%	n/a	2	
			Any Range	Vacuum: +/-1.0% (+/-0.5Hg)	5%	n/a	2	
191	Digital Hygrometer / Thermometer (Reference)	Cole Parmer 03313-65	- 40°C to +104°C, 10% to 95% RH	Temperature: +/-0.2°C	2°C	n/a	2	3
				Humidity: +/-1.5%RH	6% RH	n/a	2	
200	Datalogger	Agilent 34970A	0°C to + 200°C	Temperature: +/- 1.16°C	2%	n/a	2	2, 3
201	Leakage Current Meter	Simpson 228	0 – 10 mA	Current: +/-2%	3.50%	n/a	2	
221	Oscilloscope	Tektronix MSO2024B	Any Range	Voltage: +/-2%	1.50%	6.25%	1	
				Frequency: +/-0.02%	0.20%	0.32%	2	

Attachment 3: Certificates / Component Information



Blues Inc
50 Harbor St,
Manchester MA
01944

To Whom It May Concern,

Based on its large degree of physical and electrical similarity to the other products in this list, but having the largest maximum transmit power, you may consider the NOTE-WBNAW to be the worst-case device amongst this family of devices for purposes of certification testing.

- NOTE-NBGLW
- NOTE-NBNAW
- NOTE-WBEXW
- NOTE-WBGLW
- **NOTE-WBNAW**

John Wiedey

A handwritten signature in black ink on a light gray background. The signature is cursive and appears to read 'John Wiedey'.

Principal Engineer
Blues Inc

Attachment 4: Illustrations / Photographs

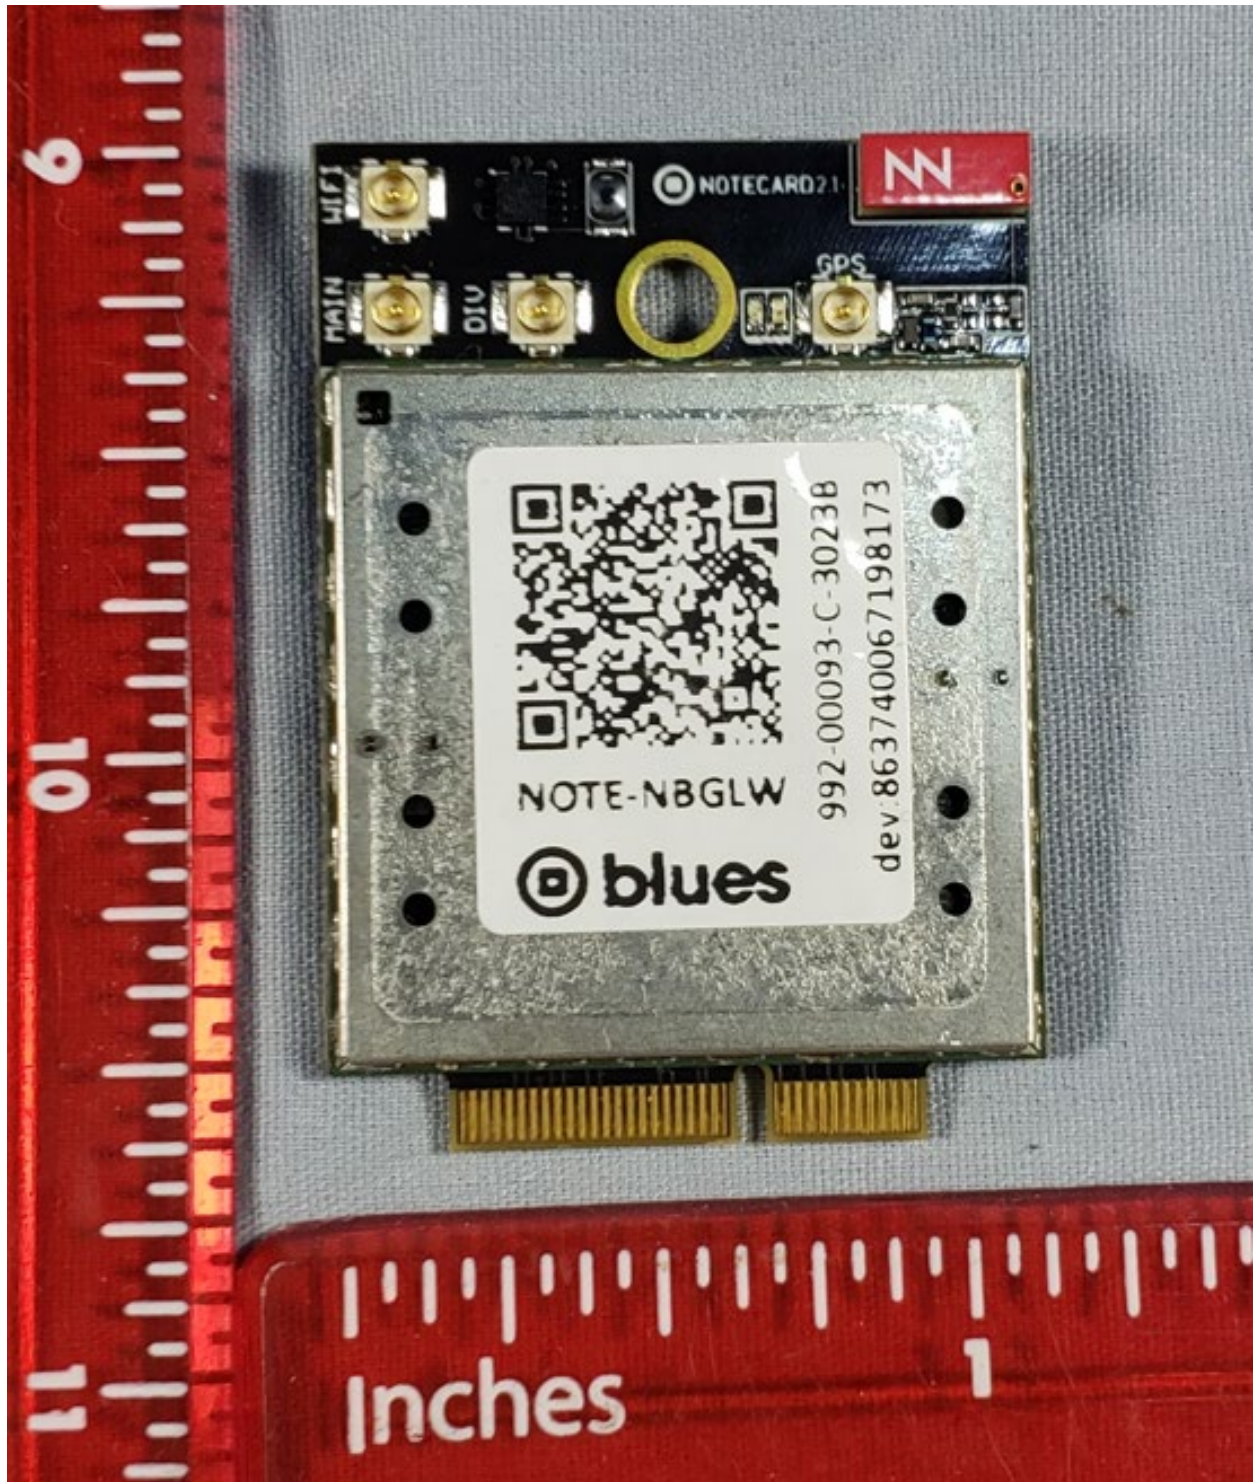


Photo 1 - WO# X0535 — Notecard model NBGLW — Top View

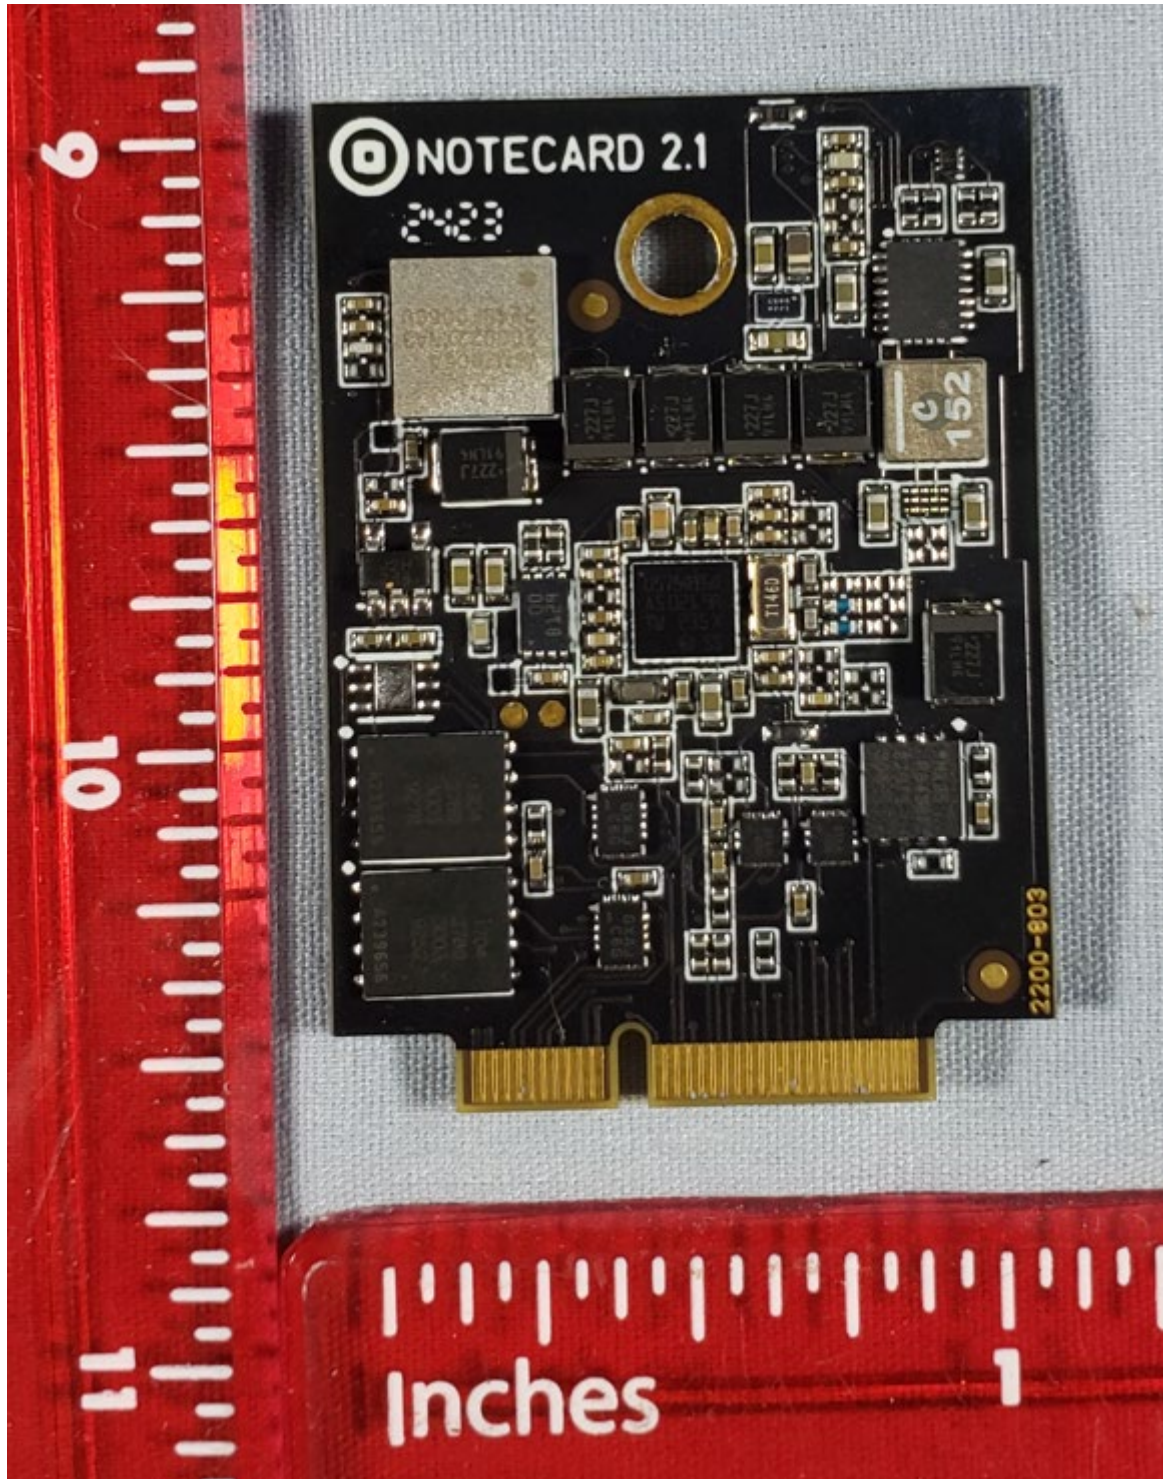


Photo 2 - WO# X0535 — Notecard model NBGLW — Back View

Conditions Of Testing

[Bureau Veritas Consumer Products Services, Inc., a Massachusetts corporation], and/or its affiliates (collectively, the "Company") will conduct, at the request of the Submitter ("Client"), the tests specified on the submitted Test Request Form or equivalent in accordance with, and subject to, the following terms and conditions (collectively, "Conditions"):

1. All orders for tests are subject to acceptance by the Company, and no order will constitute a binding commitment of the Company unless and until such order is accepted by it, as evidenced by the issuance of a written report ("Test Report") by the Company. The Test Report is issued solely by the Company, is intended for the exclusive use of Client and shall not be published, used for advertising purposes, copied or replicated for distribution to any other person or entity or otherwise publicly disclosed without the prior written consent of the Company. By submitting a request for services to the Company, Client consents to the disclosure to accreditation bodies of those records of Client relevant to the accreditation body's assessment of the Company's competence and compliance with relevant accreditation criteria. The Company shall not be liable for any loss or damage whatsoever resulting from the failure of the Company to provide its services within any time period for completion estimated by the Company. If Client anticipates using the Test Report in any legal proceeding, arbitration, dispute resolution forum or other proceeding, it shall so notify the Company prior to submitting the Test Report in such proceeding. The Company has no obligation to provide a fact or expert witness at such proceeding unless the Company agrees in advance to do so for a separate and additional fee.
2. The Test Report will set forth the findings of the Company solely with respect to the test samples identified therein. Unless specifically and expressly indicated in the Test Report, the results set forth in such Test Report are not intended to be indicative or representative of the quality or characteristics of the lot from which a test sample is taken, and Client shall not rely upon the Test Report as being so indicative or representative of the lot or of the tested product in general. The Test Report will reflect the findings of the Company at the time of testing only, and the Company shall have no obligation to update the Test Report after its issuance. The Test Report will set forth the results of the tests performed by the Company based upon the written information provided to the Company. The Test Report will be based solely on the samples and written information submitted to the Company by Client, and the Company shall not be obligated to conduct any independent investigation or inquiry with respect thereto.
3. The Company may, in its sole discretion, destroy samples which have been furnished to the Company for testing and which have not been destroyed in the course of testing. The Company may delegate the performance of all or a portion of the services contemplated hereunder to an affiliate, agent or subcontractor of the Company, and Client consents to such delegation.
4. These Conditions and the Test Report represent the entire understanding of the parties hereto with respect to the subject matter hereof and of the Test Report, and no modification, variance or extrapolation with respect thereto shall be permitted without the prior written consent of the Company.
5. The names, service marks, trademarks and copyrights of the Company and its affiliates, including the names "**BUREAU VERITAS**," "**BUREAU VERITAS CONSUMER PRODUCTS SERVICES**," "**BVCPS**," "**MTL**," "**ACTS**," "**MTL-ACTS**" and "**CURTIS-STRAUS**" (collectively, the "Marks") are and shall remain the sole property of the Company or its affiliates and shall not be used by Client except solely to the extent that Client obtains the prior written approval of the Company and then only in the manner prescribed by the Company. Client shall not contest the validity of the Marks or take any action that might impair the value or goodwill associated with the Marks or the image or reputation of the Company or its affiliates.
6. Payment in full shall be due 30 days after the date of invoice. Interest shall be due on overdue amounts from the due date until paid at an interest rate of 1.5% per month or, if less, the maximum rate permitted by law. The Company reserves the right, at any time and from time to time, to revoke any credit extended to Client. Client shall reimburse the Company for any costs it incurs in collecting past due amounts, including court costs and fees and expenses of attorneys and collection agencies. The Test Report may not be used or relied upon by Client if and for so long as Client fails to pay when due any invoice issued by the Company or any affiliate of it to Client or any affiliate or subsidiary of Client together with interest and penalties, if any, accrued thereon.
7. The Company disclaims any and all responsibility or liability arising out of or in connection with e-mail transmissions of such information.
8. Client understands and agrees that the Company is neither an insurer nor a guarantor, that the Company does not take the place of Client or any designer, manufacturer, agent, buyer, distributor or transportation or shipping company, and that the Company disclaims all liability in such capacities. Client further understands that if it seeks assurance against loss or damage, it should obtain appropriate insurance.
9. Client agrees that the Company, by providing the services, does not take the place of Client nor any third party, nor does the Company release them from any of their obligations, nor does the Company otherwise assume, abridge, abrogate or undertake to discharge any duty of any third party to Client or any duty of Client or any third party to any other third party, and Client will not release any third party from its obligations and duties with respect to the tested goods.
10. Client shall, on a timely basis, (a) provide adequate instructions to the Company in order to enable the Company to perform properly its services, (b) provide, or cause Client's suppliers and contractors to provide, the Company with all documents necessary to enable the Company to perform its services, (c) furnish the Company with all relevant information regarding Client's intended use and purposes of the tested goods, (d) advise the Company of essential dates and deadlines relevant to the tested goods and (e) fully exercise all rights and remedies available to Client against third parties in respect of the tested goods.
11. The Company shall undertake due care and ordinary skill in the performance of its services to Client, and the Company shall accept responsibility only where such skill has not been exercised and, even in such event, only to the extent of the limitation of liability set forth herein.
12. If Client desires to assert a claim arising from or relating to (i) the performance, purported performance or non-performance of any services by the Company or (ii) the sale, resale, manufacture, distribution or use of any tested goods, it must submit that claim to the Company in a writing that sets forth with particularity the basis for such claim within 60 days from discovery of the potential claim and not more than six months after the date of issuance of the Test Report to Client. Client waives any and all such claims including, without limitation, claims that the Test Report is inaccurate, incomplete or misleading or that additional or different testing is required, unless and then only to the extent that Client submits a written claim to the Company within both such time periods.
13. CLIENT SHALL, EXCEPT TO THE EXTENT OF COMPANY'S LIABILITY TO CLIENT HEREUNDER (WHICH IN NO EVENT SHALL EXCEED THE LIMITATION OF LIABILITY HEREIN), HOLD HARMLESS AND INDEMNIFY THE COMPANY, ITS AFFILIATES AND THEIR RESPECTIVE DIRECTORS, OFFICERS, EMPLOYEES, AGENTS AND SUBCONTRACTORS AGAINST ALL ACTUAL OR ALLEGED THIRD PARTY CLAIMS FOR LOSS, DAMAGE OR EXPENSE OF WHATSOEVER NATURE AND HOWSOEVER ARISING FROM OR RELATING TO (i) THE PERFORMANCE, PURPORTED PERFORMANCE OR NON-PERFORMANCE OF ANY SERVICES BY THE COMPANY OR (ii) THE SALE, RESALE, MANUFACTURE, DISTRIBUTION OR USE OF ANY TESTED GOODS.
14. EXCEPT AS MAY OTHERWISE BE EXPRESSLY AGREED TO IN WRITING BY THE COMPANY AND NOTWITHSTANDING ANY PROVISION TO THE CONTRARY CONTAINED HEREIN OR IN ANY TEST REPORT, NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR USE, IS MADE.

Bureau Veritas Consumer Products Services Inc.

One Distribution Center Circle, #1 • Littleton, MA 01460 USA • TEL (978) 486-8880 • FAX (978) 486-8828

15. (A) IN NO EVENT WHATSOEVER SHALL THE COMPANY BE LIABLE FOR ANY CONSEQUENTIAL, SPECIAL, INCIDENTAL, EXEMPLARY OR PUNITIVE DAMAGES IN CONNECTION WITH, RELATING TO OR ARISING OUT OF THE TEST REPORT OR THE SERVICES PROVIDED BY THE COMPANY HEREUNDER, INCLUDING WITHOUT LIMITATION LOSS OF OR DAMAGE TO PROPERTY; LOSS OF INCOME, PROFIT OR USE; OR ANY CLAIMS OR DEMANDS MADE AGAINST CLIENT OR ANY OTHER PERSON BY ANY THIRD PARTY IN CONNECTION WITH, RELATING TO OR ARISING OUT OF THE SERVICES PROVIDED BY THE COMPANY HEREUNDER.

(B) NOTWITHSTANDING ANY PROVISION TO THE CONTRARY CONTAINED HEREIN, AND IN RECOGNITION OF THE RELATIVE RISKS AND BENEFITS TO CLIENT AND THE COMPANY ASSOCIATED WITH THE TESTING SERVICES CONTEMPLATED HEREBY, THE RISKS HAVE BEEN ALLOCATED SUCH THAT UNDER NO CIRCUMSTANCES WHATSOEVER SHALL THE LIABILITY OF THE COMPANY TO CLIENT OR ANY THIRD PARTY IN RESPECT OF ANY CLAIM FOR LOSS, DAMAGE OR EXPENSE, OF WHATSOEVER NATURE OR MAGNITUDE, AND HOWSOEVER ARISING, EXCEED AN AMOUNT EQUAL TO FIVE (5) TIMES THE AMOUNT OF THE FEES PAID TO THE COMPANY FOR THE SPECIFIC SERVICES WHICH GAVE RISE TO SUCH CLAIM OR U.S.\$10,000, WHICHEVER IS THE LESSER AMOUNT.

16. The Company shall not be liable for any loss or damage resulting from any delay or failure in performance of its obligations hereunder resulting directly or indirectly from any event of force majeure or any event outside the control of the Company. If any such event occurs, the Company may immediately cancel or suspend its performance hereunder without incurring any liability whatsoever to Client.

Company's services, including these Conditions, shall be governed by, and construed in accordance with, the local laws of the country where the Company performs the tests or, in the case of tests performed in the United States of America, the laws of Massachusetts without regard to conflicts of laws principles. If any aspect(s) of these Conditions is found to be illegal or unenforceable, the validity, legality and enforceability of all remaining aspects of these Conditions shall not in any way be affected or impaired thereby. Any proceeding related to the subject matter hereof shall be brought, if at all, in the courts of the country where the Company performs the tests or, in the case of tests performed in the United States of America, in the courts of Massachusetts. Client waives the right to interpose any counterclaim or setoffs of any nature in any litigation arising hereunder. The complete list of the Approved Subcontractors Curtis-Straus may use to delegate the performance of work can be provided upon request.
Rev.160009121(2)_#684340 v14CS

— END OF TEST REPORT —