

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: EN 301 489-1 V2.2.3 (2019-11)
EN 301 489-3 V2.3.2 (2023-01)

Report No.: RMAAGC-WTW-P23110065

Product: Notecard

Brand: Blues Inc.

Model No.: NOTE-LWEU

Received Date: 2023/11/2

Test Date: 2023/11/7 ~ 2023/11/9

Issued Date: 2024/8/13

Applicant: Blues Inc.

Address: 50 Harbor St Manchester, MA, 01944-1425 United States.

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kewi Shan Dist., Taoyuan City 33383, Taiwan

Approved by: _____

Leo Hsu

, Date: _____

2024/8/13

Leo Hsu / Project Engineer

This test report consists of 31 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Prepared by : Lena Wang / Specialist

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	3
1 Certificate.....	4
2 Summary of Test Results	5
2.1 Performance Criteria	6
2.2 Measurement Uncertainty	7
2.3 Supplementary Information	7
3 General Information	8
3.1 Description of EUT	8
3.2 Primary Clock Frequencies of Internal Source.....	8
3.3 Features of EUT	8
3.4 Operating Modes of EUT and Determination of Worst Case Operating Mode	9
3.5 Test Program Used and Operation Descriptions	9
3.6 Connection Diagram of EUT and Peripheral Devices	10
3.7 Configuration of Peripheral Devices and Cable Connections	12
4 Test Instruments	13
4.1 Radiated Emissions up to 1 GHz	13
4.2 Radiated Emissions above 1 GHz.....	14
4.3 Electrostatic Discharges (ESD)	15
4.4 Radio Frequency Electromagnetic Field (RS).....	15
5 Limits of Test Items.....	16
5.1 Radiated Emissions up to 1 GHz	16
5.2 Radiated Emissions above 1 GHz.....	16
5.3 General immunity requirements	17
6 Test Arrangements.....	18
6.1 Radiated Emissions up to 1 GHz	18
6.2 Radiated Emissions above 1 GHz.....	19
6.3 Electrostatic Discharges (ESD)	20
6.4 Radio Frequency Electromagnetic Field (RS).....	22
7 Test Results of Test Item	23
7.1 Radiated Emissions up to 1 GHz	23
7.2 Radiated Emissions above 1 GHz.....	25
7.3 Electrostatic Discharges (ESD)	27
7.4 Radio Frequency Electromagnetic Field (RS).....	27
8 Pictures of Test Arrangements	28
8.1 Radiated Emissions up to 1 GHz	28
8.2 Radiated Emissions above 1 GHz.....	29
8.3 Electrostatic Discharges (ESD)	30
8.4 Radio Frequency Electromagnetic Field (RS).....	30
9 Information of the Testing Laboratories	31

Release Control Record

Issue No.	Description	Date Issued
RMAAGC-WTW-P23110065	Original release.	2024/8/13

1 Certificate

Product: Notecard
Brand: Blues Inc.
Test Model: NOTE-LWEU
Sample Status: Engineering sample
Applicant: Blues Inc.
Test Date: 2023/11/7 ~ 2023/11/9
Standard: EN 301 489-1 V2.2.3 (2019-11)
EN 301 489-3 V2.3.2 (2023-01)
Measurement procedure: EN 55032: 2015+A11:2020, Class B
EN 61000-4-2: 2009
EN IEC 61000-4-3: 2020

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

2 Summary of Test Results

The test items that the EUT need to perform in accordance with its interfaces, evaluated functions are as follows:

Standard	Test Item	Result	Remark
EN 55032	Radiated Emissions up to 1 GHz	Pass	Minimum passing Class B margin is -4.01 dB at 993.89 MHz
EN 55032	Radiated Emissions above 1 GHz	Pass	Minimum passing Class B margin is -7.67 dB at 2608.58 MHz
EN 61000-4-2	Electrostatic Discharges (ESD)	Pass	For EN 301 489 Performance Criteria A
EN IEC 61000-4-3	Radio Frequency Electromagnetic Field (RS)	Pass	For EN 301 489 Performance Criteria A

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Performance Criteria

For EN 301 489-series

General Performance Criteria

For the purpose of the present document two categories of performance criteria apply:

- Performance criteria for **C**ontinuous **P**henomena (**CP**).
- Performance criteria for **T**ransient **P**henomena (**TP**).

NOTE: Normally, the performance criteria depends upon the type of radio equipment and/or its intended application.

Performance criteria for Continuous Phenomena (CP)

During the test, the equipment shall:

- continue to operate as intended;
- not unintentionally transmit;
- not unintentionally change its operating state;
- not unintentionally change critical stored data.

Performance criteria for Transient Phenomena (TP)

For all ports and transient phenomena with the exception described below, the following applies:

- The application of the transient phenomena shall not result in a change of the mode of operation (e.g. unintended transmission) or the loss of critical stored data.
- After application of the transient phenomena, the equipment shall operate as intended.

For surges applied to symmetrically operated wired network ports intended to be connected directly to outdoor lines the following criteria applies:

- For products with only one symmetrical port intended for connection to outdoor lines, loss of function is allowed, provided the function is self-recoverable, or can be otherwise restored. Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.
- For products with more than one symmetrical port intended for connection to outdoor lines, loss of function on the port under test is allowed, provided the function is self-recoverable. Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

For a 70% residual voltage dip and voltage interruption tests, the following performance criteria apply:

- in the case where the equipment is fitted with or connected to a battery back-up, the performance criteria for transient phenomena (TP);
- in the case where the equipment is powered solely from the AC mains supply (without the use of a parallel battery back-up) volatile user data may have been lost and if applicable the communication link need not to be maintained and lost functions should be recoverable by user or operator;
- no unintentional responses shall occur at the end of the test, when the voltage is restored to nominal;
- in the event of loss of function(s) or in the event of loss of user stored data, this fact shall be recorded.

Product Specific Performance Criteria

The particular performance criteria which are specified in the relevant part of EN 301 489 series dealing with the particular type of radio equipment, take precedence over the corresponding parts of the general performance criteria.

Where particular performance criteria for specific functions are not given, then the general performance criteria shall apply.

EN 301 489-3, Short Range Devices (SRD) operating on frequencies between 9 kHz and 246 GHz

The performance criteria used to make an assessment whether a radio equipment passes or fails immunity tests. In the table A below:

- performance criterion A applies for immunity tests with phenomena of a continuous nature;
- performance criterion B applies for immunity tests with phenomena of a transient nature.
- performance criterion C for immunity tests with power interruptions exceeding a certain time.

Table A: Performance Requirements

Criteria	During test	After test
A	Operate as intended No loss of function No unintentional responses	Operate as intended No loss of function No degradation of performance No loss of stored data or user programmable functions
B	May show loss of function No unintentional responses	Operate as intended Lost function(s) shall be self-recoverable No degradation of performance No loss of stored data or user programmable functions

Where "operate as intended" or "no loss of function" is specified, the EUT shall demonstrate correct functioning.

Where the EUT has more than one mode of operation, an unplanned transition from one mode to another is considered as an unintentional response. The EUT shall be tested in sufficient modes to confirm there are no such unintentional responses.

• Continuous and non-continuous operation

Latency is the time delay between the initiation and the completion of operation of the EUT. Correct functioning requires completing the relevant operation within the maximum latency time.

Where the maximum latency is specified in the applicable harmonised radio standard (in the wanted performance criterion, or an acknowledge requirement), that value shall be used.

Where this is not the case, then the maximum latency is that required by the intended use of the EUT.

• Operating modes

Where the EUT has more than one mode of operation, an unplanned transition from one mode to another is considered as an unintentional response. The EUT shall be tested in all modes to confirm there are no such unintentional responses.

2.2 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Specification	Expanded Uncertainty (k=2) (±)	Maximum allowable uncertainty (±)
Radiated Emissions up to 1 GHz	30 MHz ~ 1 GHz	4.69 dB	6.3 dB (U_{CISPR})
Radiated Emissions above 1 GHz	1 GHz ~ 6 GHz	5.15 dB	5.2 dB (U_{CISPR})

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.3 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 Description of EUT

Product	Notecard
Brand	Blues Inc.
Test Model	NOTE-LWEU
Sample Status	Engineering sample
Operating Software	N/A
Power Supply Rating	3.3 Vdc
Accessory Device	Refer to Note as below
Data Cable Supplied	N/A

Note: The EUT uses following accessories.

CPU	
Brand	Model
STMicrosystems	STM32WL55CCU7

3.2 Primary Clock Frequencies of Internal Source

The highest frequency generated or used within the EUT or on which the EUT operates or tunes is 928 MHz, provided by Blues Inc., for detailed internal source, please refer to the manufacturer's specifications.

3.3 Features of EUT

The tests reported herein were performed according to the method specified by Blues Inc., for detailed feature description, please refer to the manufacturer's specifications or user's manual.

Please refer to appendix of the report if the applicant has provided additional descriptions of the EUT.

3.4 Operating Modes of EUT and Determination of Worst Case Operating Mode

The EUT has been pre-tested under following test modes.

Test Condition	
Mode	Radiated Emissions up to 1 GHz
1	869.525MHz link + 5 Vdc
Note: There are both standby mode and normal mode to be pre-tested then normal mode has the highest emission value.	

Test modes are presented in the report as below.

Test Condition	
Mode	Radiated Emissions up to 1 GHz
-	869.525MHz link + 5 Vdc
Mode	Radiated Emissions above 1 GHz
-	869.525MHz link + 5 Vdc
Mode	Electrostatic Discharges (ESD)
-	869.525MHz link + 5 Vdc
Mode	Radio Frequency Electromagnetic Field (RS)
-	869.525MHz link + 5 Vdc

3.5 Test Program Used and Operation Descriptions

For Emission test


- The EUT is powered by Adapter.
- Make the EUT generate a Tx signal through instructions.
- Use commands to make the peripheral Notedcard receiver EUT signals.

For Immunity test


- The EUT is connected to a Laptop, which acts as a communication partner via USB Cable.
- Make the EUT generate a Tx signal through instructions.
- Use commands to make the peripheral Notedcard receiver EUT signals.

3.6 Connection Diagram of EUT and Peripheral Devices


For Emission test

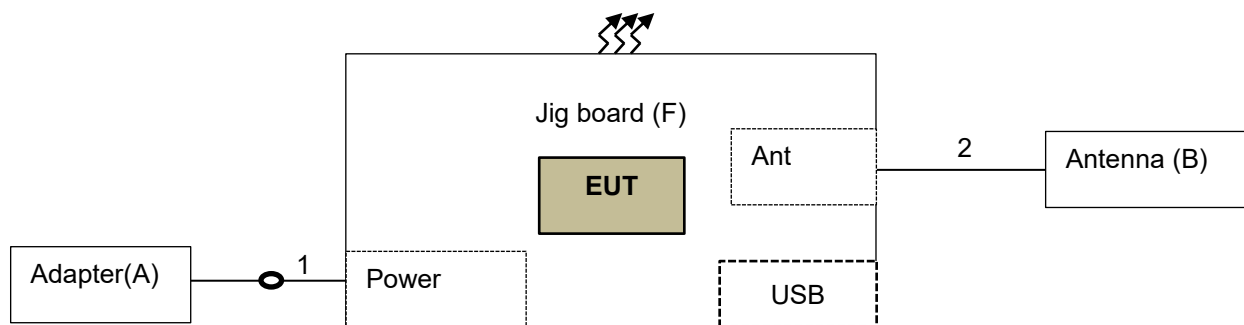

Remote Site



For Immunity test

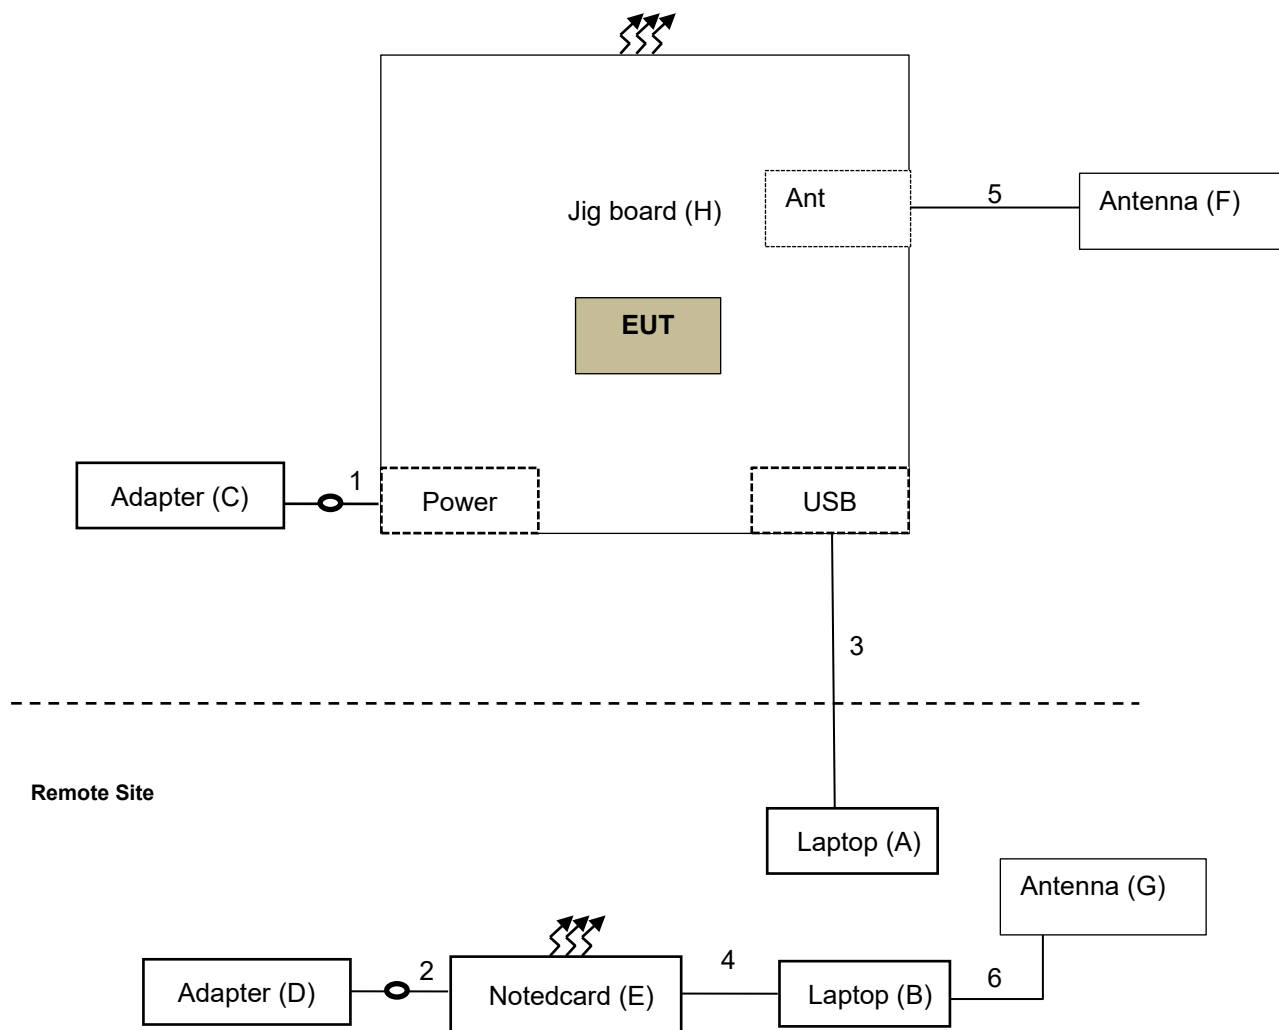

3.7 Configuration of Peripheral Devices and Cable Connections

For Emission test

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Adapter	PHIHONG	PSAA05K-050	N/A	N/A	Supplied by applicant
B	Antenna	Molex	211140-0100	N/A	N/A	Supplied by applicant
C	Notedcard	Blues Inc.	NOTE-LWEU	N/A	N/A	Supplied by applicant
D	Adapter	PHIHONG	PSAA05K-050	N/A	N/A	Supplied by applicant
E	Antenna	Molex	211140-0100	N/A	N/A	Supplied by applicant
F	Jig board	N/A	N/A	N/A	N/A	Supplied by applicant

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	Power Cable	1	0.2	No	0	Supplied by applicant
2	Antenna Cable	1	0.1	Yes	0	Supplied by applicant
3	Power Cable	1	0.2	No	0	Supplied by applicant
4	Antenna Cable	1	0.1	Yes	0	Supplied by applicant

For Immunity test

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Laptop	Lenove	X240	PC03VG1H	N/A	Provided by Lab
B	Laptop	Dell	Latitude E6440	25X1M12	N/A	Provided by Lab
C	Adapter	HP	PSC11C	N/A	N/A	Provided by Lab
D	Adapter	HP	PSC11C	N/A	N/A	Provided by Lab
E	Notedcard	Blues Inc.	NOTE-LWEU	N/A	N/A	Supplied by applicant
F	Antenna	Molex	211140-0100	N/A	N/A	Supplied by applicant
G	Antenna	Molex	211140-0100	N/A	N/A	Supplied by applicant
H	Jig board	N/A	N/A	N/A	N/A	Supplied by applicant

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	Power Cable	1	0.2	No	0	Supplied by applicant
2	Power Cable	1	0.2	No	0	Supplied by applicant
3	USB Cable	1	1	Yes	0	Provided by Lab
4	USB Cable	1	1	Yes	0	Provided by Lab
5	Antenna Cable	1	0.1	Yes	0	Supplied by applicant
6	Antenna Cable	1	0.1	Yes	0	Supplied by applicant

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 Radiated Emissions up to 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower (H)	MFA-440	970705	N/A	N/A
Antenna Tower (V)	MFA-440	9707	N/A	N/A
Bi_Log Antenna Schwarzbeck	VULB 9168	9168-148	2022/12/20	2023/12/19
		9168-156	2022/12/20	2023/12/19
Controller (H)	MF7802	08093	N/A	N/A
Controller (V)	MF7802	074	N/A	N/A
EMI Test Receiver R&S	ESR7	101264	2023/4/10	2024/4/9
		101471	2023/3/15	2024/3/14
Fixed Attenuator Mini-Circuits	UNAT-5+	PAD-CH(H)-01	2023/9/2	2024/9/1
		PAD-CH(V)-01	2023/9/2	2024/9/1
Preamplifier Sonoma	310N	352923	2023/5/7	2024/5/6
		352924	2023/5/7	2024/5/6
RF Coaxial Cable TIMES	LMR-600(11.8M)+LMR-400 (7M)	CABLE-CH1(HOR)-01	2023/9/2	2024/9/1
	LMR-600(18M)+LMR-400 (7M)	CABLE-CH1(VER)-01	2023/9/2	2024/9/1
Software	ADT_Radiated_V8.7.08	N/A	N/A	N/A
Turn Table	DS430	50303	N/A	N/A

Notes:

1. The test was performed in HY - 10M Chamber. The test site validated date: 2023/7/29 (NSA)
2. The VCCI Site Registration No. is R-11893.
3. Tested Date: 2023/11/8

4.2 Radiated Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower BVADT	AT100	AT93021702	N/A	N/A
Band Pass Filter Micro-Tronics	BRM17690-01	002	2023/9/2	2024/9/1
	BRM50716-01	G010	2023/9/2	2024/9/1
Boresight antenna tower fixture BV	BAF-02	3	N/A	N/A
Controller BVADT	SC100	SC93021702	N/A	N/A
Fixed Attenuator Mini-Circuits	BW-N4W5+	PAD-CH3-03	2023/7/8	2024/7/7
Horn Antenna ETS-Lindgren	3117	00034126	2023/10/18	2024/10/17
Horn Antenna Schwarzbeck	BBHA 9120D	209	2022/11/13	2023/11/12
Preamplifier Agilent	8449B	3008A02465	2023/2/15	2024/2/14
Preamplifier EMCI	EMC012645SE	980338	2023/5/7	2024/5/6
PXA Signal Analyzer Keysight	N9030B	MY60070562	2023/2/22	2024/2/21
RF Coaxial Cable HUBER+SUHNER&EMCI	SUCOFLEX 104&EMC104-SM-SM- 8000	Cable-CH3- 03(309224+170907)	2023/7/8	2024/7/7
Software BVADT	ADT_Radiated_V8.7.08	N/A	N/A	N/A
Turn Table BVADT	TT100	TT93021702	N/A	N/A

Notes:

1. The test was performed in HY - 966 Chamber 2. The test site validated date: 2023/4/29 (VSWR)
2. The VCCI Site Registration No. is G-20126.
3. Tested Date: 2023/11/9

4.3 Electrostatic Discharges (ESD)

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Electrostatic Analog Tester Noiseken	ESS-2002	ESS0442784	2022/12/16	2023/12/15
Electrostatic Analog Tester Schaffner	NSG-438	1326	2023/7/6	2024/7/5
Electrostatic Analog Tester TESEQ	NSG 438	1614	2023/7/27	2024/7/26
ESD Generator EM TEST	Dito	V0701102114	2022/11/11	2023/11/10
ESD Gun EM TEST	Dito	P2209261291 / P2206259188	2023/4/28	2024/4/27
ESD Simulator Noiseken	ESS-B3011A	ESS1694113	2023/7/29	2024/7/28

Notes:

1. The test was performed in HY - ESD 1.
2. Tested Date: 2023/11/7

4.4 Radio Frequency Electromagnetic Field (RS)

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Audio analyzer R&S	UPV	101009	2022/12/30	2023/12/29
Conditioning Amplifier B&K	Type 2690--0S2	2482371	2023/6/27	2024/6/26
Electric Field Probe ETS-Lindgren	HI-6105	00212757	2023/1/6	2024/1/5
Log Periodic Antenna R&S	HL046E	100114	N/A	N/A
Mouth Simulator B&K	4227	2411656	N/A	N/A
power amplifier BONN Elektronik	BLMA 1060-100/50D	118694	N/A	N/A
power amplifier R&S	BBA100	101011	N/A	N/A
Power Sensor Boonton	51011-EMC	33105	2023/7/14	2024/7/13
		33107	2023/7/14	2024/7/13
Power Sensor R&S	NRP-Z91	101572	2023/5/10	2024/5/9
		101573	2023/5/10	2024/5/9
Pressure-field Microphone B&K	4192-L-001	2764583	2022/11/23	2023/11/22
Signal Generator R&S	SMB100A	105801	2022/11/27	2023/11/26
Software R&S	EMC32 Version 8.52.0	N/A	N/A	N/A
Stacked Log Periodic Antenna Schwarzbeck	STLP 9149	9149-141	N/A	N/A

Notes:

1. The test was performed in HY - RS Chamber 2.
2. Tested Date: 2023/11/7

5 Limits of Test Items

5.1 Radiated Emissions up to 1 GHz

Frequency (MHz)	Class A Quasi-peak (dBuV/m)		Class B Quasi-peak (dBuV/m)	
	at 3m	at 10m	at 3m	at 10m
30 - 230	50	40	40	30
230 - 1000	57	47	47	37

- Notes:
1. The lower limit shall apply at the transition frequencies.
 2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

5.2 Radiated Emissions above 1 GHz

Frequency (GHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	Average	Peak	Average	Peak
1 to 3	56	76	50	70
3 to 6	60	80	54	74

- Notes:
1. The lower limit shall apply at the transition frequencies.
 2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

Frequency Range of Radiated Measurement (For unintentional radiators)

Highest internal frequency (F_x)	Highest measurement frequency (F_m) (GHz)
$F_x \leq 108 \text{ MHz}$	1
$108 \text{ MHz} < F_x \leq 500 \text{ MHz}$	2
$500 \text{ MHz} < F_x \leq 1 \text{ GHz}$	5
$F_x > 1 \text{ GHz}$	5 x F_x up to a maximum of 6 GHz

F_x is the highest fundamental frequency generated and/or used in the ITE or digital apparatus under test.

5.3 General immunity requirements

For EN 301 489-series


Port	Basic Standard	Test item	Test specification	Performance criteria
Enclosure	EN 61000-4-2	Electrostatic Discharge (ESD)	±4 kV (contact) ±8 kV (Air)	TP (B)
	EN 61000-4-3	Radio Frequency Electromagnetic Field (RS)	80 to 6000(MHz), 3 V/m, 80% AM (1 kHz)	CP (A)

6 Test Arrangements

6.1 Radiated Emissions up to 1 GHz

- For the table-top EUT is placed on a 0.8 meter to the top of rotating table; for the floor standing EUT shall be insulated (by insulation of maximum thickness of 150 mm) from the horizontal reference ground plane. The rotating table is rotated 360 degrees to determine the position of the highest radiation. If the equipment requires a dedicated ground connection, this shall be provided and bonded to the RGP.
- The EUT is set 10 meters away from the interference-receiving antenna, which is mounted on the top of a variable-height antenna tower.
- The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT is arranged to its worst case and then the antenna is tuned to heights from 1 m to 4 m and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system is set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is up to 1 GHz.

Note: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for quasi-peak detection (QP) at frequency up to 1GHz.

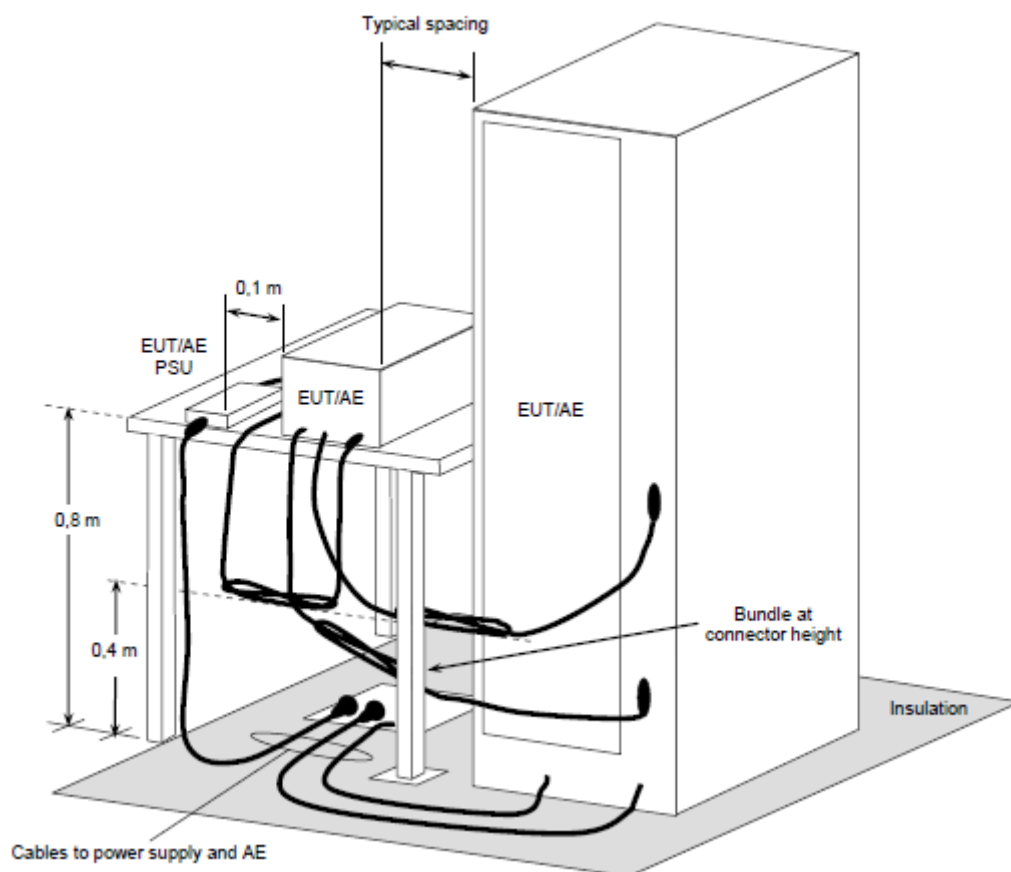


For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

6.2 Radiated Emissions above 1 GHz

- For the table-top EUT is placed on a 0.8 meter to the top of rotating table; for the floor standing EUT shall be insulated (by insulation of 12 mm) from the horizontal reference ground plane. The rotating table is rotated 360 degrees to determine the position of the highest radiation. If the equipment requires a dedicated ground connection, this shall be provided and bonded to the RGP.
- The EUT was set $d = 3$ meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna can be varied from one meter to four meters, the height of adjustment depends on the EUT height and the antenna 3dB beamwidth both, to detect the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The spectrum analyzer system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.

Note: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection (PK) at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz for Average detection (AV) at frequency above 1GHz.

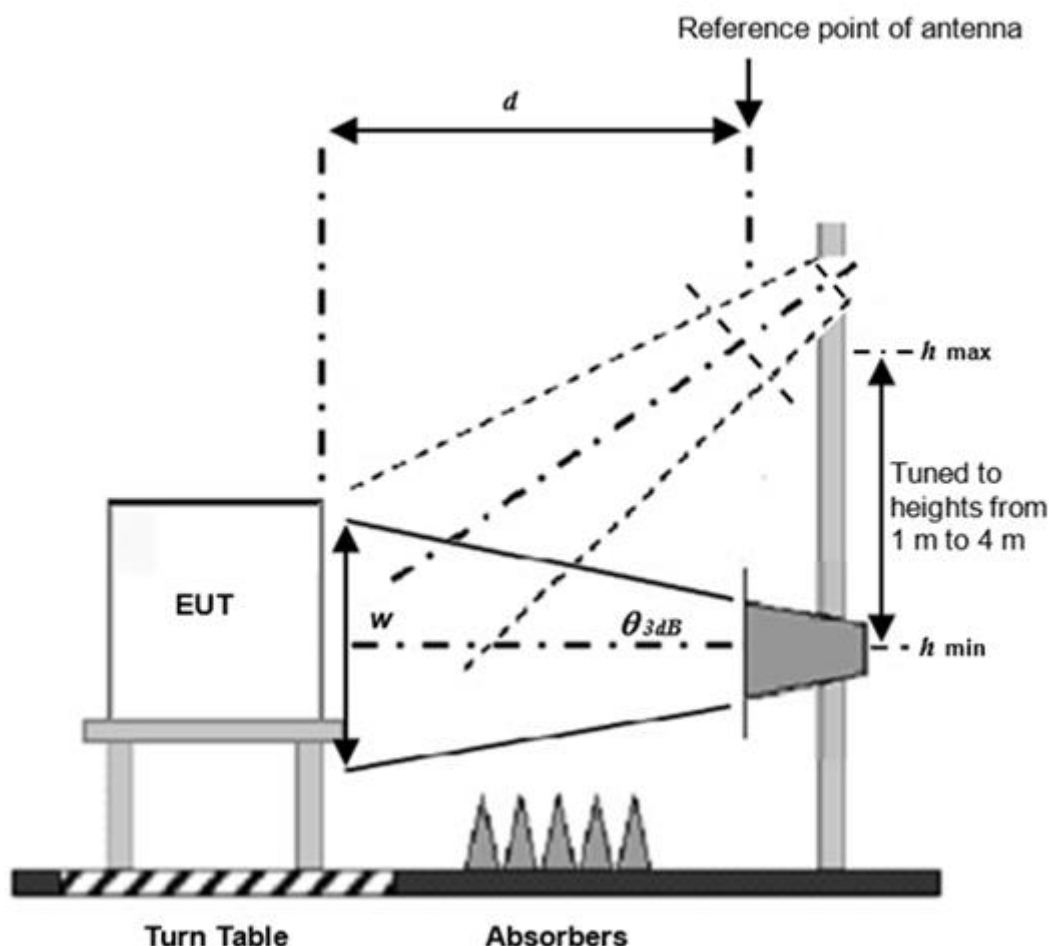


For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

6.3 Electrostatic Discharges (ESD)

Discharge Impedance:	330 ohm / 150 pF
Number of Discharge:	Air – Direct: 10 discharges per location (each polarity) Contact – Direct & Indirect: 10 discharges per location (each polarity)
Discharge Period:	1-second minimum

The basic test procedure was in accordance with EN/IEC 61000-4-2:

- Electrostatic discharges were applied only to those points and surfaces of the EUT that are accessible to users during normal operation.
- The test was performed with at least ten single discharges on the pre-selected points in the most sensitive polarity.
- The time interval between two successive single discharges was at least 1 second.
- The ESD generator was held perpendicularly to the surface to which the discharge was applied and the return cable was at least 0.2 meters from the EUT.
- Contact discharges were applied to the non-insulating coating, with the pointed tip of the generator penetrating the coating and contacting the conducting substrate.
- Air discharges were applied with the round discharge tip of the discharge electrode approaching the EUT as fast as possible (without causing mechanical damage) to touch the EUT. After each discharge, the ESD generator was removed from the EUT and re-triggered for a new single discharge. The test was repeated until all discharges were complete.
- At least ten single discharges (in the most sensitive polarity) were applied to the **Horizontal Coupling Plane** at points on each side of the EUT. The ESD generator was positioned at a distance of 0.1 meters from the EUT with the discharge electrode touching the **HCP**.
- At least ten single discharges (in the most sensitive polarity) were applied to the center of one vertical edge of the **Vertical Coupling Plane** in sufficiently different positions that the four faces of the EUT were completely illuminated. The **VCP** (dimensions 0.5m x 0.5m) was placed vertically to and 0.1 meters from the EUT.

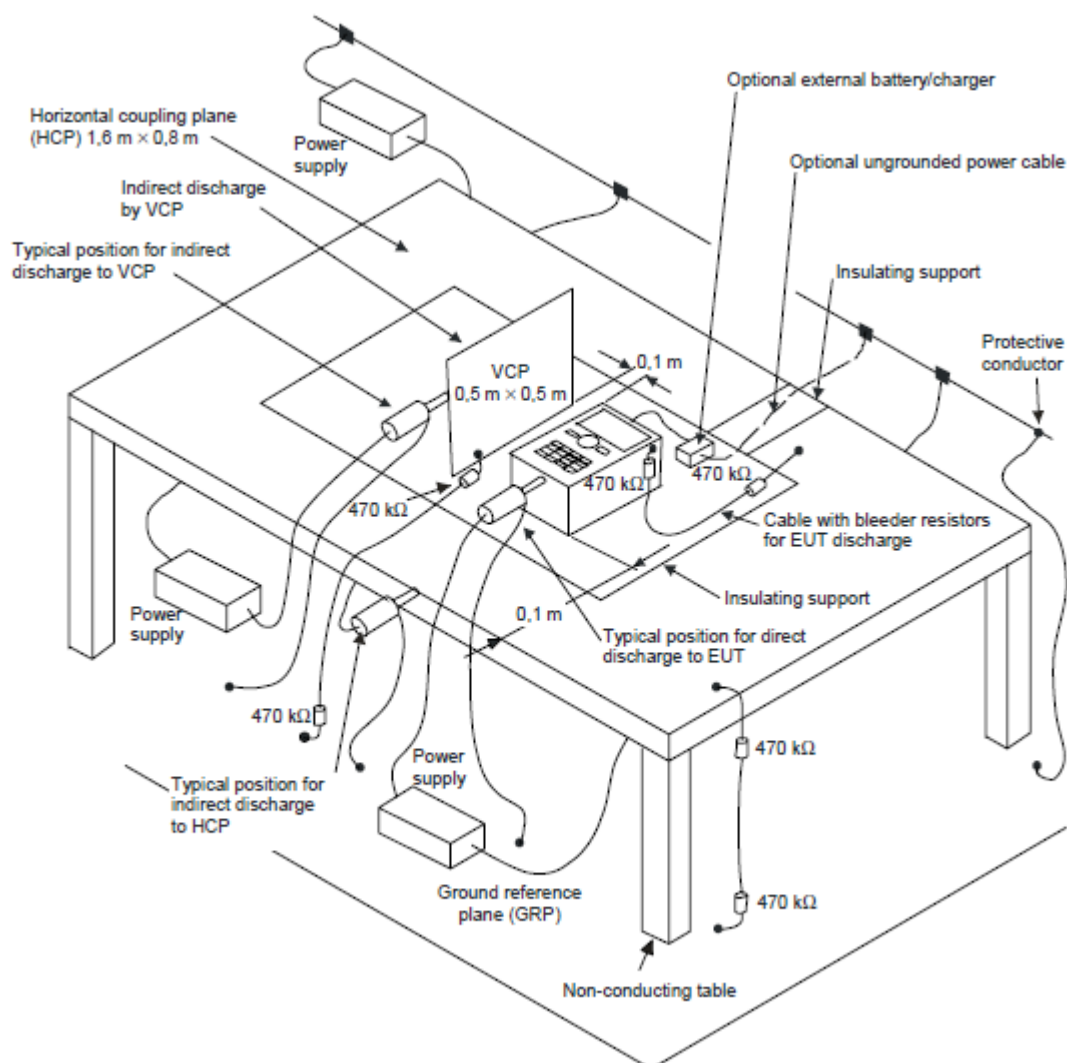

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

NOTE:

TABLE-TOP EQUIPMENT

The configuration consisted of a wooden table 0.8 meters high standing on the **Ground Reference Plane**. The **GRP** consisted of a sheet of aluminum at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system. A **Horizontal Coupling Plane** (1.6m x 0.8m) was placed on the table and attached to the **GRP** by means of a cable with 940kΩ total impedance. The equipment under test, was installed in a representative system as described in section 7 of EN/IEC 61000-4-2, and its cables were placed on the **HCP** and isolated by an insulating support of 0.5mm thickness. A distance of 1-meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.

FLOOR-STANDING EQUIPMENT


The equipment under test was installed in a representative system as described in section 7 of IEC 61000-4-2, and its cables were isolated from the Ground Reference Plane by an insulating support of 0.1-meter thickness. The GRP consisted of a sheet of aluminum that is at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system and extended at least 0.5 m.

6.4 Radio Frequency Electromagnetic Field (RS)

Modulation:	1kHz Sine Wave, 80%, AM Modulation
Frequency Step:	1 % of preceding frequency value
Dwell Time:	3 seconds

The test procedure was in accordance with EN/IEC 61000-4-3.

- The testing was performed in a modified semi-anechoic chamber.
- The frequency range shall be swept, with the signal 80% amplitude modulated with a 1kHz sine wave.
- The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.

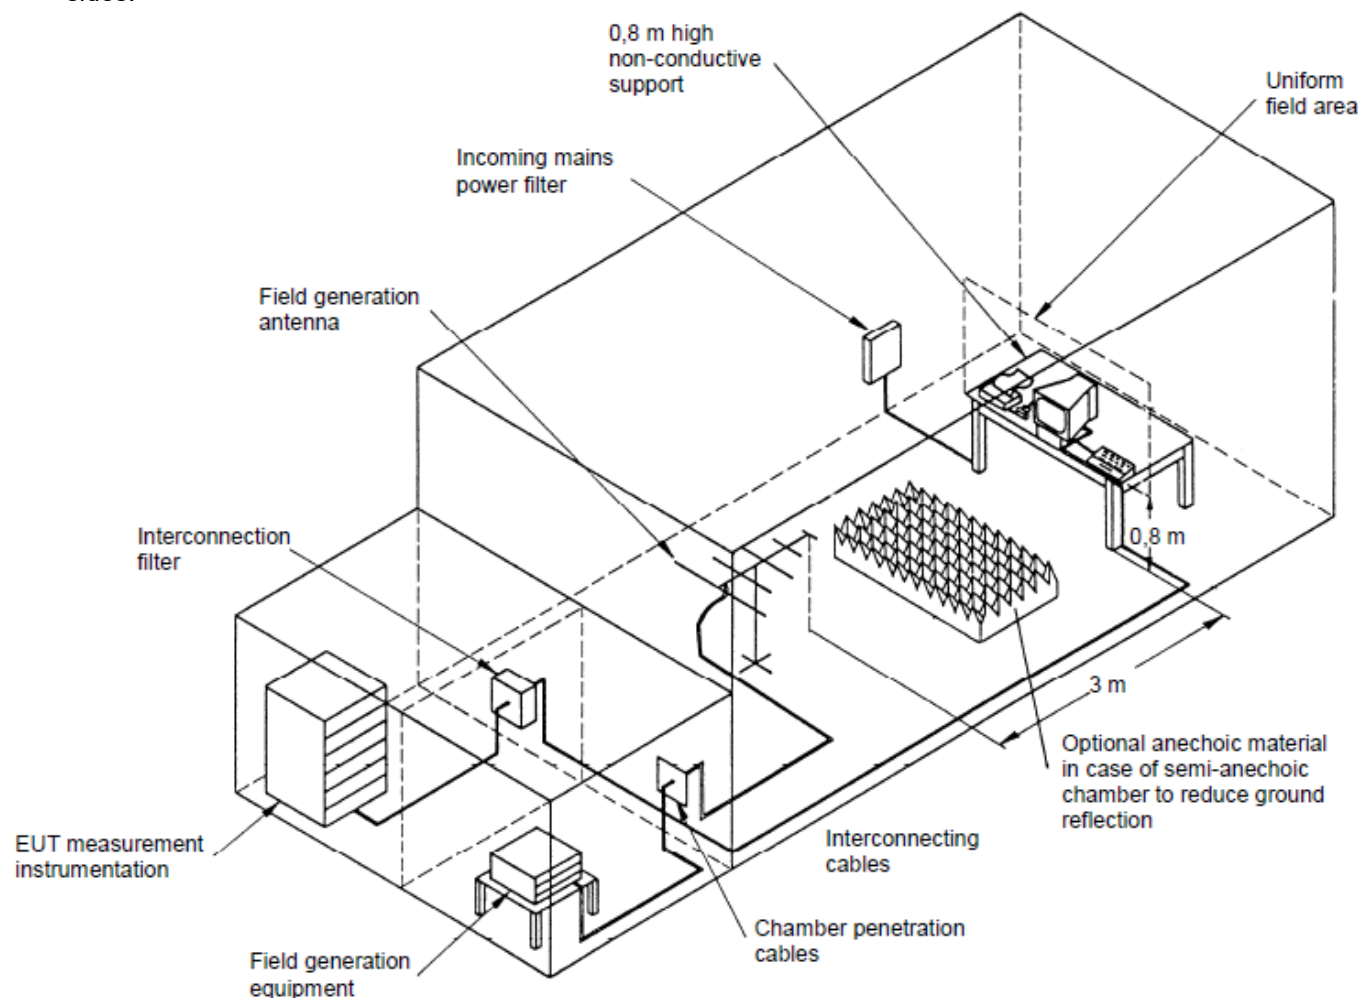

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

NOTE:

TABLETOP EQUIPMENT

The EUT installed in a representative system as described in section 7 of EN/IEC 61000-4-3 was placed on a non-conductive table 0.8 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

FLOOR STANDING EQUIPMENT

The EUT installed in a representative system as described in section 7 of EN/IEC 61000-4-3 was placed on a non-conductive wood support 0.1 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

7 Test Results of Test Item


7.1 Radiated Emissions up to 1 GHz

Frequency Range	30 MHz ~ 1 GHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP), 120 kHz
Tested By	Brian Kuo	Environmental Conditions	22°C, 71% RH

Antenna Polarity & Test Distance : Horizontal at 10 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	50.40	17.20 QP	30.00	-12.80	2.40 H	161	29.30	-12.10
2	154.84	15.13 QP	30.00	-14.87	2.40 H	1	28.06	-12.93
3	489.07	23.40 QP	37.00	-13.60	2.00 H	306	31.10	-7.70
4	597.77	25.45 QP	37.00	-11.55	1.40 H	169	30.76	-5.31
5	747.90	26.26 QP	37.00	-10.74	4.00 H	157	28.84	-2.58
6	993.89	32.99 QP	37.00	-4.01	3.00 H	146	31.09	1.90

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
– Pre-Amplifier Factor (dB)
3. Margin value = Emission level – Limit value
4. The other emission levels were very low against the limit.

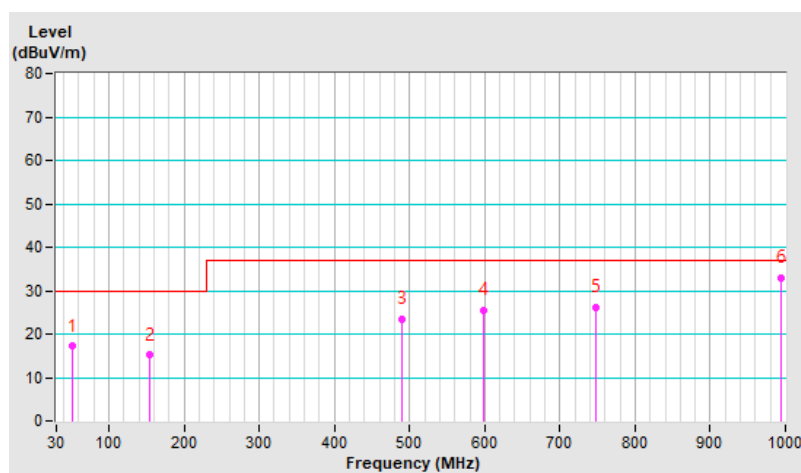


Frequency Range	30 MHz ~ 1 GHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP), 120 kHz
Tested By	Brian Kuo	Environmental Conditions	22°C, 71% RH

Antenna Polarity & Test Distance : Vertical at 10 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	41.58	22.61 QP	30.00	-7.39	3.00 V	112	35.87	-13.26
2	60.26	19.30 QP	30.00	-10.70	1.50 V	342	32.32	-13.02
3	181.58	20.53 QP	30.00	-9.47	1.00 V	150	35.50	-14.97
4	738.88	29.38 QP	37.00	-7.62	1.00 V	359	32.03	-2.65
5	959.39	29.75 QP	37.00	-7.25	1.00 V	168	28.07	1.68
6	997.64	30.05 QP	37.00	-6.95	1.00 V	110	27.90	2.15

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
– Pre-Amplifier Factor (dB)
3. Margin value = Emission level – Limit value
4. The other emission levels were very low against the limit.

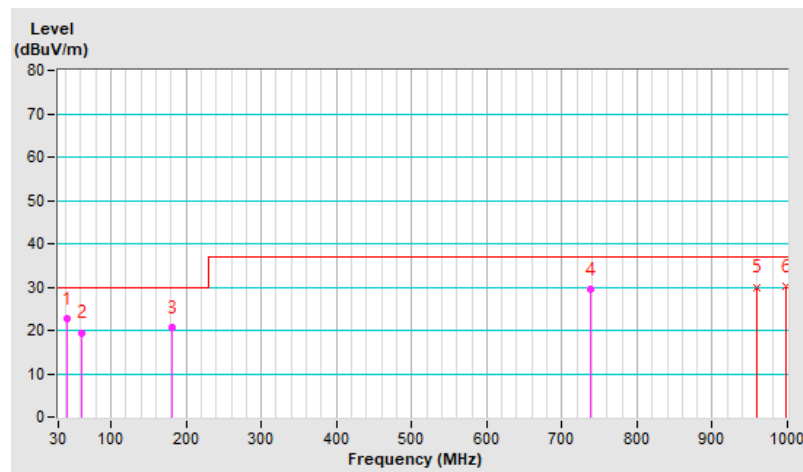


7.2 Radiated Emissions above 1 GHz

Frequency Range	1 GHz ~ 6 GHz	Detector Function & Resolution Bandwidth	Peak (PK) / Average (AV), 1MHz
Tested By	Nick Wu	Environmental Conditions	23°C, 73% RH

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1000.44	50.33 PK	70.00	-19.67	1.00 H	1	53.08	-2.75
2	1000.44	40.23 AV	50.00	-9.77	1.00 H	1	42.98	-2.75
3	1739.00	58.10 PK	70.00	-11.90	1.63 H	156	60.45	-2.35
4	1739.00	35.43 AV	50.00	-14.57	1.63 H	156	37.78	-2.35
5	2608.58	54.33 PK	70.00	-15.67	1.24 H	178	53.59	0.74
6	2608.58	42.33 AV	50.00	-7.67	1.24 H	178	41.59	0.74
7	3478.09	52.56 PK	74.00	-21.44	1.56 H	259	49.84	2.72
8	3478.09	31.57 AV	54.00	-22.43	1.56 H	259	28.85	2.72
9	3807.95	45.86 PK	74.00	-28.14	1.65 H	204	41.80	4.06
10	3807.95	32.23 AV	54.00	-21.77	1.65 H	204	28.17	4.06
11	4347.42	59.88 PK	74.00	-14.12	1.00 H	192	54.28	5.60
12	4347.42	33.98 AV	54.00	-20.02	1.00 H	192	28.38	5.60

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
– Pre-Amplifier Factor (dB)
3. Margin value = Emission level – Limit value
4. The other emission levels were very low against the limit.

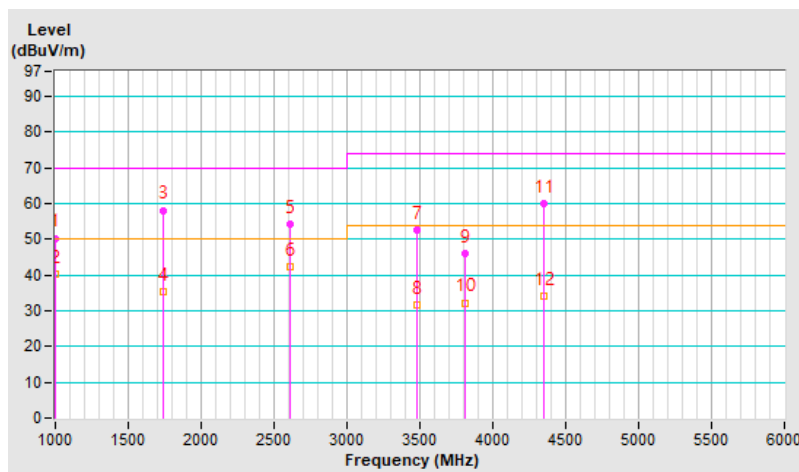


Frequency Range	1 GHz ~ 6 GHz	Detector Function & Resolution Bandwidth	Peak (PK) / Average (AV), 1MHz
Tested By	Nick Wu	Environmental Conditions	23°C, 73% RH

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1001.39	45.09 PK	70.00	-24.91	1.25 V	99	47.84	-2.75
2	1001.39	38.09 AV	50.00	-11.91	1.25 V	99	40.84	-2.75
3	1739.01	58.77 PK	70.00	-11.23	1.47 V	51	61.12	-2.35
4	1739.01	35.65 AV	50.00	-14.35	1.47 V	51	38.00	-2.35
5	2608.50	60.46 PK	70.00	-9.54	1.66 V	99	59.72	0.74
6	2608.50	31.25 AV	50.00	-18.75	1.66 V	99	30.51	0.74
7	3478.04	54.56 PK	74.00	-19.44	1.82 V	166	51.84	2.72
8	3478.04	35.87 AV	54.00	-18.13	1.82 V	166	33.15	2.72
9	3876.14	45.74 PK	74.00	-28.26	1.00 V	339	41.30	4.44
10	3876.14	32.60 AV	54.00	-21.40	1.00 V	339	28.16	4.44
11	4347.50	59.45 PK	74.00	-14.55	1.46 V	120	53.85	5.60
12	4347.50	34.05 AV	54.00	-19.95	1.46 V	120	28.45	5.60

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
– Pre-Amplifier Factor (dB)
3. Margin value = Emission level – Limit value
4. The other emission levels were very low against the limit.

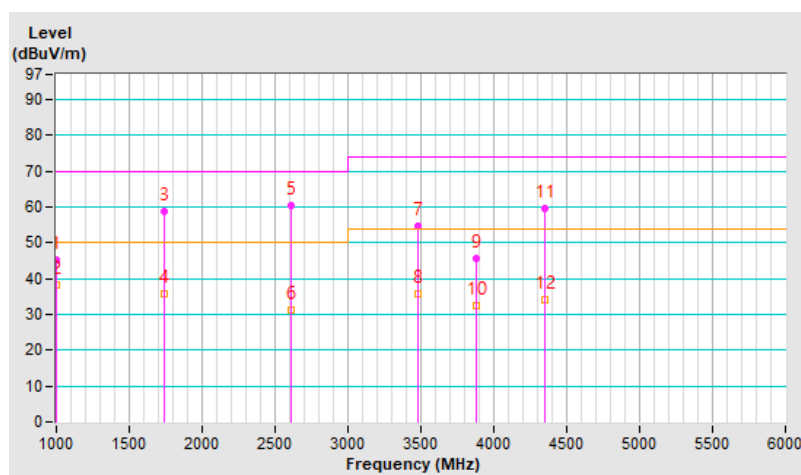

7.3 Electrostatic Discharges (ESD)

For EN 301 489

Input Power	DC 5V	Environmental conditions	23 °C, 45 % RH 986 mbar
Tested by	Matt Lan		

Test Results of Indirect Application					
Discharge Level (kV)	Polarity (+/-)	Test Point	Horizontal Coupling Plane	Vertical Coupling Plane	Performance Criteria
2,4	+/-	Four Side	Note	Note	A

Description of test points of indirect application:

1. Front side 2. Rear side 3. Right side 4. Left side

Note: The EUT is operated normal during the test.

7.4 Radio Frequency Electromagnetic Field (RS)

For EN 301 489

Input Power	DC 5V	Environmental conditions	22 °C, 58 % RH 986 mbar
Tested by	Matt Lan		



Frequency (MHz)	Polarity	Azimuth(°)	Applied Field Strength		Observation	Performance Criteria
			(V/m)	Modulation		
80 - 6000	V&H	0 , 90 , 180 , 270	3	80% AM (1kHz)	Note*	A

Note: The EUT is operated normal during the test.



* The exclusion band for the transmitter and / or receiver function under test shall extend from 854.525MHz to 884.525MHz.

8 Pictures of Test Arrangements

8.1 Radiated Emissions up to 1 GHz

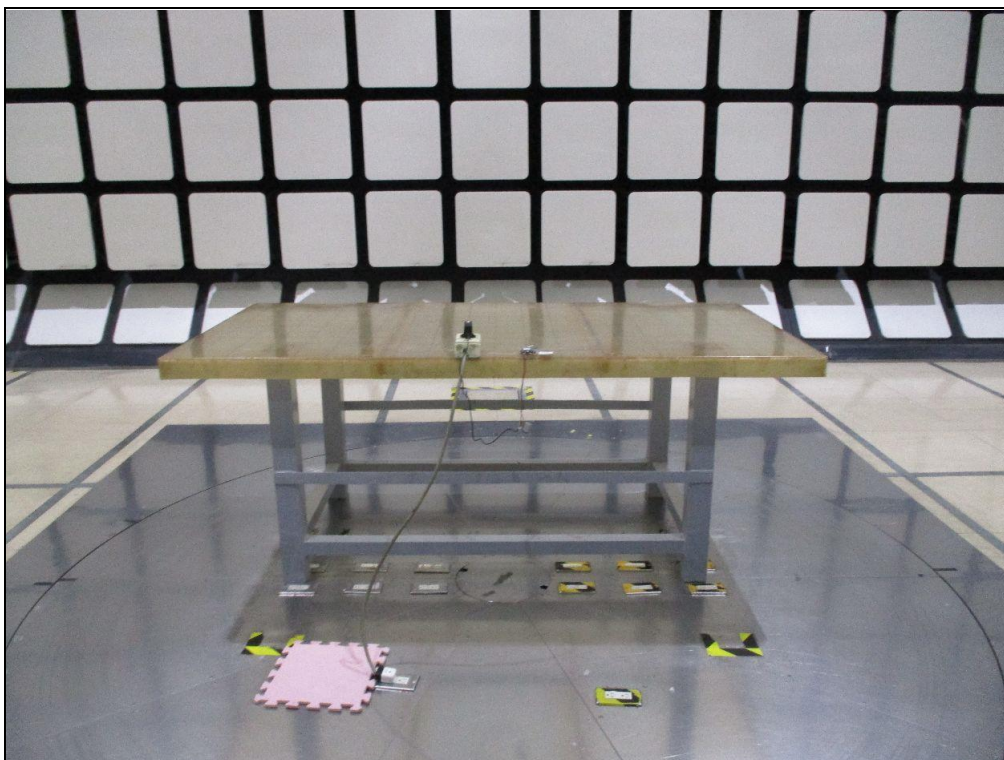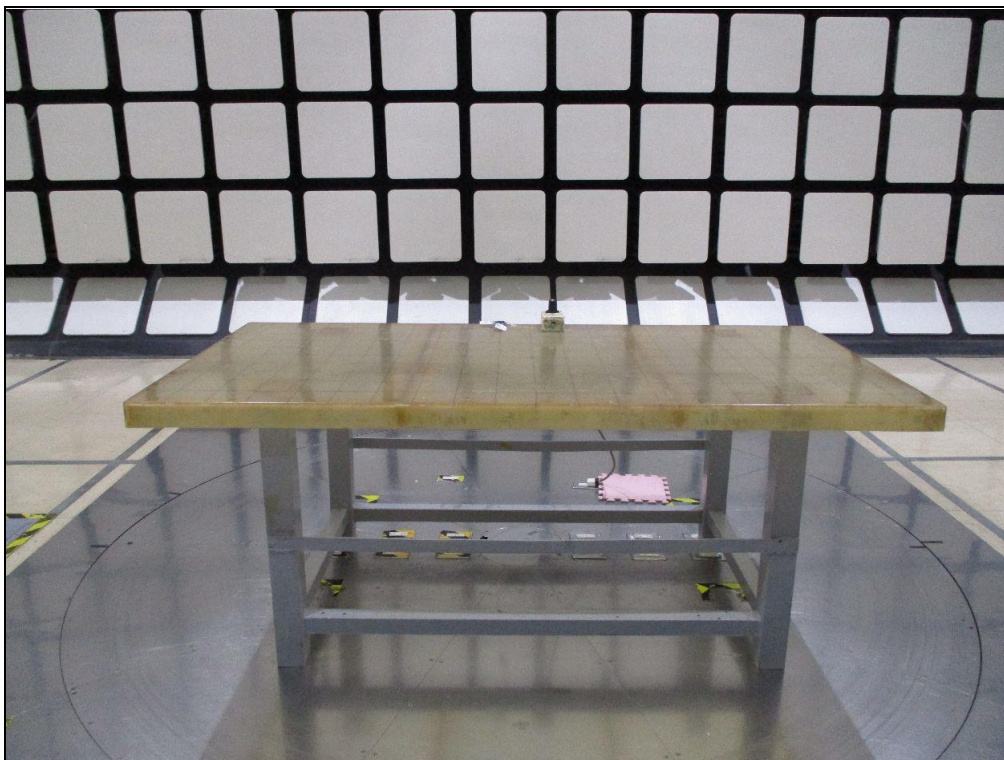


8.2 Radiated Emissions above 1 GHz

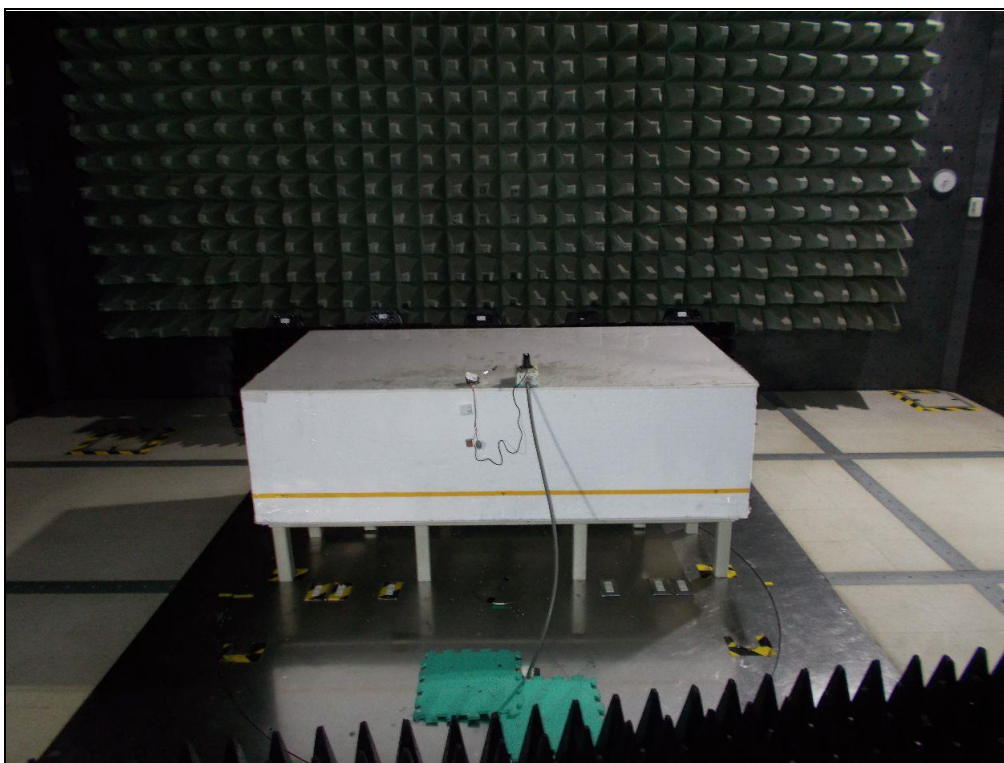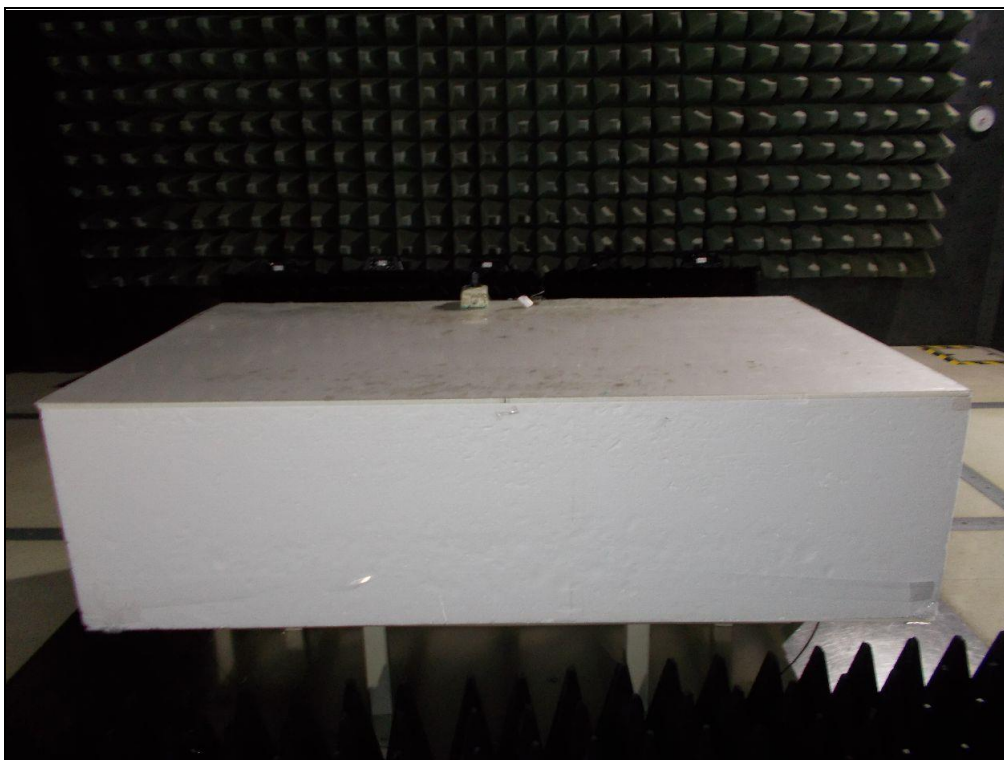

8.3 Electrostatic Discharges (ESD)



8.4 Radio Frequency Electromagnetic Field (RS)

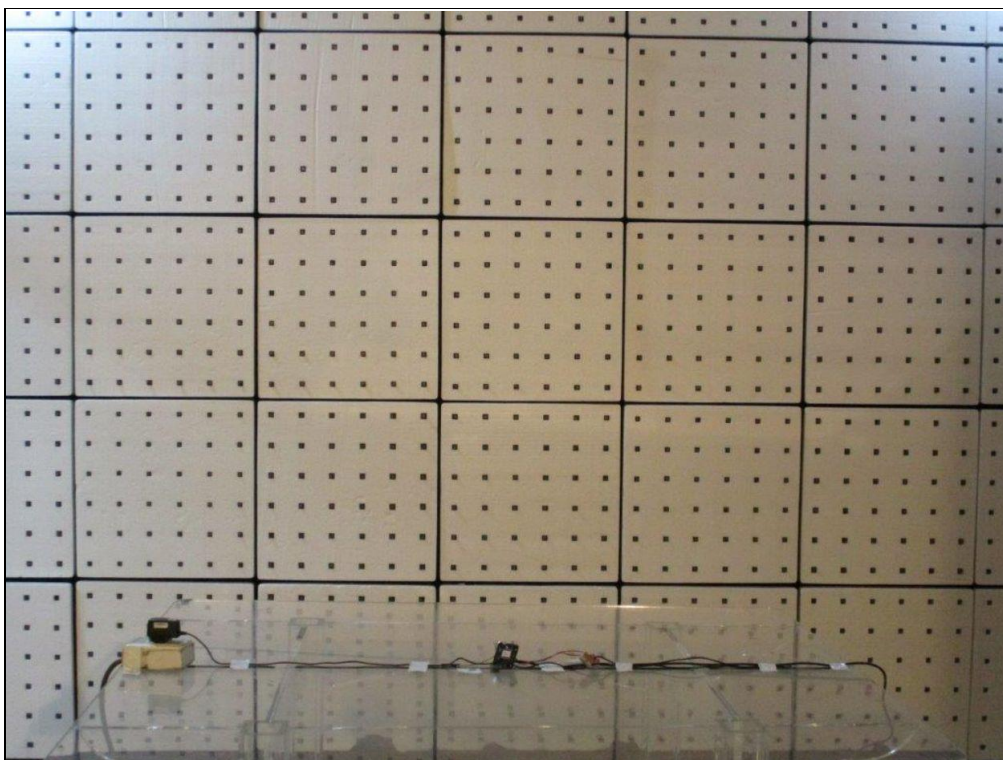

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---