

Test report

Number T251-0373/25

Project file: C20250741

Date: 2025-05-22

Pages: 28

Product: Notecard

Type reference: NOTE-MBNAW

Ratings: VIO - 1.8 V or 3.3 V; 150 mA
VMODEM - 2.5 V to 5.5 V; 750 mA
(powered directly from a development board and AC/DC power supply delivering 5 V d.c. to the board)

Trademark: /

Applicant: Blues Inc.
Harbor Street 50, 01944 Manchester, USA

Manufacturer: Blues Inc.
Harbor Street 50, 01944 Manchester, USA

Place of manufacture: /

Summary of testing

Testing method: 47 CFR Part 15, Subpart B (Clause 15.107 and 15.109) last amended 2025-01-06 in conjunction with ANSI C63.4:2014
ICES-003, issue 7 in conjunction with ICES-Gen, Issue 2 and ANSI C63.4:2014 amended as per ANSI C63.4a:2017

Testing location: SIQ Ljubljana
Mašera-Spasičeva ulica 10, SI-1000 Ljubljana, Slovenia
FCC designation number: SI0001
ISED Conformity Assessment Body Identification Number: SI0001

Remarks: Date of receipt of test items: 2025-03-19
Number of items tested: 1
Date of performance of tests: 2025-03-25 – 2025-03-25
The test results presented in this report relate only to the items tested.
The test items were tested in the condition as received.
The product complies with the requirements of the testing methods.

Tested by: Aljaž Bajec

Approved by: Marjan Mak

The report shall not be reproduced except in full.

Contents	Page
1. GENERAL	3
2. MEASUREMENT UNCERTAINTY	4
3. DECISION RULE	5
4. PRODUCT SPECIFIC DATA	6
5. EQUIPMENT UNDER TEST (EUT)	8
6. TESTING SUMMARY SECTION	9
7. ENVIRONMENTAL CONDITIONS	10
8. LIMITS	11
8.1 CONDUCTED EMISSION LIMITS	11
8.2 RADIATED EMISSION LIMITS	12
9. TEST RESULTS	14
9.1 CONDUCTED EMISSION MEASUREMENT	14
9.2 RADIATED EMISSION MEASUREMENT	18
10. USED TEST EQUIPMENT	28

1. General

Abbreviations and markings:

Port	Physical interface through which electromagnetic energy enters or leaves the EUT
AE associated equipment	Equipment needed to exercise and/or monitor the operation of the EUT
EUT	Equipment Under Test
Highest internal frequency (F_x)	Highest fundamental frequency generated or used within the EUT or highest frequency at which it operates
RF	Radio Frequency

Possible test case verdicts:

Test does not apply to the tested sample:	N/A
Tested sample passed the requirements:	P (Pass)
Tested sample failed the requirements:	F (Fail)
Test was not performed:	N/P (Not performed)

Throughout this report a comma is used as the decimal separator. Numerical data taken from IEC standards are using a comma as the decimal separator.

History sheet:

Date:	Report No.:	Change:	Revision:
2025-05-22	T251-0373/25	Initial Test Report issued.	--

2. Measurement uncertainty

The following measurement uncertainty levels have been calculated according to the SIQ internal document EN208, as specified in CISPR 16-4-2 and EN 55016-4-2. The uncertainties represent an expanded uncertainty expressed at 95% confidence level using a coverage factor $k=2$.

The following measurement uncertainty has been included in test results as specified in each of the basic referenced standards as applicable.


Measurement / test method	U_{LAB}	U_{CISPR}
Conducted emission measurement (150 kHz to 30 MHz)	2,7 dB	3,4 dB
Radiated emission measurement (electric field strength at an OATS or in a SAC) - (30 MHz to 1000 MHz)	5,3 dB	6,3 dB
Radiated disturbance (electric field strength in a FAR) – (1-6 GHz)	4.4	5.2
Radiated disturbance (electric field strength in a FAR) – (6-18 GHz)	5.2	5.5
Radiated disturbance (electric field strength in a FAR) – (18-26 GHz)	5.0	N/A
Radiated disturbance (electric field strength in a FAR) – (26-40 GHz)	5.7	N/A

3. Decision rule

Application of decision rule and statement of conformity is defined in document TN023 Decision rule and measurement uncertainty.

As a general rule Pass/Fail decisions are based on simple acceptance rule and acceptance limits chosen based on simple acceptance ($w = 0$, $AL = TL$) except if a decision rule is governed by particular standard or guidance document.

Decision rule applicable for emission:

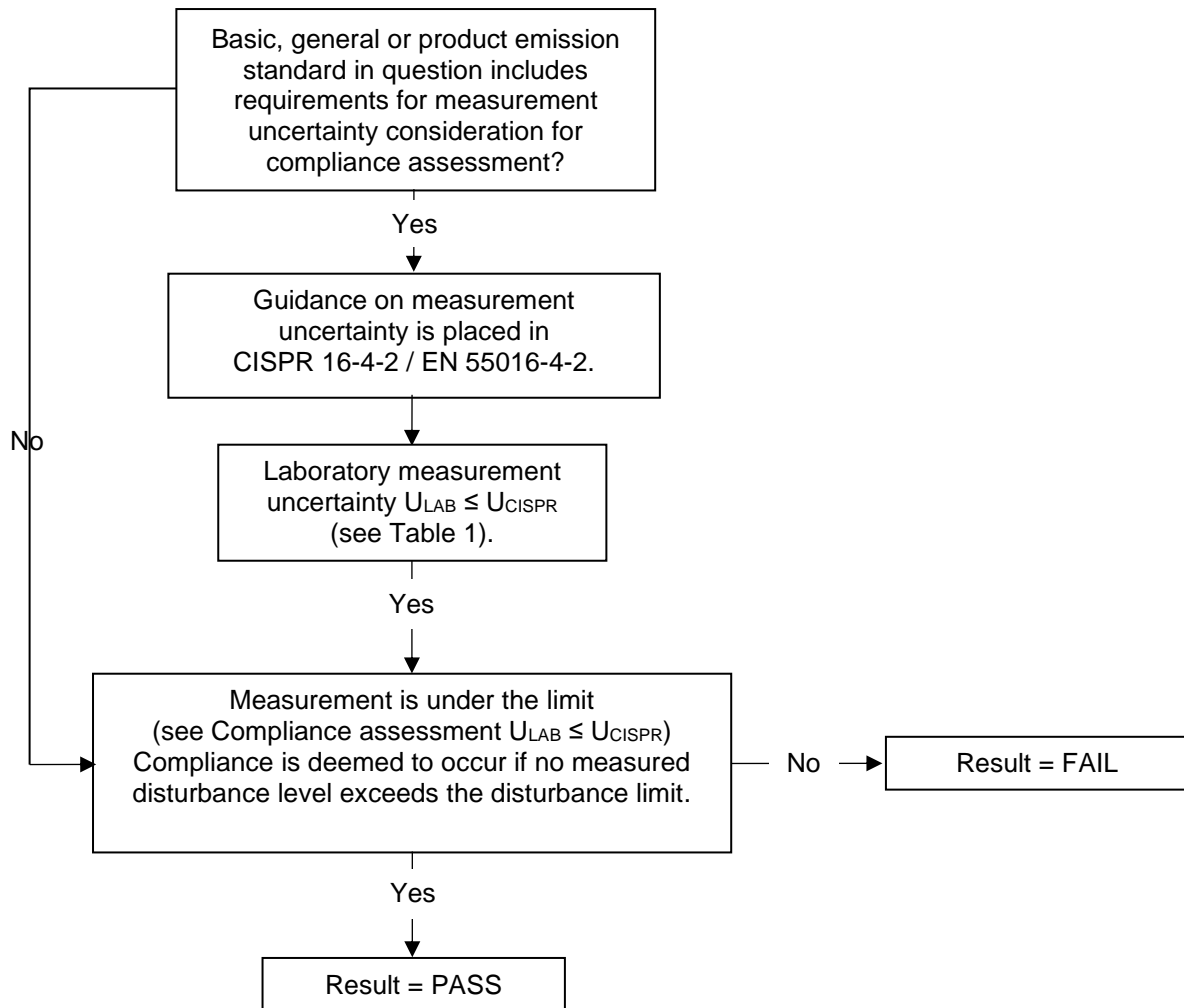

4. Product specific data

General description of test item:

The device is a data-pump to be built into other Devices. It features LTE and WiFi connectivity.

Product key:

NOTE-MBNAW contains Quectel EG915Q-NA LTE module and SiLabs WFM200S Wi-Fi module.

Power supply type:	Powered with AC/DC power supply and 5 V d.c. from the development board		
Contains FCC ID:	Quectel EG915Q-NA: XMR2023EG915QNA SiLabs WFM200S: QQQWFM200		
Contains IC:	Quectel EG915Q-NA: 10224A-023EG915QNA SiLabs WFM200S: 5123A-WFM200		
ICES category equipment	Category II		
Hardware version:	2.4		
Firmware/software version:	7		
Mounting position:	<input checked="" type="checkbox"/>	Table-top equipment:	
	<input type="checkbox"/>	Floor-standing equipment:	
	<input type="checkbox"/>	Wall/ceiling mounted equipment:	
	<input type="checkbox"/>	Hand-held equipment:	
	<input type="checkbox"/>	Other:	
Highest Internal Operating Frequencies:	Name:	WiFi module:	Frequency:
	Maximum clock transmission frequency that of the WiFi module	SiLabs WFM200S	2494 MHz

Port(s):

Port No.	Name	Type	Cable Length / m	Cable Shielded
0	Enclosure	N/E	/	/
1	AC power supply	AC	/	/
Note:	AC = AC mains power port DC = DC power port of the EUT I/O = Signal/control port WNP = wired network port GND = grounding N/E = Non-Electrical			

Configuration diagram:

/

Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

Information to the user acc. to 47 CFR Part 15, Subpart B:

Clause	Requirement	Result - Remark	Verdict
§ 15.105	Information to the user		
15.105 (a)	For a Class A digital device or peripheral, the instructions furnished the user shall include the statement specified in 15.105 (a), placed in a prominent location in the text of the manual.	Not Class A digital device.	N/A
15.105 (b)	For a Class B digital device or peripheral, the instructions furnished the user shall include the statement specified in 15.105 (b), placed in a prominent location in the text of the manual.	Class B digital device. The product is not an end device and is only supplied with the final product it is intended to charge.	P

The Class A statement cautions that operation of the device in a residential area is likely to cause harmful interference.

The Class B statement offers several suggestions for minimizing interference to radio or TV receivers. including reorienting the receiving antenna and moving the Class B device farther away from the receiver.

Labelling and user manual requirements acc. to ICES-003 issue 7:


Clause	Requirement	Result - Remark	Verdict
4.2	Labelling and user manual requirements		
	ISED compliance label specified below shall be placed on the marking plate or manual: CAN ICES-003(*) / NMB-003(*) * Insert either "A" or "B", but not both, to identify the applicable Class of the device used for compliance verification.	Acc. to clause 1.2.2 external power supplies marketed together with end ITE equipment need not be labelled as specified in 4.2. The labelling requirement is normative for the ITE or digital apparatus itself, but optional for the external power supply/converter that is marketed together with that ITE or digital apparatus	P

NOTE: The information in this section has been provided by the applicant.

5. Equipment under test (EUT)

Product Type	Device	Manufacturer	Model No.	Comments
EUT	Notecard	Blues Inc.	NOTE-MBNAW	/
AE	Development board	/	NOTECARRIER – D V1.6	/
AE	Power supply	Rigol	DP832	/
Note: EUT = Equipment Under Test AE = Associated Equipment				

Pictures of EUT:

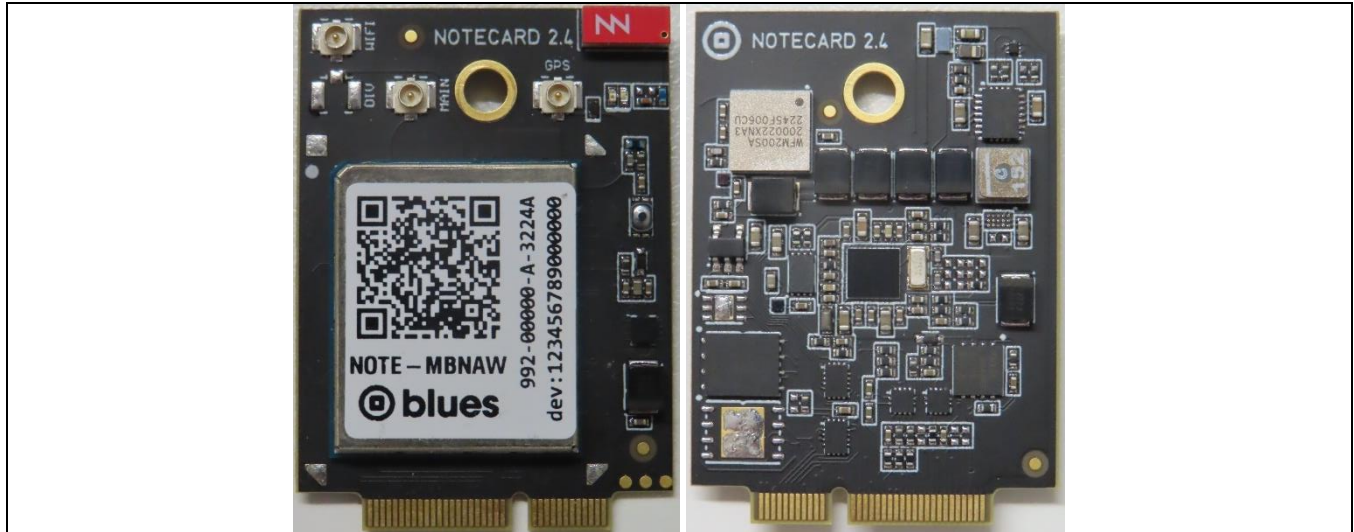

Pictures of associated equipment:

See pictures of test setups

Operating conditions:

Clause	Test	Connection type	Operating conditions
9.1	Conducted emission measurement	Single phase	120 V; 60 Hz supplied to AC/DC power supply with 5 V d.c. to the development board
9.2	Radiated emission measurement	Single phase	120 V; 60 Hz supplied to AC/DC power supply with 5 V d.c. to the development board

Operating modes:

No.	Operating mode
1	Wi-Fi mode is achieved by pressing button on NOTECARD.

Tested sample:

Sample number	Used for measurement
S202501652	All measurements

6. Testing summary section

STANDARDS (details on first page)	PERFORMED ¹⁾	CONCLUSION ¹⁾
47 CFR Part 15, Subpart B	YES	P
ICES-003	YES	P
¹⁾ See details in table(s) below		

Referenced standard:	47 CFR Part 15, Subpart B (Clause 15.107) in conjunction with ANSI C63.4:2014			
Test (emission)	Clause within standard	Clause within the report	Class	Conclusion
Conducted emission measurement	Clause 15.107 of 47 CFR Part 15	9.1	B	P
Radiated emission measurement	Clause 15.109 of 47 CFR Part 15	9.2	B	P

Referenced standard:	ICES-003, issue 7 in conjunction with ICES-Gen, Issue 2 and ANSI C63.4:2014 amended as per ANSI C63.4a-2017			
Test (emission)	Clause within standard	Clause within the report	Class	Conclusion
Conducted emission measurement	Clause 3.2.1 of ICES-003	9.1	B	P
Radiated emission measurement	Clause 3.2.2 of ICES-003	9.2	B	P

NOTE: no non-standard test method used

7. Environmental conditions

The climatic conditions during the tests were within the following limits:

Ambient temperature: 15 °C to 35 °C

Relative humidity: 15 % to 75 %

Atmospheric pressure: 860 mbar to 1060 mbar

8. LIMITS

8.1 Conducted emission limits

8.1.1 Limits according to 47 CFR Part 15.107 and ICES-003

CLASS B limits:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.5	66 – 56*	56 – 46*
0.5 to 5.0	56	46
5.0 to 30.0	60	50

* Decreases with the logarithm of the frequency.

CLASS A limits:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.5	79	66
0.5 to 30.0	73	60

8.2 Radiated emission limits

8.2.1 Required highest measurement frequency for radiated emissions:

Highest internal frequency (F_x)	Highest measurements frequency (F_M)
$F_x \leq 108$ MHz	1 GHz
$108 \text{ MHz} < F_x \leq 500$ MHz	2 GHz
$500 \text{ MHz} < F_x \leq 1$ GHz	5 GHz
$F_x > 1$ GHz	5 x F_x up to a maximum of 40 GHz

8.2.2 Limits according to 47 CFR Part 15.107

CLASS B limits:

Frequency Range (MHz)	Limits (dB μ V/m)	
	3 m distance	
30 to 88	40	Quasi Peak
88 to 216	43.5	
216 to 960	46	
960 to 1000	54	
above 1000	54	Average
above 1000	74	Peak

CLASS A limits:

Frequency Range (MHz)	Limits (dB μ V/m)	
	10 m distance	
30 to 88	39.1	Quasi Peak
88 to 216	43.5	
216 to 960	46.4	
960 to 1000	49.5	
above 1000	49.5	Average
above 1000	69.5	Peak

8.2.3 Limits according to ICES-003

Frequency range 30 MHz – 1 GHz:

Frequency Range (MHz)	Class A		Class B	
	3 m distance Quasi-peak (dB μ V/m)	10 m distance Quasi-peak (dB μ V/m)	3 m distance Quasi-peak (dB μ V/m)	10 m distance Quasi-peak (dB μ V/m)
30 - 88	50.0	40.0	40.0	30.0
88 - 216	54.0	43.5	43.5	33.1
216 - 230	56.9	46.4	46.0	35.6
230 - 960	57.0	47.0	47.0	37.0
960 - 1000	60.0	49.5	54.0	43.5

Frequency range at and above 1 GHz; 3 m distance:

Frequency range (GHz)	Class A		Class B	
	Average dB(μ V/m)	Peak dB(μ V/m)	Average dB(μ V/m)	Peak dB(μ V/m)
1 - F _M	60	80	54	74

9. Test results

9.1 Conducted emission measurement

9.1.1 Test procedure


- **For equipment tested as table-top:**
The EUT is placed on a non-conductive 0.8 meters high table, 0.4 meters from the vertical conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). LISN provide 50 Ohm / 50 μ H + 5 Ohm of coupling impedance for the measuring instrument.
- **For equipment tested as floor-standing:**
The EUT is placed on a non-conductive 0.1 meters high support, 0.4 meters from the vertical conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). LISN provide 50 Ohm / 50 μ H + 5 Ohm of coupling impedance for the measuring instrument.
- Sufficient time for the EUT, support equipment, and test equipment was allowed, for them to warm up to their normal operating condition.
- If device is a DC powered device with no dedicated AC/DC power converter, a random converter is provided to the test set-up.
- AC power lines of EUT are checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz is searched using PEAK, QUASI-PEAK and AVERAGE function of the receiver.
- If applicable functions are changed (data transfer speed, clock speed....) it should be noted in the test report.

9.1.2 Test results according to 47 CFR Part 15.107 and ICES-003

Operating mode(s):	1
--------------------	---

EUT Information

EUT: NOTE-MBNAW
Operating mode: Uin: 120 V / 60 Hz, LTE
Lines: L + N

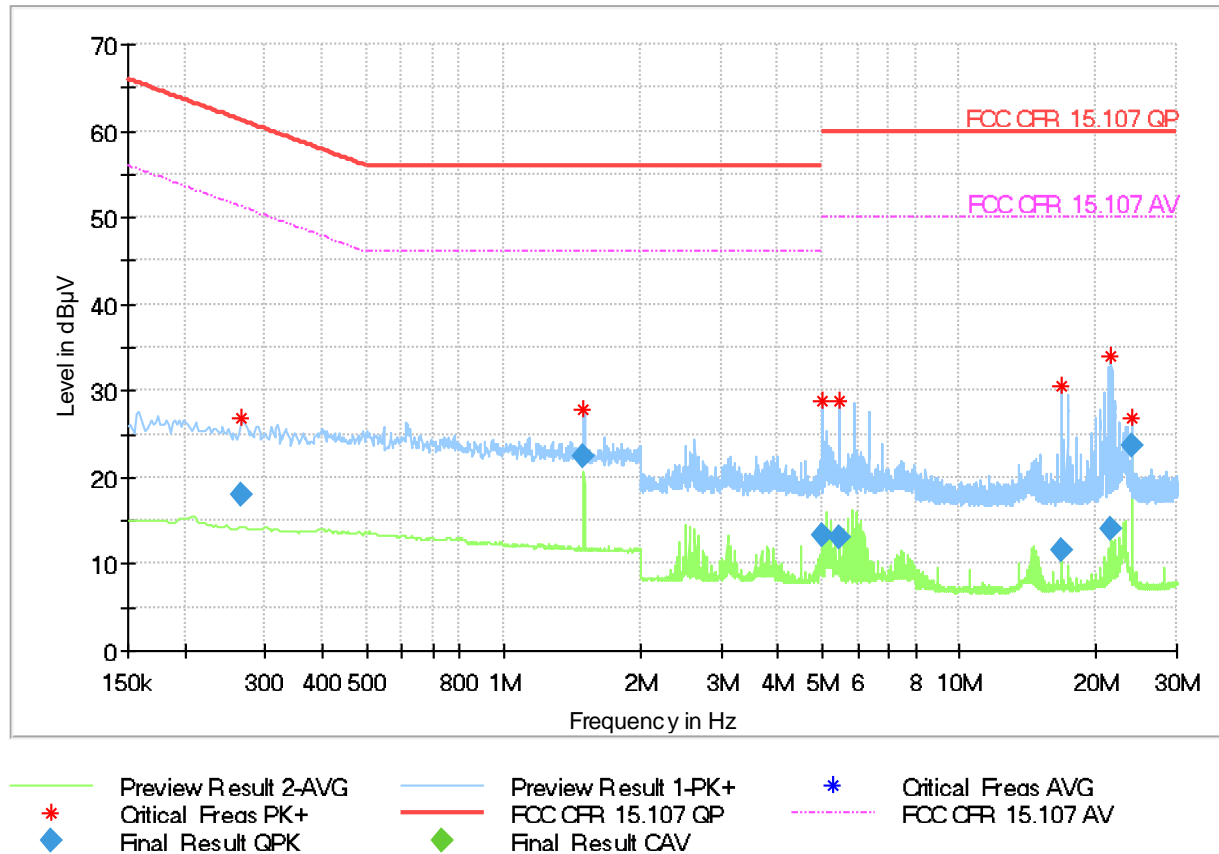

Final_Result


Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
1.500000	22.54	---	56.00	33.46	1000.0	9.000	N	ON	9.8
23.997750	23.72	---	60.00	36.28	1000.0	9.000	N	ON	10.0
0.267000	17.92	---	61.21	43.29	1000.0	9.000	N	ON	9.9
21.583500	13.94	---	60.00	46.06	1000.0	9.000	L1	ON	10.0
5.014500	13.37	---	60.00	46.63	1000.0	9.000	L1	ON	9.8
5.451000	12.95	---	60.00	47.05	1000.0	9.000	L1	ON	9.8
16.793250	11.55	---	60.00	48.45	1000.0	9.000	L1	ON	9.9



EUT Information

EUT:
Operating mode:
Lines

NOTE-MBNAW
Uin: 120 V / 60 Hz, WiFi
L + N

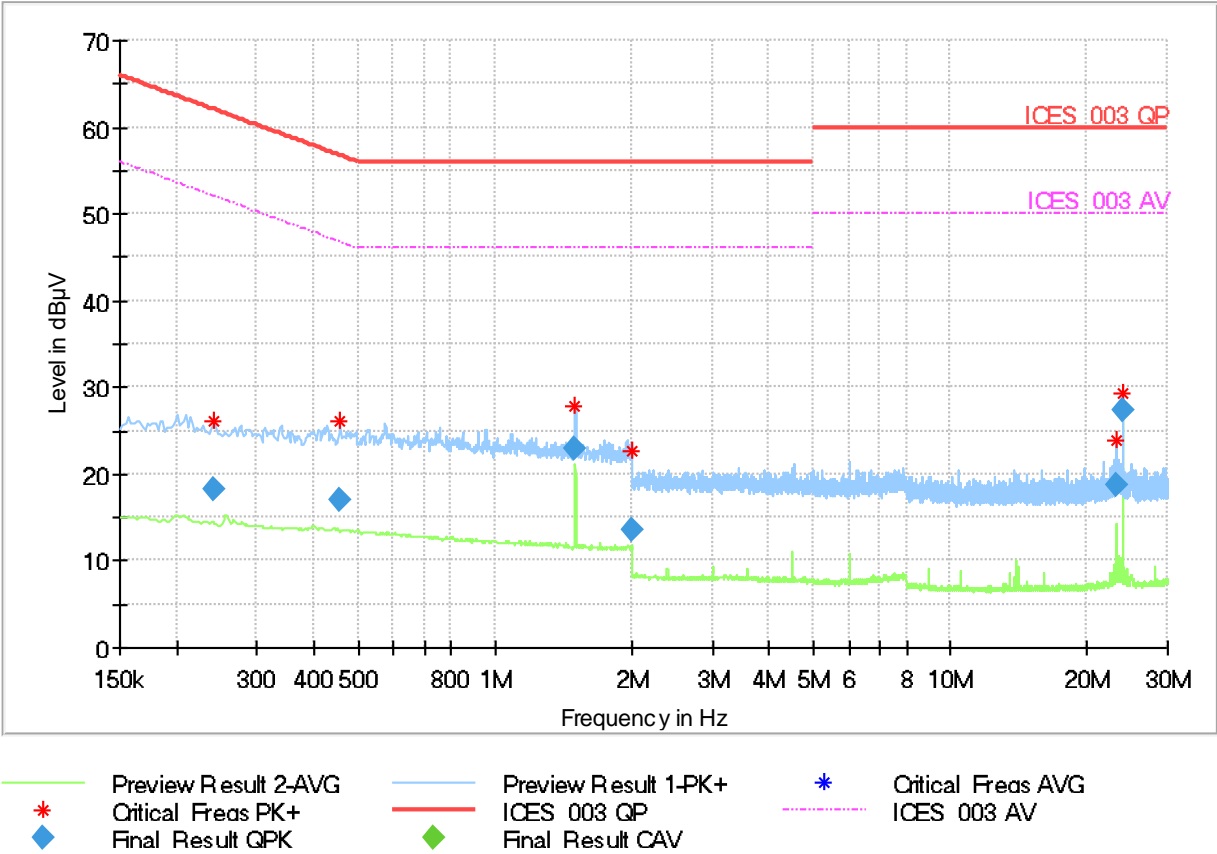

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
24.000000	27.24	---	60.00	32.76	1000.0	9.000	N	ON	10.0
1.500000	22.99	---	56.00	33.01	1000.0	9.000	L1	ON	9.8
0.456000	17.06	---	56.77	39.70	1000.0	9.000	N	ON	10.1
23.129250	18.81	---	60.00	41.19	1000.0	9.000	N	ON	10.0
1.999500	13.60	---	56.00	42.40	1000.0	9.000	N	ON	9.8
0.242250	18.20	---	62.02	43.82	1000.0	9.000	L1	ON	9.9

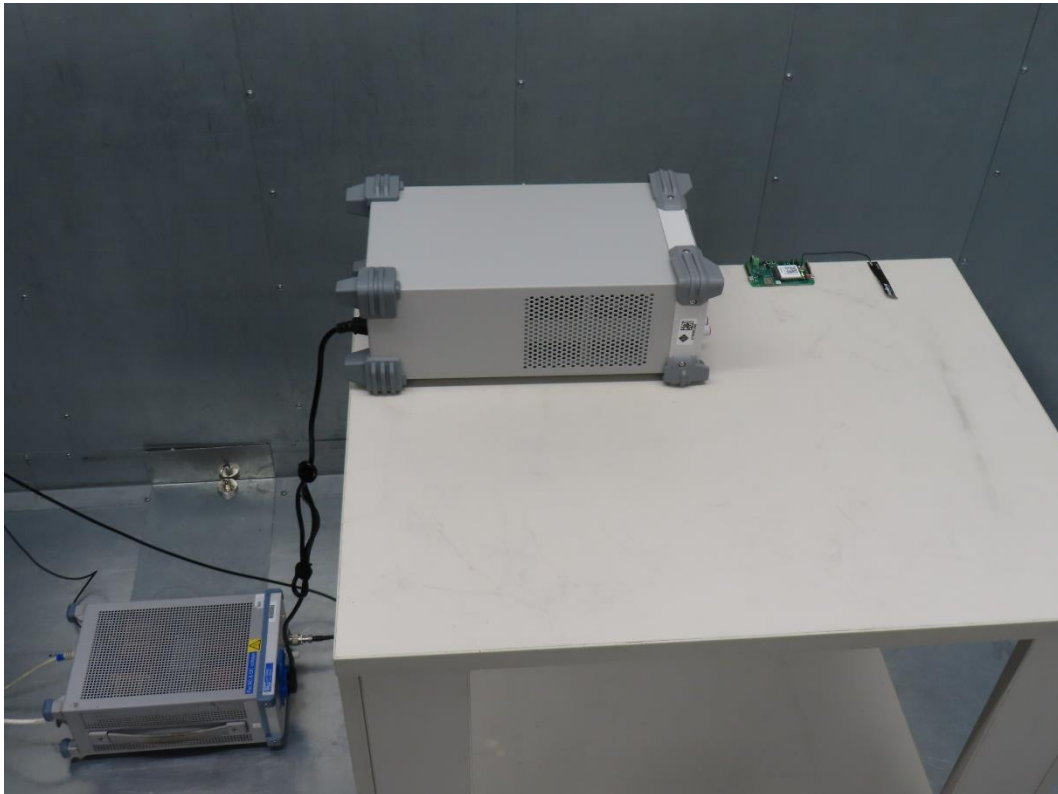


Figure 1: Test setup for conducted emission measurement

9.2 Radiated emission measurement

9.2.1 Test procedure

- **For equipment tested as table-top:**
The EUT is placed on a non-conductive 0.8 meters high table with EUT being directly or via AC/DC power supply connected to the power mains.
- **For equipment tested as floor-standing:**
The EUT is placed on a non-conductive 0.1 meters high table with EUT being directly or via AC/DC power supply connected to the power mains.
- The EUT is set 3 m away from the interference-receiving antenna, which was mounted on the top of variable-height antenna tower.
- The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT is arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the turn table is turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system is set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- The highest points are to be re-tested one by one using the quasi-peak method.
- In case of a Class A device in frequency range of up to 1 GHz, a calculation of highest 5 points is made from 3m to a 10 m distance. For points over 10 dB under the limit, the calculation is not performed.
- CMAD has not been applied in test setup.

9.2.2 Test results according to 47 CFR Part 15.109

Operating mode(s):	1
--------------------	---

EUT Information


EUT:

NOTE-MBNAW

Operating mode:

Uin: 120 V / 60 Hz, LTE

Full Spectrum

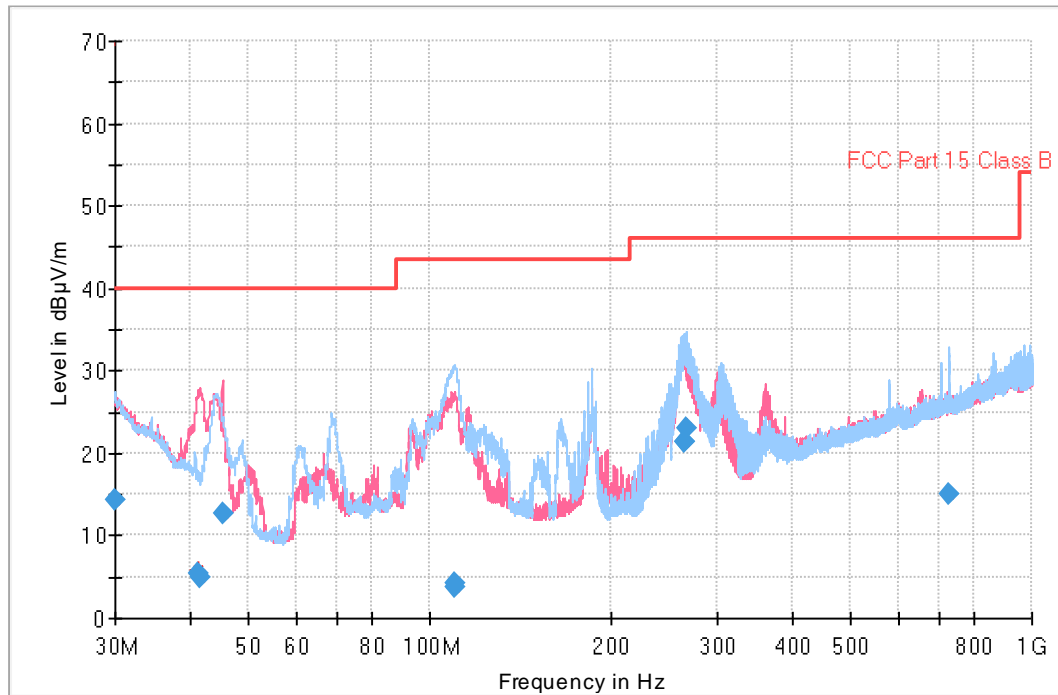

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr (dB/)
109.680000	3.68	43.50	39.82	10000.0	120.000	191.0	H	109.0	11.6
110.010000	4.13	43.50	39.37	10000.0	120.000	192.0	H	109.0	11.6
41.490000	4.99	40.00	35.01	10000.0	120.000	138.0	V	301.0	12.9
41.190000	5.43	40.00	34.57	10000.0	120.000	138.0	V	301.0	13.1
45.210000	12.64	40.00	27.36	10000.0	120.000	188.0	V	145.0	10.6
30.060000	14.39	40.00	25.61	10000.0	120.000	188.0	H	286.0	19.8
729.540000	15.00	46.00	31.00	10000.0	120.000	103.0	H	267.0	21.3
264.120000	21.26	46.00	24.74	10000.0	120.000	138.0	H	347.0	11.6
264.210000	21.46	46.00	24.54	10000.0	120.000	138.0	H	357.0	11.6
266.610000	23.06	46.00	22.94	10000.0	120.000	138.0	H	357.0	11.6

EUT Information


EUT:

Operating mode :

NOTE-MBNAW

Uin: 120 V / 60 Hz, LTE

Full Spectrum

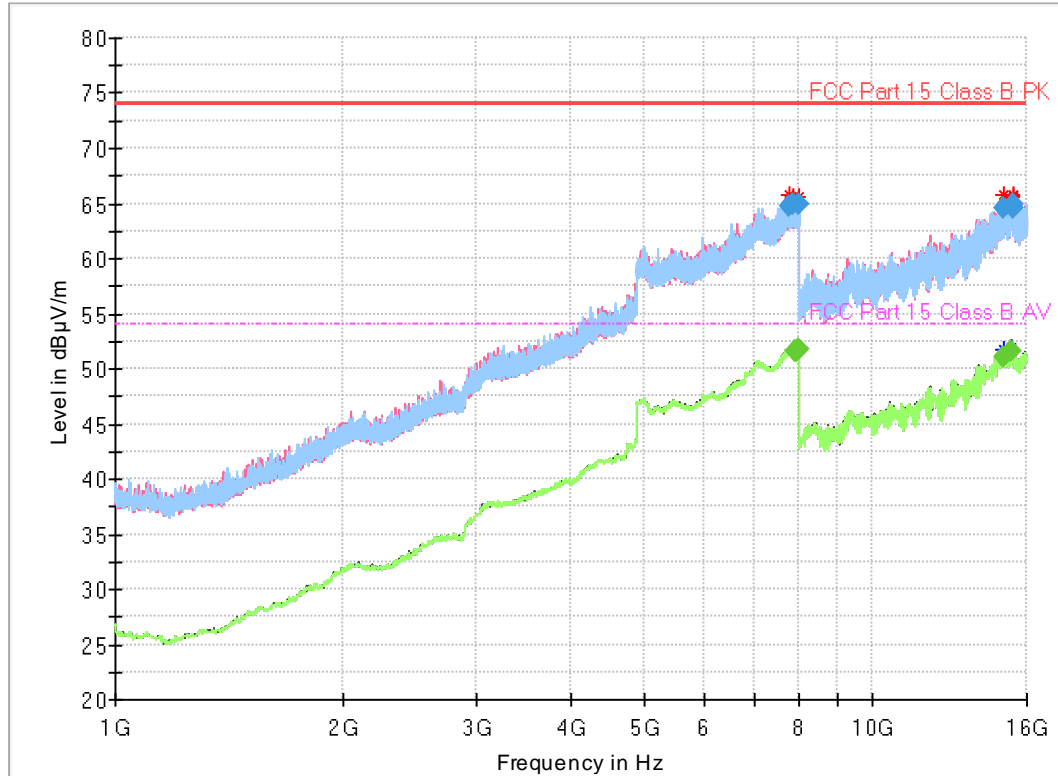

Final_Result


Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
7998.500000	---	51.78	54.00	2.22	5000.0	1000.000	150.0	V	359.0
7973.000000	---	51.65	54.00	2.35	5000.0	1000.000	150.0	V	262.0
15269.500000	---	51.55	54.00	2.45	5000.0	1000.000	150.0	H	153.0
7949.750000	---	51.51	54.00	2.49	5000.0	1000.000	100.0	H	2.0
7884.750000	---	51.50	54.00	2.50	5000.0	1000.000	150.0	V	208.0
14922.250000	---	51.10	54.00	2.90	5000.0	1000.000	150.0	H	2.0
15311.500000	64.88	---	74.00	9.12	5000.0	1000.000	100.0	H	0.0
7837.500000	64.87	---	74.00	9.13	5000.0	1000.000	100.0	V	45.0
7993.000000	64.84	---	74.00	9.16	5000.0	1000.000	150.0	H	99.0
7766.500000	64.66	---	74.00	9.34	5000.0	1000.000	100.0	V	153.0
14903.500000	64.59	---	74.00	9.41	5000.0	1000.000	100.0	H	261.0
15341.500000	64.51	---	74.00	9.49	5000.0	1000.000	100.0	H	358.0

Operating mode(s):	2
--------------------	---

EUT Information

EUT: NOTE-MBNAW
Operating mode: Uin: 120 V / 60 Hz, WiFi

Full Spectrum

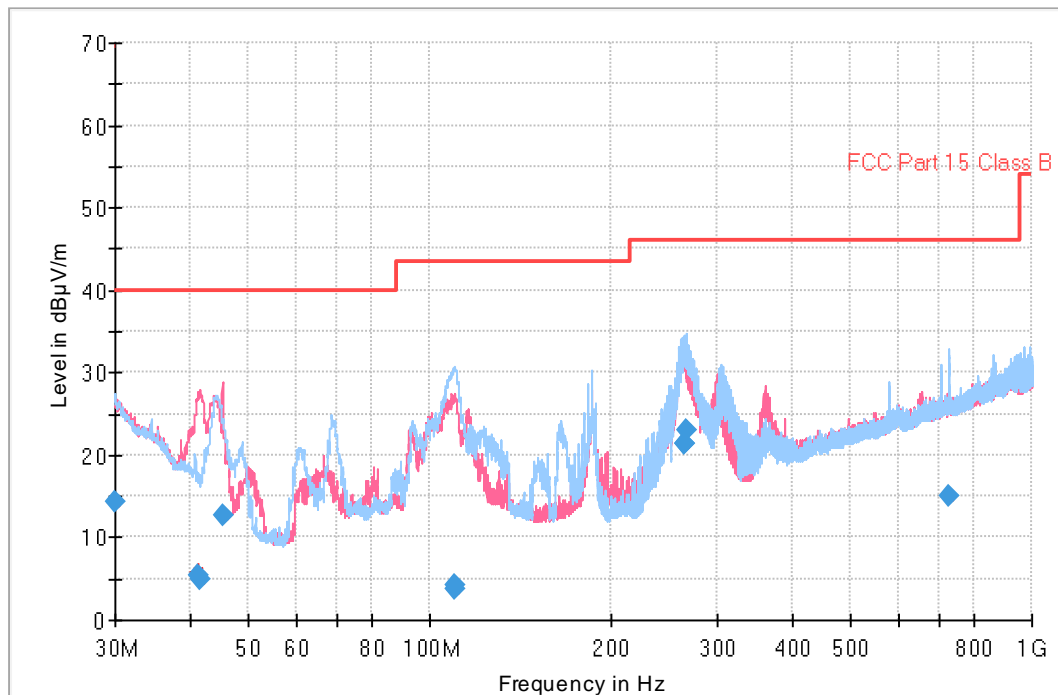

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr (dB)
109.680000	3.68	43.50	39.82	10000.0	120.000	191.0	H	109.0	11.6
110.010000	4.13	43.50	39.37	10000.0	120.000	192.0	H	109.0	11.6
41.490000	4.99	40.00	35.01	10000.0	120.000	138.0	V	301.0	12.9
41.190000	5.43	40.00	34.57	10000.0	120.000	138.0	V	301.0	13.1
45.210000	12.64	40.00	27.36	10000.0	120.000	188.0	V	145.0	10.6
30.060000	14.39	40.00	25.61	10000.0	120.000	188.0	H	286.0	19.8
729.540000	15.00	46.00	31.00	10000.0	120.000	103.0	H	267.0	21.3
264.120000	21.26	46.00	24.74	10000.0	120.000	138.0	H	347.0	11.6
264.210000	21.46	46.00	24.54	10000.0	120.000	138.0	H	357.0	11.6
266.610000	23.06	46.00	22.94	10000.0	120.000	138.0	H	357.0	11.6

EUT Information


EUT:

NOTE-MBNAW

Operating mode:

Uin: 120 V / 60 Hz, WiFi

Full Spectrum

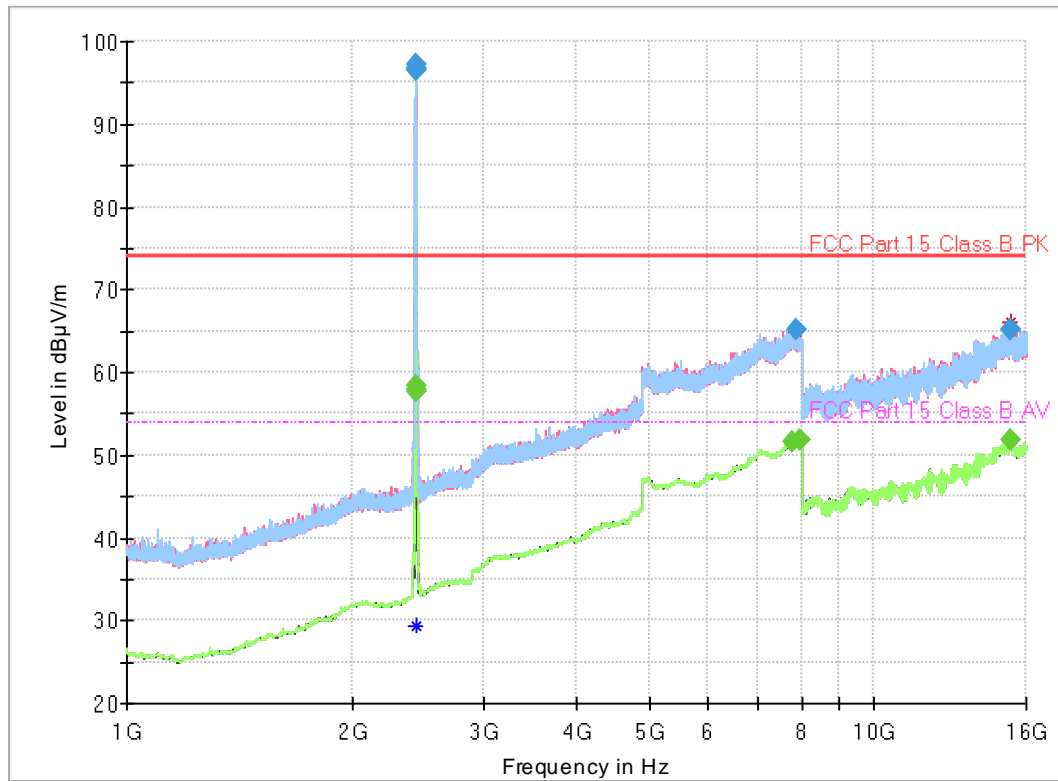

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr (dB)
2436.250000	97.16	---	74.00	-23.16	1000.000	100.0	H	45.0	32.2
2438.000000	96.78	---	74.00	-22.78	1000.000	100.0	H	45.0	32.2
2438.500000	96.45	---	74.00	-22.45	1000.000	100.0	H	45.0	32.2
2436.250000	---	58.34	54.00	-4.34	1000.000	103.0	H	45.0	32.2
2437.750000	---	57.97	54.00	-3.97	1000.000	103.0	H	45.0	32.2
2438.250000	---	57.64	54.00	-3.64	1000.000	103.0	H	45.0	32.2
15267.250000	---	51.78	54.00	2.22	1000.000	103.0	V	45.0	50.1
7998.500000	---	51.76	54.00	2.24	1000.000	138.0	V	261.0	43.0
7786.750000	---	51.50	54.00	2.50	1000.000	138.0	V	98.0	43.0
15251.750000	65.24	---	74.00	8.76	1000.000	138.0	V	207.0	50.1
15264.500000	65.18	---	74.00	8.82	1000.000	142.0	H	45.0	50.1
7896.000000	65.07	---	74.00	8.93	1000.000	142.0	V	261.0	42.9

*Note: Frequencies from RF transmitters and their bands are not to be evaluated and should be excluded. WLAN Bands can be excluded: 2.4 to 2.4835 GHz.


9.2.3 Test results according to ICES-003

Operating mode(s):	1
--------------------	---

EUT Information

EUT: NOTE-MBNAW
Operating mode: Uin: 120 V / 60 Hz, LTE

Full Spectrum

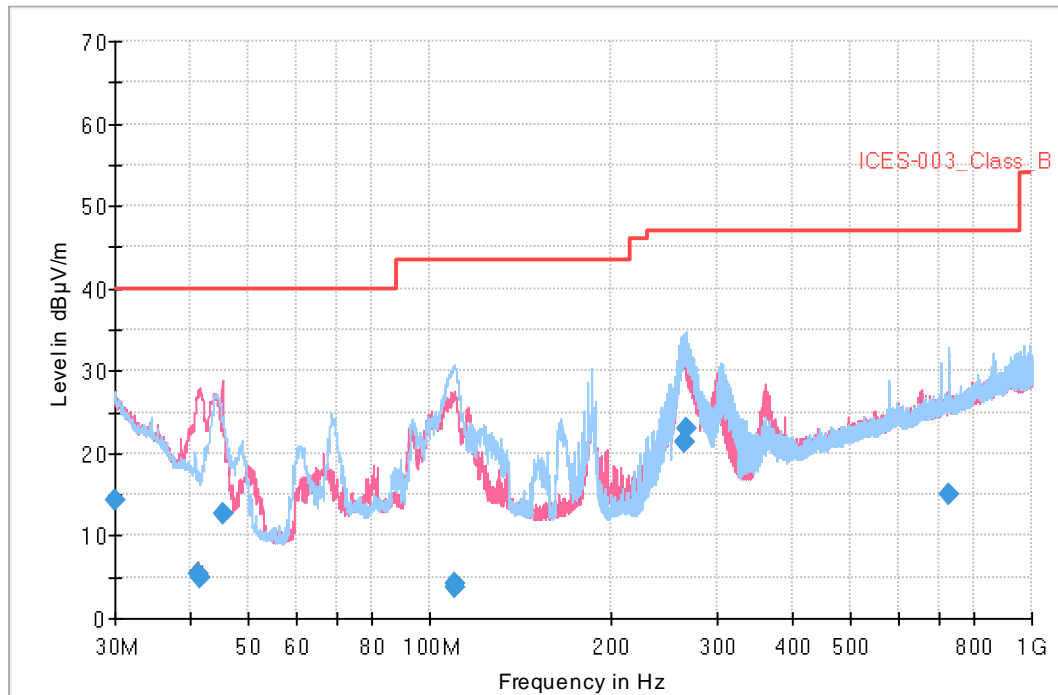

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth h (kHz)	Height (cm)	Pol	Azimuth h (deg)	Corr (dB/)
266.610000	23.06	47.00	23.94	10000.0	120.000	138.0	H	357.0	11.6
264.210000	21.46	47.00	25.54	10000.0	120.000	138.0	H	357.0	11.6
30.060000	14.39	40.00	25.61	10000.0	120.000	188.0	H	286.0	19.8
264.120000	21.26	47.00	25.74	10000.0	120.000	138.0	H	347.0	11.6
45.210000	12.64	40.00	27.36	10000.0	120.000	188.0	V	145.0	10.6
729.540000	15.00	47.00	32.00	10000.0	120.000	103.0	H	267.0	21.3
41.190000	5.43	40.00	34.57	10000.0	120.000	138.0	V	301.0	13.1
41.490000	4.99	40.00	35.01	10000.0	120.000	138.0	V	301.0	12.9
110.010000	4.13	43.50	39.37	10000.0	120.000	192.0	H	109.0	11.6
109.680000	3.68	43.50	39.82	10000.0	120.000	191.0	H	109.0	11.6

EUT Information


EUT:

Operating mode :

NOTE-MBNAW

Uin: 120 V / 60 Hz, LTE

Full Spectrum

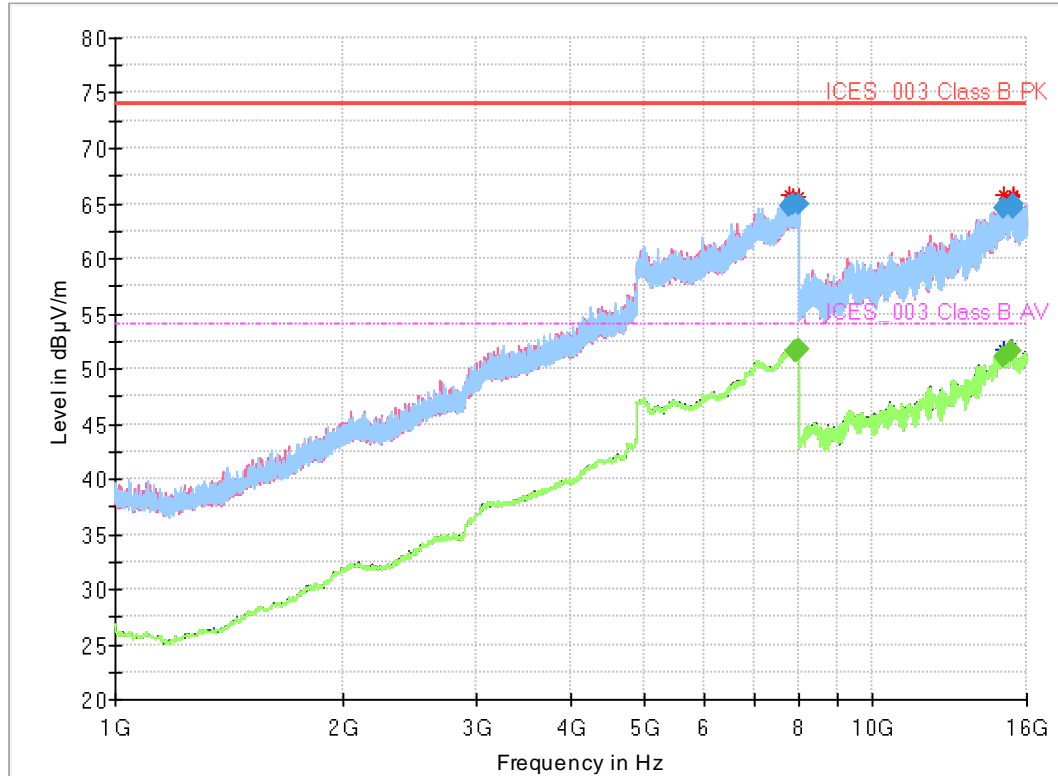

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
7998.500000	---	51.78	54.00	2.22	5000.0	1000.000	150.0	V	359.0
7973.000000	---	51.65	54.00	2.35	5000.0	1000.000	150.0	V	262.0
15269.500000	---	51.55	54.00	2.45	5000.0	1000.000	150.0	H	153.0
7949.750000	---	51.51	54.00	2.49	5000.0	1000.000	100.0	H	2.0
7884.750000	---	51.50	54.00	2.50	5000.0	1000.000	150.0	V	208.0
14922.250000	---	51.10	54.00	2.90	5000.0	1000.000	150.0	H	2.0
15311.500000	64.88	---	74.00	9.12	5000.0	1000.000	100.0	H	0.0
7837.500000	64.87	---	74.00	9.13	5000.0	1000.000	100.0	V	45.0
7993.000000	64.84	---	74.00	9.16	5000.0	1000.000	150.0	H	99.0
7766.500000	64.66	---	74.00	9.34	5000.0	1000.000	100.0	V	153.0
14903.500000	64.59	---	74.00	9.41	5000.0	1000.000	100.0	H	261.0
15341.500000	64.51	---	74.00	9.49	5000.0	1000.000	100.0	H	358.0

Operating mode(s):

2

EUT Information


EUT:

NOTE-MBNAW

Operating mode:

Uin: 120 V / 60 Hz, WiFi

Full Spectrum

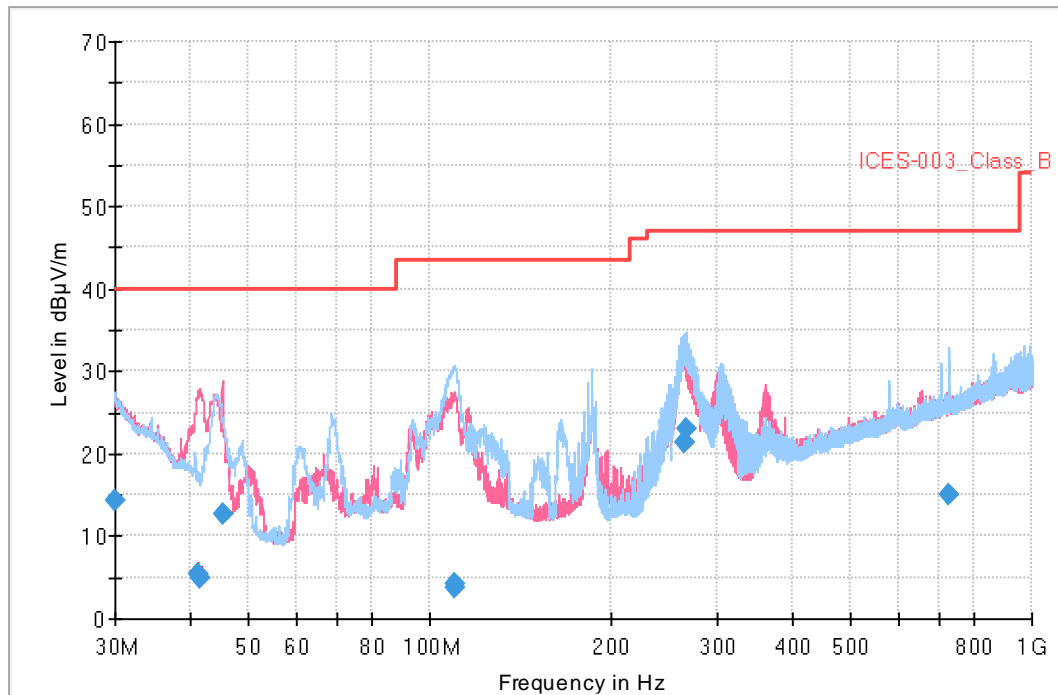

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr (dB/)
266.610000	23.06	47.00	23.94	10000.0	120.000	138.0	H	357.0	11.6
264.210000	21.46	47.00	25.54	10000.0	120.000	138.0	H	357.0	11.6
30.060000	14.39	40.00	25.61	10000.0	120.000	188.0	H	286.0	19.8
264.120000	21.26	47.00	25.74	10000.0	120.000	138.0	H	347.0	11.6
45.210000	12.64	40.00	27.36	10000.0	120.000	188.0	V	145.0	10.6
729.540000	15.00	47.00	32.00	10000.0	120.000	103.0	H	267.0	21.3
41.190000	5.43	40.00	34.57	10000.0	120.000	138.0	V	301.0	13.1
41.490000	4.99	40.00	35.01	10000.0	120.000	138.0	V	301.0	12.9
110.010000	4.13	43.50	39.37	10000.0	120.000	192.0	H	109.0	11.6
109.680000	3.68	43.50	39.82	10000.0	120.000	191.0	H	109.0	11.6

EUT Information


EUT:

Operating mode:

NOTE-MBNAW

Uin: 120 V / 60 Hz, WiFi

Full Spectrum

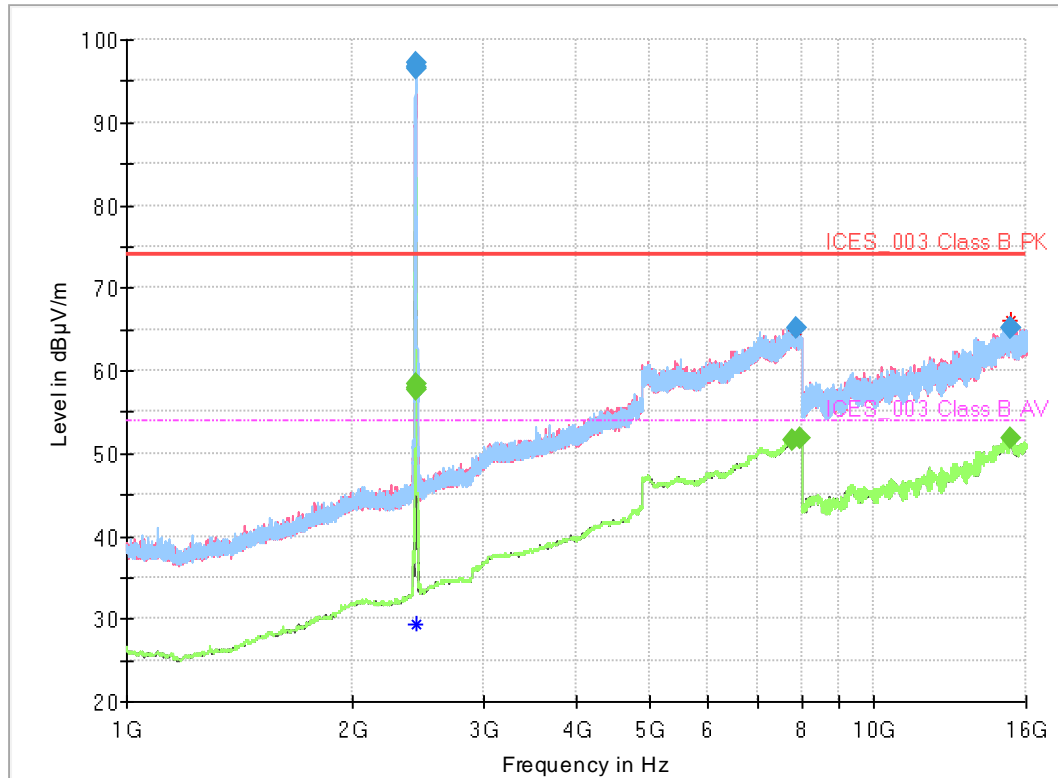

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr (dB)
2436.250000	97.16	---	74.00	-23.16	1000.000	100.0	H	45.0	32.2
2438.000000	96.78	---	74.00	-22.78	1000.000	100.0	H	45.0	32.2
2438.500000	96.45	---	74.00	-22.45	1000.000	100.0	H	45.0	32.2
2436.250000	---	58.34	54.00	-4.34	1000.000	103.0	H	45.0	32.2
2437.750000	---	57.97	54.00	-3.97	1000.000	103.0	H	45.0	32.2
2438.250000	---	57.64	54.00	-3.64	1000.000	103.0	H	45.0	32.2
15267.250000	---	51.78	54.00	2.22	1000.000	103.0	V	45.0	50.1
7998.500000	---	51.76	54.00	2.24	1000.000	138.0	V	261.0	43.0
7786.750000	---	51.50	54.00	2.50	1000.000	138.0	V	98.0	43.0
15251.750000	65.24	---	74.00	8.76	1000.000	138.0	V	207.0	50.1
15264.500000	65.18	---	74.00	8.82	1000.000	142.0	H	45.0	50.1
7896.000000	65.07	---	74.00	8.93	1000.000	142.0	V	261.0	42.9

*Note: Frequencies from RF transmitters and their bands are not to be evaluated and should be excluded. WLAN Bands can be excluded: 2.4 to 2.4835 GHz.

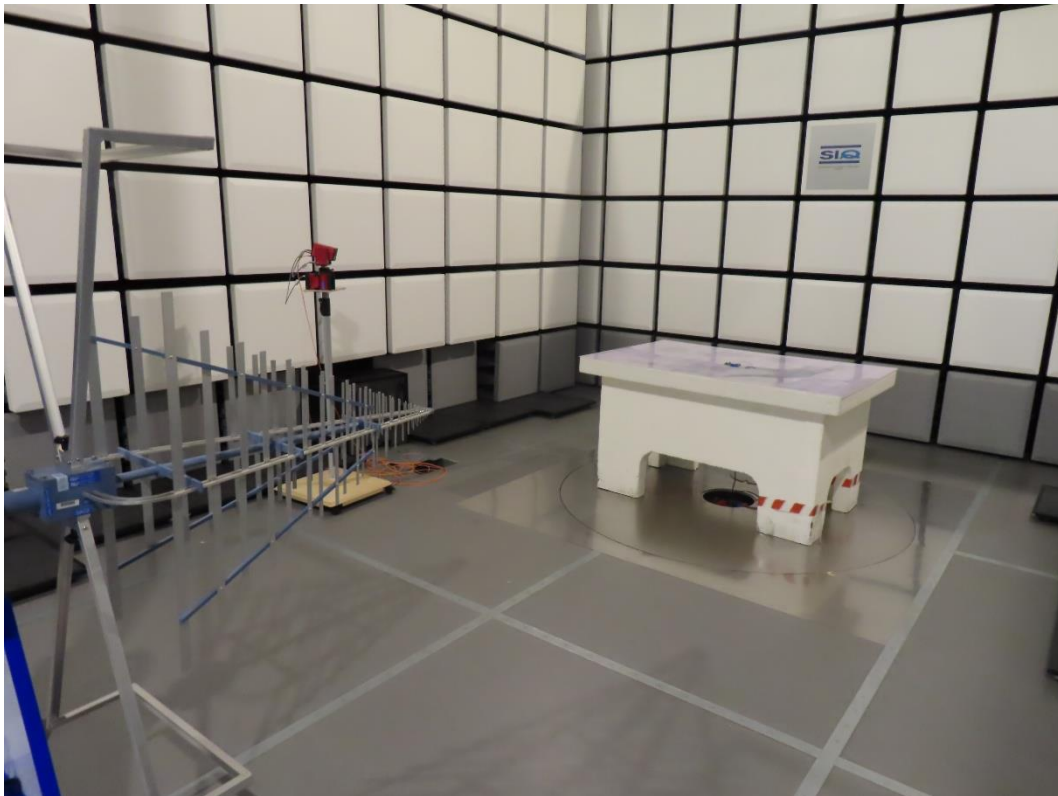


Figure 2: Test setup for radiated emission measurement – up to 1 GHz

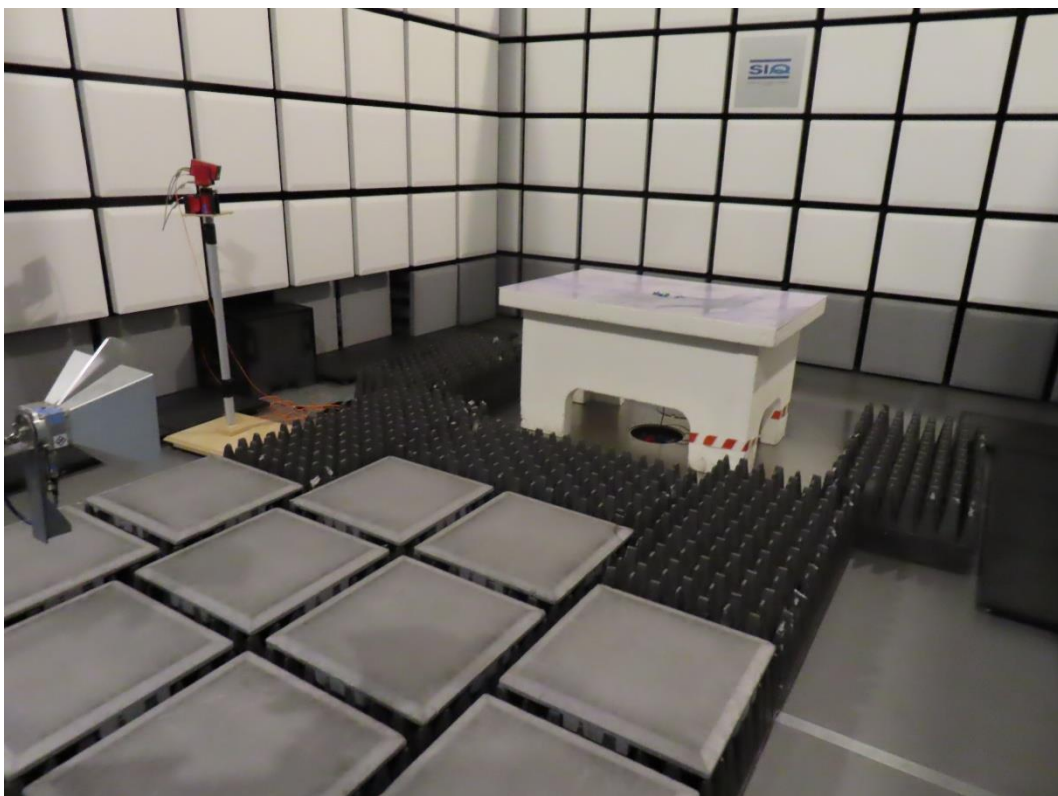


Figure 3: Test setup for radiated emission measurement – over 1 GHz

10. Used test equipment

9.1 Conducted emission measurement

Equipment	Manufacturer	Type	Equipment Number	Calibration date	Due date
EMI test receiver	Rohde-Schwarz	ESW44	EM0291	2024-09	2026-03
Artificial main network	Rohde-Schwarz	ENV216	EM0009	2022-06	2025-06

9.2 Radiated emission measurement

Equipment	Manufacturer	Type	Equipment Number	Calibration date	Due date
EMI test receiver	Rohde-Schwarz	ESW44	EM0291	2024-11	2026-05
Semi Anechoic Chamber SAC 1	Comtest Engineering	SAC 3m	EM0145	2025-03	2028-03
Ultra Broadband Antenna	Rohde-Schwarz	HL562E	EM0140	2023-07	2025-07
Horn Antenna	Rohde-Schwarz	HF907	EM0141	2023-06	2025-06
Horn Antenna	EMCO	3116	EM0179	2024-11	2027-11
Turn table (2 m diameter)	Maturo	TT 2.0 SI	/	N/A	N/A
Bore-sight antenna mast	Maturo	BAM-4.0-P	/	N/A	N/A
Multi-channel positioning equipment	Maturo	Maturo NCD	/	N/A	N/A

-----END OF TEST REPORT-----